# AND AND

## ACRF Q10

Powerful motor. Levelling control. Limit setting. The AC motor can provide continuous power and is the ideal solution when establishing wiring during a renovation or new build.



#### BI-DIRECTIONAL COMMUNICATION

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade postioning via the Automate Pulse 2 app.



Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.




#### FAVORITE POSITIONING

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite".



#### PRECISE LIMIT ADJUSTMENT

Incremental steps during limit setting allows for precise positioning of the

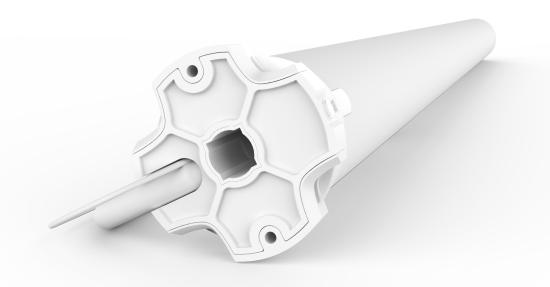










#### PRODUCT SPECIFICATIONS

Part #: MT01-1145-069002 ACRF Q10 Motor Quiet (Ø45/10Nm/21rpm) - 118" Cord Part #: MT01-1145-069004 ACRF Q10 Motor Quiet (Ø45/10Nm/21rpm) - 240" Cord

Voltage	120 A/C	Limit Switch Type	Electronic
Torque	10Nm	Current	1A
Max Run Time	4 min	Temp Working Range	32°F to 140°F (0°C to 60°C)
Speed	21 RPM	Insulation Class	III
Radio Frequency	433.92 MHz	Sound Level	~46 dB
RF Modulation	FSK	Power	121
IP Rating	IP44		

#### **DIMENSIONS**

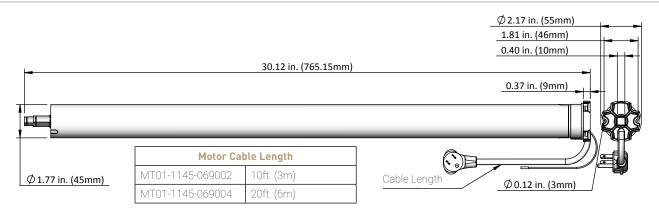

**Crown & Drives** 

#### **COMPATIBLE PARTS**







2-1/2" Tube	MTCRDR-45-2.5	
3-1/4" Tubes	MTCRDR-45-3.25	
S60 Tube	RB56-0336-050502	
63mm Aluminum Tube	RE01-0666-xxx508/ RE01-0666-xxx518	
S80 Tube	RB56-0338-050502	

#### **Adaptors**



- RB56-0701-xxx518
- RB56-0711-069519
- MTAD-45-SL

#### **COMPATIBLE SYSTEMS**

- Veue
- S60 Large Roller Shades

### COMPATIBLE ACCESSORIES (refer to catalog for full item listings)

#### Controllers





Pulse 2 HUB

Push 5 remotes