

RB09 CHAIN WINDER

FEATURES & BENEFITS

- Patent protected snap-lock chain assembly to reduce fabrication time by up to 75%.
- Patent protected Easy-Lock Idler with industry leading on-site adjustment.
- Easy Lift Spring Booster achieves a lighter lifting solution, can also be retrofit on site.
- Heavy Duty bracket adaptor available for commercial use.
- Premium component design ensure a smooth and easy shade solution in a high polish finish.
- Chain Guide is designed for optimal double bracket user experience and the Direct Chain Guide can be installed in fixed or swivel configurations.
- RB09 Geared chain winder provides a cost-effective solution to reduce user effort by up to 40% (shade is lighter to lift).



COLOUR RANGE

black

pure white

sandstone

silver grey

WEB PAGE LINK

HARDWARE

10 YEAR WARRANTY

RB09 CHAIN WINDER

OPTIONS

DIRECT

GEARED

HARDWARE CONTROLS


BRACKETS

TUBES

BOTTOM RAILS

KEY SYSTEM FEATURES


SNAP-LOCK CHAIN ASSEMBLY

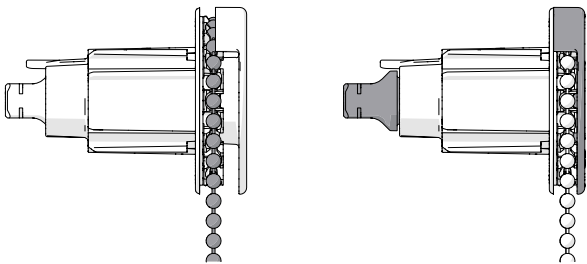

1. Add Chain.


2. Push Cover In.

RB09 DIRECT | FIXED OR SWIVEL OPTIONS

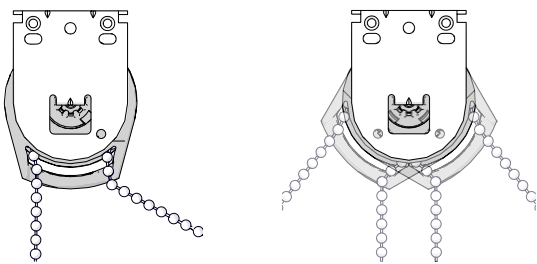


Swivel is ideal for installations above furniture & appliances.

10mm INSTALLATION ADJUSTMENT

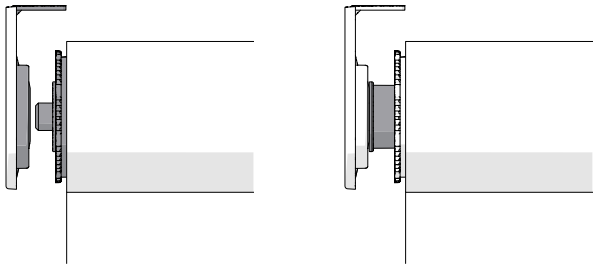

Rotate disk clockwise to extend the pin in 1mm increments.

RB09 GEARED | ECONOMICAL LIGHTER LIFT SOLUTION

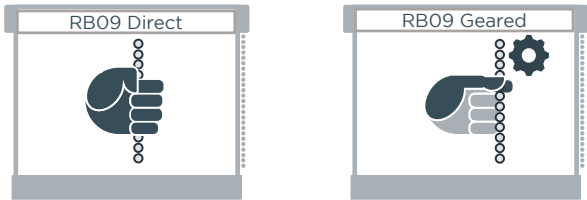

Cost effective solution to reduce user effort by up to 40%.

MEDIUM SYSTEM UPGRADES & OPTIONS:

S45 TO S60

WIRE GUIDE

EASY-LINK

MOUNTING RAIL


FRS VALANCE

P95 PELMET

CF90


RB09 SPECIFICATIONS

TUBE CAPACITY

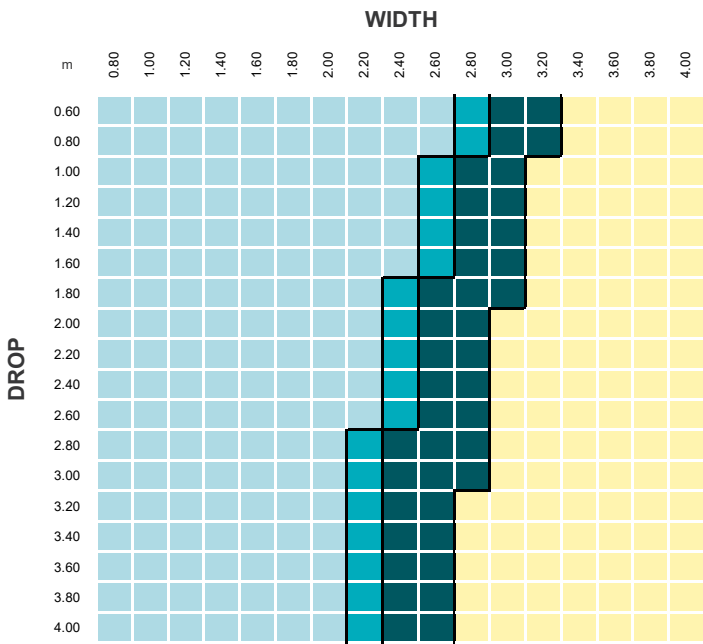

| TUBES | | PARAMETERS: |
|------------------|--|-----------------------------|
| S45 LIGHT | | |
| S45 STANDARD | | |
| S45 HEAVY DUTY | | |
| S45 LINKED | | |
| | | FABRIC DENSITY: 390gsm |
| | | FABRIC THICKNESS: 0.6mm |
| | | WEIGHT BAR: D30 Bottom Rail |
| | | TUBE DEFLECTION: 1.05mm/m |

CONTROL CAPACITY

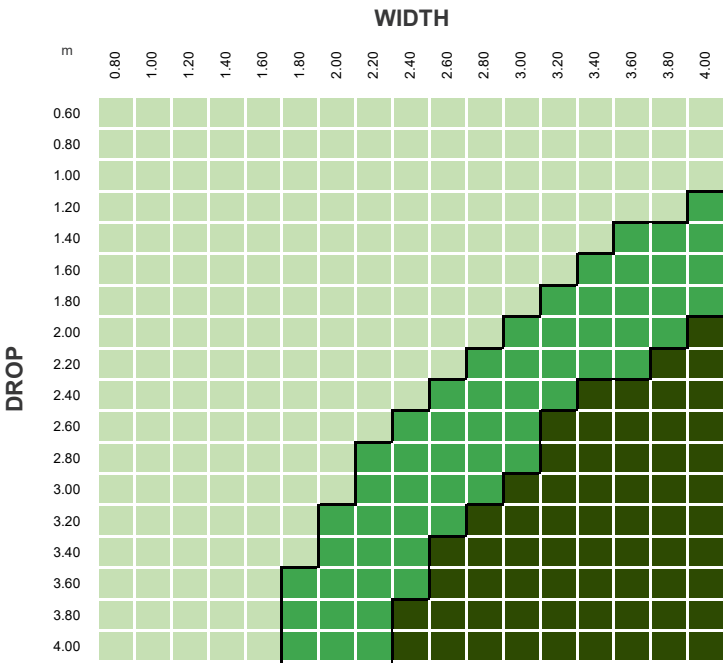

| | | |
|------------------------------------|--|---|
| RB09 CONTROL | | PARAMETERS: FABRIC DENSITY: 390gsm FABRIC THICKNESS: 0.6mm WEIGHT BAR: D30 Bottom Rail TUBE DEFLECTION: 1.05mm/m |
| DIRECT OR GEARED | | |
| DIRECT w. BOOSTER OR GEARED | | |
| BOOSTER REQUIRED | | |
| | | |

| HOLDING CAPACITY | TUBE | | |
|------------------|--------|---------|--------|
| | S45 LT | S45 STD | S45 HD |
| RB09 | 4.7kg | 4.6kg | 4.2kg |
| STD BOOSTER | 9.1kg | 8.9kg | 8.0kg |
| HD BOOSTER | 13.3kg | 13.1kg | 11.8kg |

Operating shades at maximum holding capacity will not produce comfortable pull forces.

TECHNICAL DATA

| SINGLE BRACKETS | SPECIFICATIONS | | | MAX ROLL |
|-----------------|----------------|-------|--------|----------|
| | PITCH | WIDTH | HEIGHT | |
| LX | 40mm | 50mm | 65mm | 75mm |
| | 55mm | 50mm | 80mm | 105mm |

| CONTROL OPTIONS | MINIMUM SHADE WIDTH (no covers) | TUBE DEDUCTIONS | |
|-----------------|---------------------------------|-------------------|---------------------|
| | | NO BRACKET COVERS | WITH BRACKET COVERS |
| RB09 | 150mm | 28mm | 31mm |
| RB09 Geared | 150mm | | |
| + STD BOOSTER | 817mm | | |
| + HD BOOSTER | 937mm | | |

Minimum Shade Width based on 5mm gap between hardware in tube.

| DOUBLE BRACKETS | MAX ROLL | SLIM PROFILE TOP-FRONT Fabric Roll Options | SLIM PROFILE TOP-BACK Fabric Roll Options | SQUARE-X Fabric Roll Options | SLIMLINE-X Fabric Roll Options |
|-----------------------|----------|---|--|---------------------------------|-----------------------------------|
| SLIM PROFILE/SQUARE-X | 70mm | | | | |
| SLIMLINE-X | 65mm | | | | |