## S45 TO S60 ADAPTOR

## **FEATURES & BENEFITS**


- Utilise S45 hardware with S60 tubes to improve shade performance up to 3.4m x 2.4m.
- S45 55mm pitch LX Brackets achieve a larger roll diameter with a slimmer aesthetic.
- Use with 3.6m lengths of S60 Taped tube to reduce wastage.



## **MOUNTING SOLUTIONS**





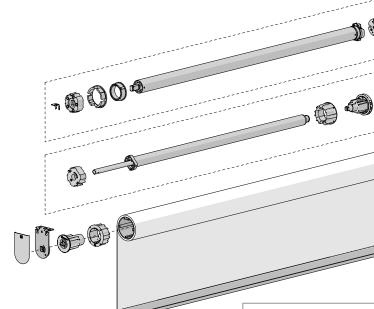



BOTTOM RAILS

	SYSTEM
U	PGRADES

	SYSTEM CAPACITY																	
	WIDTH																	
	m	0.80	1.00	1.20	1.40	1.60	1.80	2.00	2.20	2.40	2.60	2.80	3.00	3.20	3.40	3.60	3.80	4.00
	0.60																	
	0.80																	
	1.00																	
	1.20																	
	1.40																	
	1.60																	
	1.80																	
	2.00																	
DROP	2.20																	
P	2.40																	
	2.60																	
	2.80																	
	3.00																	
	3.20																	
	3.40																	
	3.60																	
	3.80																	
	4.00																	
BOOSTER											PARAMETERS:							
RECOMMENDED											FABRIC DENSITY: 390gsm							
REQUIRED									FABRIC THICKNESS: 0.6mm									
*OUTSIDE SPECIFICATIONS									WEIGHT BAR: D30 Bottom Rail									
									TUBE DEFLECTION: 1.05mm/m									



TUBE WIDTH = SHADE WIDTH - [CONTROL + IDLER]

Minimum Shade Width based on 5mm gap between hardware in tube.



_X/LX M40	55mm	50mm	80mm	
		WIDTH	+	
	HEIGHT	ØMAX RO	PITCH	-