

AUTOMATE C MOTORIZED CURTAIN SYSTEM

Our Automate C motor and curtain track solution offers a complete motorised curtain solution. Featuring a smart SOFT open and close function with auto adjusting speed limits. This impressive motor is operated by our Automate Paradigm remote controls, is quiet for optimal acoustic comfort and comes complete with a 5 year warranty.

AESTHETICAL FEATURES


- Slim profile curtain track.
- Pre-made corner 90 degree corner bends.
- Track Joiner allowing multiple tracks to be seamlessly linked.
- S-Fold curtain compatible parts for snap tape.

FUNCTIONAL BENEFITS

- Centre and one way draw for straight and curved applications.
- Soft open and close auto adjusting speed limits.
- Manual override function to open/close with one light touch.
- Quiet motor.
- 50kg max lifting capacity.
- Built in receiver for radio control.
- ARC Bi-directional communication.
- Paradigm Remote or smart phone control.

INSTALLATION/ ASSEMBLY FEATURES


- Easy automatic limit setting.
- Top Fix and Wall Fix installation.
- Double bracket for a two wall mounted curtains configuration.
- Dual day/night curtain functionality

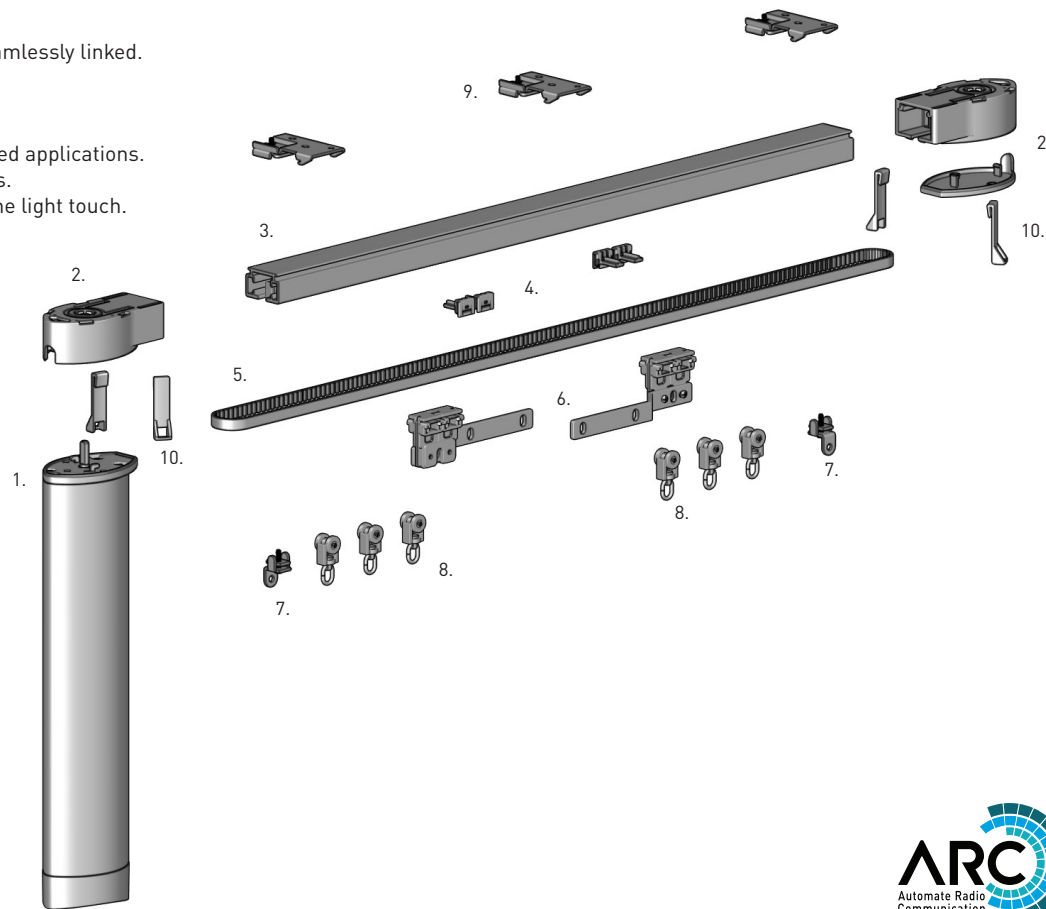



SYSTEM INDEX

1.	AUTOMATE C ARC Drape Motor
(a)	MT01-2101-xxx001 (AU)
(b)	MTACRFDR-50KG (US)
(c)	MTACRFDR-50KGLC (US)
2.	Drive Unit Kit for ARC Motor CU21-0211-062001
3.	Curtain Track CU21-0101-062550
4.	Belt Fastening Button CU21-0301-158001
5.	Rubber Belt CU21-0301-158000
6.	Master Carrier CU21-0401-010020
7.	Stopper CU21-0401-010010
8.	Runners CU21-0401-062001
9.	Ceiling Bracket CU21-0501-062001
10.	End Hook CU21-0201-062003



CONTROL OPTIONS





ALTERNATE OPTION



BRACKET OPTIONS



S-FOLD OPTION




COLOUR RANGE




SPECIFICATIONS

DEDUCTION

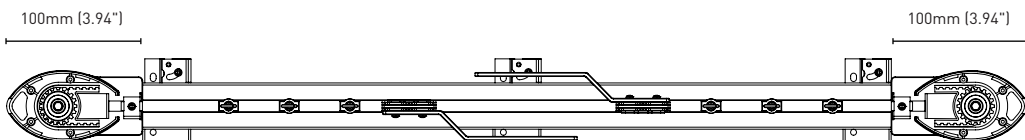


CONTROL SIDE	DRIVE SIDE	OVERALL DEDUCTION
100mm (3.94")	100mm (3.94")	200mm (7.88")

TRACK PROFILE & DIMENSIONS



90 DEG CURVED TRACK DIMENSIONS

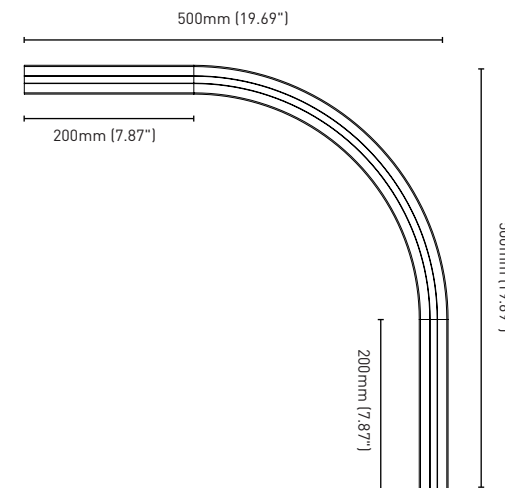


DRAPE MOTOR SPECIFICATIONS			
Code	MT01-2101-xxx001	MTACRFDR-50KG	MTACRFDR-50KGLC
Region	AU/EU	US	US
Power Cable Length	2500mm (8.2ft)	3000mm (9.84ft)	6000mm (19.69ft)
Supply Voltage	110-240V; 50-60Hz		
Capacity	1.2Nm @ 14cm/s		
Running Time	4 min		
Current	0.15 A		
Consumption	16 W		
Protection class	IP44		
Frequency	433.92 MHz		
Sound Level	52dB		
Weight	1.5 Kg (0.88 lbs)		
RF Modulation	FSK		
Limit Switch Type	Electronic		
Temp Working Range	0 °C to 60 °C		
Insulation Class	II		

STRAIGHT TRACK

ONE WAY



CENTRE CLOSE



CURVED TRACK

ONE WAY



CENTRE CLOSE



AUSTRALIA | EUROPE | USA

info@rolleaseacmeda.com | rolleaseacmeda.com

©Copyright 2018 Rollease Acmeda Group