# BRACKETS | DOUBLE

FEATURES & BENEFITS

- Combine sheer fabric and block-out fabric in one installation.
- Ultimate privacy while still allowing light into any given room.
- Easy-Lock assembly to simplify installation.
- Available in multiple configurations for every application.
- HD Adapter increases the standard bracket's strength for larger motors.
- Bracket covers offer a finished solution for Slim Profile double brackets.

MOUNTING SOLUTIONS

TOP   FACE   RECESS
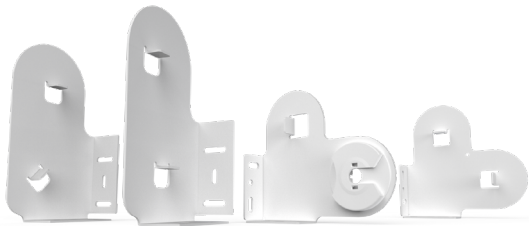
COLOUR RANGE

black
pure white
sandstone
silver grey

OPTIONS

HD ADAPTER

RB09 Direct with Chain Guide

IDLER   CONTROL

IDLER   CONTROL

HARDWARE
CONTROLS

BRACKETS
SLIM PROFILE
SQUARE-X
SLIMLINE-X
TUBES
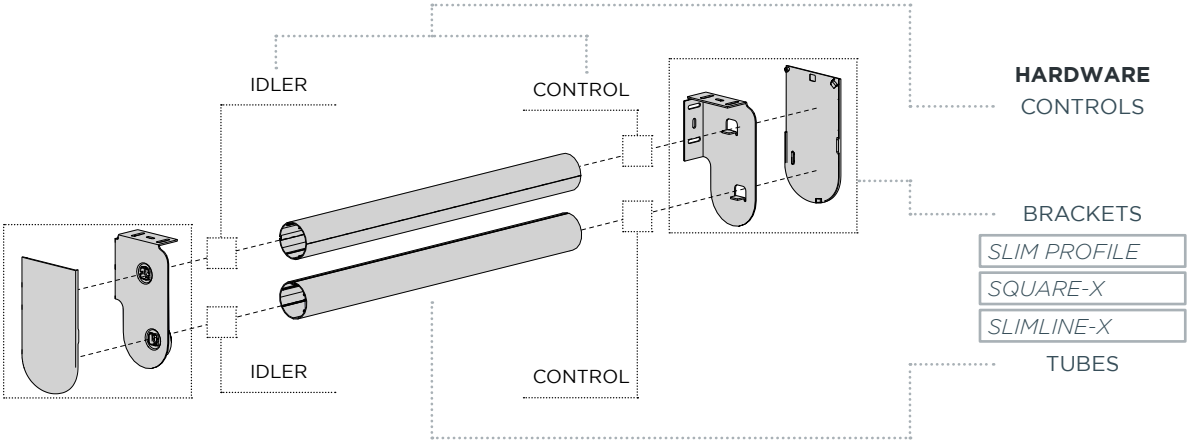
FABRIC ORIENTATION

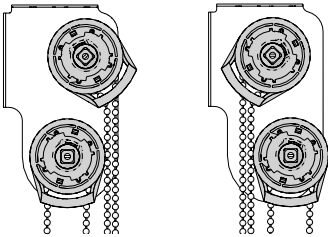| SLIM PROFILE | TOP-FRONT	SLIM PROFILE | TOP-BACK	SQUARE-X	SLIMLINE-X

TECHNICAL DATA

SLIM PROFILE WITH RB09: TOP FRONT   TOP BACK

INCREASED DOUBLE BRACKET CAPACITY WITH THE HD ADAPTER

The HD Adapter is required for all 3.0Nm and 6.0Nm motors.
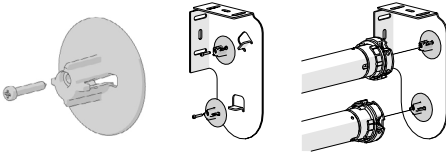
			MAX ROLL SIZE (x2)	BRACKET COVERS	WINDER		MOTOR	MOTOR & HD ADAPTER		IDLER		UPGRADE
					RB07/08	RB09	0.7, 1.1, 2.0Nm 5V	3.0Nm 12V	6.0Nm AC	RB07/08	RB09	EASY-LINK
SLIM PROFILE TOP FRONT		Top Front configured brackets use front over-rolled fabric to conceal both rolls. The Top Front chain control is installed on a 45° angle for improved operating experience.	70mm	✓	✓	✓	✓	✓	✓	✓	✓	✓
SLIM PROFILE TOP BACK		Slim profile bracket has both controls located on the same side to minimise footprint in living space. Top Back configured brackets have the back roll at the top for optimum light blocking.	70mm	✓	✓	✓	✓	✓	✓	✓	✓	✓
SQUARE-X		Square profile bracket with both tube controls located on the same bracket side.	70mm		✓	✓	✓	✓	✓	✓	✓	✓
SLIM-LINE-X		Square profile bracket with controls located on the opposite sides. Separating one chain control to each side simplifies operation for the user.	65mm		✓	✓	✓	✓	✓	✓	✓	

ROLLEASE ACMEDA.