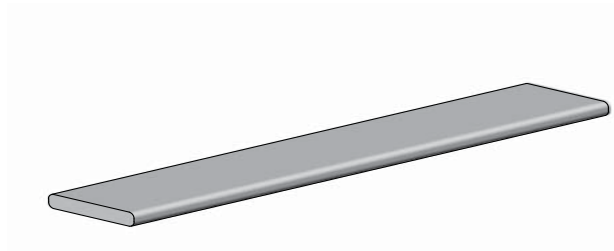


OVERVIEW

This rigid spline has been developed with a high grade compound able to withstand the rigours of high temperatures over extended periods of time. Furthermore an equally robust Multi-Purpose double sided tape may be added.

FEATURES & BENEFITS

- High Grade Polymer Compound - heat resistant to 100 degrees Celsius (212 Fahrenheit).
- Improved secure packaging.
- Acrylic Double Sided tape - heat resistant to 100 degrees Celsius (212 Fahrenheit).
- Multi-Purpose tape - compatible with a wide range of fabrics.

**USE WITH**

- 9mm **MINI** Bottom Rail
SYS40 | 39SPLINE Aluminium Tube
SYS40 | 40HD Aluminium Tube
SYS45 | 49HD Aluminium Tube
SYS60 | 60STD Aluminium Tube
SYS60 | 80HD Aluminium Tube
- 10mm **OVAL** Bottom Rail
FLAT Bottom Rail
W9 Weight Bar
- 15mm **ROUND** Bottom Rail
F4115 Heavy Duty Weight Bar

ACM Flat Spline

100 Lm Roll

9mm	CODE:	RB92-0901-001100
10mm	CODE:	RB92-1001-001100
15mm	CODE:	RB92-1501-001100

75 Lm Roll

with **Double Sided Multi-Purpose HR Tape**


9mm	CODE:	RB92-0902-001075
10mm	CODE:	RB92-1002-001075
15mm	CODE:	RB92-1502-001075

75 Lm Roll

with **Double Sided Multi-Purpose HR Tape BOTH SIDES**

9mm	CODE:	RB92-0903-001075
10mm	CODE:	RB92-1003-001075
15mm	CODE:	RB92-1503-001075

PACK: 1 | 10 Rolls

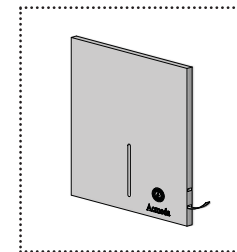

PACKAGED SPLINE