

AUTOMATE™ | CL 0.6 Motor

Part #: MTDCRF-CL-0.6-50

Description: Cord Lift 0.6 Nm Motor


FEATURES

- Electronic Limit
- Levelling Control
- Simple limit setting and adjustment
- Favorite position
- 3 operational speed settings available
- 2-way RF communication
- New ARC™ protocol for simple programming
- Battery & wired DC power Options

TECHNOLOGIES



DIMENSIONS

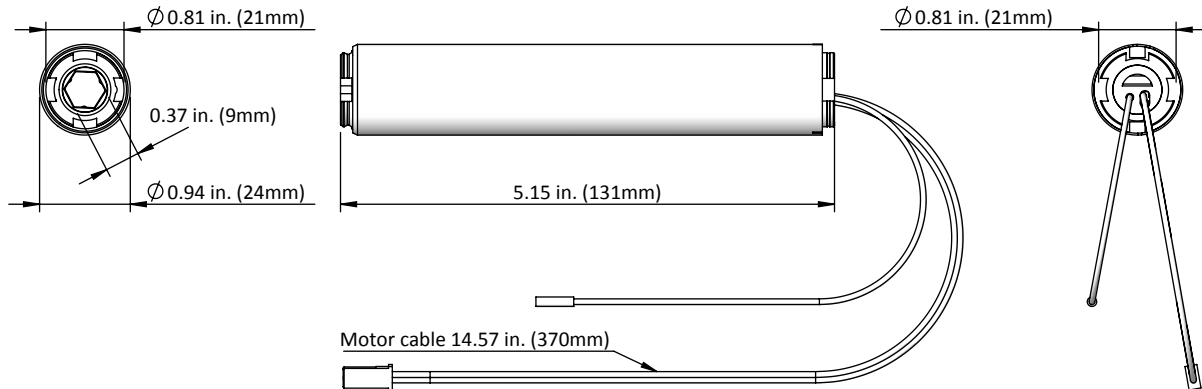

SPECIFICATIONS

Voltage	12 V DC	IP Rating	IP44
Torque	0.6 Nm	Limit Switch Type	Electronic
Max Run Time	10 Min	Amps	0.83 A
Speed	50 RPM (Adjustable to 42 or 34)	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	III
RF Modulation	FSK	Sound Level	~48DB

PQRG_MITDCRF-CL-0.6-50_v1.2_2017 NOV

Leading innovator of precision hardware and automated shade solutions.
USA | AUSTRALIA | EUROPE rolleasemed.com

© 2017 Rollease Acmeda Group



APPLICATIONS



CELLULAR
SHADES



ROMAN
SHADE

- LIFT FOR MINI BLINDS

COMPATIBLE SYSTEMS

- Turnils 1
- Comfortex
- Blinds to Go Smartlift
- HT Window Fashions

ACCESSORIES

POWER SOLUTIONS

Descr: AA Battery Lithium 8 Pak
Part#: MTBWAND18-25

Descr: Rchrgbl Btry Pak- 28mm DCBRF
(No Batt) Mtr 2600mAh
Part #: MT-BATT-AA-X8

REMOTES & SWITCHES

Descr: Paradigm 1CH ARC™ Remote
Part #: MTRF-REM-1

Descr: Paradigm 15CH ARC™ Remote
Part #: MTRF-REM-15C

AUTOMATION DEVICES

Descr: Sun Sensor
Part #: MTRF-SUNSENS

Descr: ARC™ "Pulse" Wi-Fi to 433
2 way RF Bridge Kit
Part #: EU Version: MTRF-PULSE-EU
UK Version: MT02-0401-050010

ADAPTERS

Descr: Motor Adapt Cord Lift - Acmeda SS38
Headrail - 100qty
Part # MTAD-CLHR-SS38

Descr: 5mm Square Shaft Adapter
Part # MTAD-CLSA-5MMSQ
(Compatible with SS38)



Leading innovator of precision hardware and automated shade solutions.
USA | AUSTRALIA | EUROPE rolleseeacmeda.com

