

AUTOMATE | Li-ion Q2.0


Part #: MTDCBRFQ28-2.0

Description: DC Tubular motor with in-built Lithium-ion rechargeable battery.


FEATURES

- Levelling control
- Simple limit setting and adjustment
- Favourite position
- 3 operational speed settings available
- 2 way RF communication
- Rechargeable built in Li-ion battery
- New ARC protocol for simple programming

TECHNOLOGIES

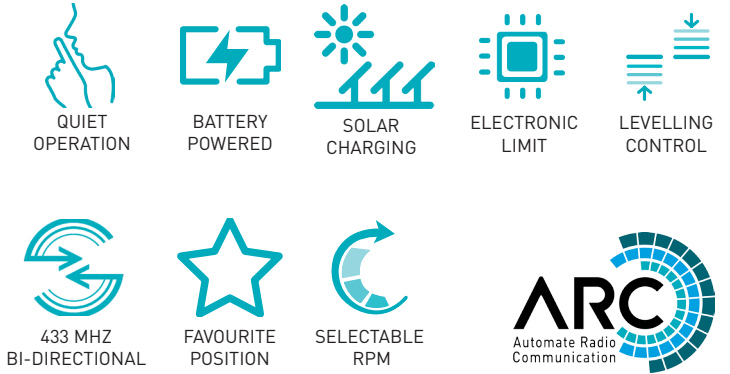

DIMENSIONS

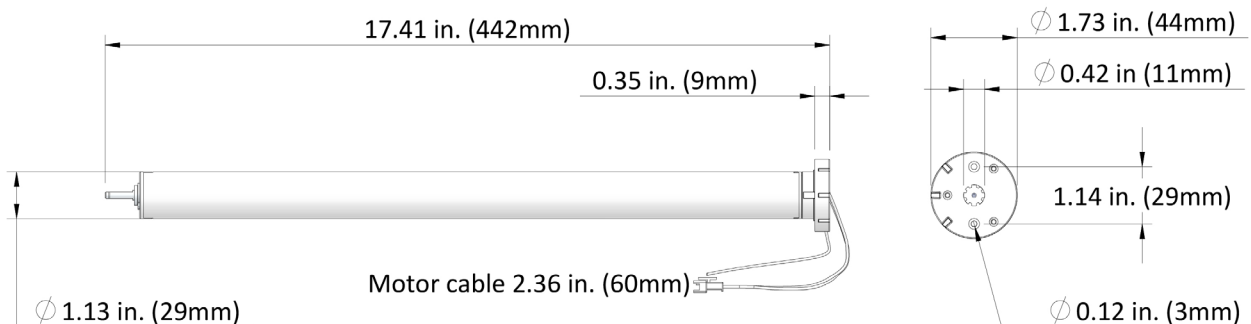

SPECIFICATIONS

Voltage	12	IP Rating	IP44
Torque	2Nm	Limit Switch Type	Electronic
Max Run Time	10 Min	Amps	1.25A
Speed	28 RPM (Adjustable to 24 or 20)	Battery Size/Type	2600mAH
Radio Frequency	433.92 MHz	Temp Working Range	0°C to 60°C (32°F to 140°F)
RF Modulation	FSK	Sound Level	-44DB

APPLICATIONS



ROLLER
SHADE

COMPATIBLE SYSTEMS

- S45 Roller Shades
- Skyline SL20 / 50mm tube

ACCESSORIES

CHARGING SOLUTIONS	12V Li-ion Charger - EU Part #: MTDCB-CHARGE-EU
EXTENSION CABLES	12V Li-ion Charger Cable ext 96"/2440mm Part #: MTDCB-CBLXT96
	12V Li-ion Charger Cable ext 48"/1220mm Part #: MTDCB-CBLXT48
	12V Li-ion Charger ext 6"/155mm Part #: MTDCB-CBLXT6
CONTROLS	Paradigm 1CH ARC Remote Part #: MTRF-REM-1
	Paradigm 15CH ARC Remote Part #: MTRF-REM-15
	Interior Sun Sensor Part #: MTRF-SUNSENS
	Automate Pulse Part #: MTRF-PULSE-EU



Leading innovator of precision hardware and automated shade solutions.
AUSTRALIA | USA | EUROPE rolleseeacmeda.com

© 2016 Rollease Acmeda Group



**ROLLEASE
ACMEDA**
PRECISION IN MOTION