

OVERVIEW: RB08 MKII CHAIN CONTROL S40/ S45 SYSTEM

The progression to the RB08 MKII Chain Control System is due to the implementation of several advancements made in Acmeda's development program, improving the overall performance, function and appearance of the previous design/model.

AESTHETIC FEATURES


- Smooth / clean aesthetical appearance.
- New ergonomic bracket design with square edge profile.

ASSEMBLY / INSTALLATION BENEFITS

- Easy-Lock effortless installation.
- 7mm adjustable Idler Extension.
- Improved installation with self locating grooves.

FUNCTIONAL BENEFITS

- Improved chain retention system, securing chain within mechanism during operation.

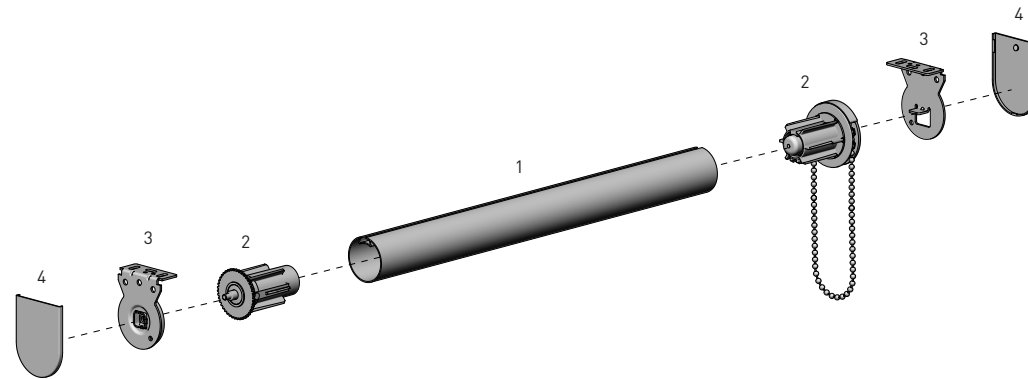

SYSTEM INDEX

1	Aluminium Tube - S40/S45
	RB91-02##-000##0
2	Easy-Lock MKII Chain Winder & Extended Idler
	RB08-4002-xxx000 - S40
	RB08-4502-xxx000 - S45
3	Easy-Lock Installation Bracket
	RB08-8351-xxx0## - VX [40 & 55mm proj.]
	RB08-8314-xxx0## - AX [40 & 55mm proj.]
4	Bracket Cover Cap
	RB08-4151-xxx0## - VX [40 & 55mm proj.]
	RB08-4141-xxx0## - AX [40 & 55mm proj.]


xxx= colour ## = size

COLOUR RANGE


pure white 069	sandstone 269	barley 283	silver grey 338	black 050

SYSTEM OPTIONS

MOUNTING RAIL




COMBO BRACKETS



RETRO-FIT BOOSTER




FIXED GUIDE WINDER SETS




ADD ON SYSTEMS


ROUND BOX 90

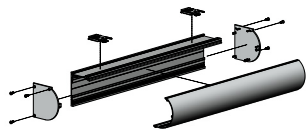


FRS100 VALANCE

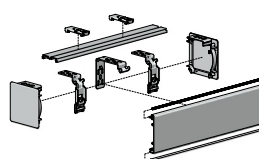

EASY-LINK S40 / S45



SQUARE BOX 100

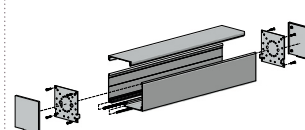


INTERNAL WIRE GUIDE





SPECIFICATIONS: RB08 MKII CHAIN CONTROL S40/ S45 SYSTEM

MAX ROLL

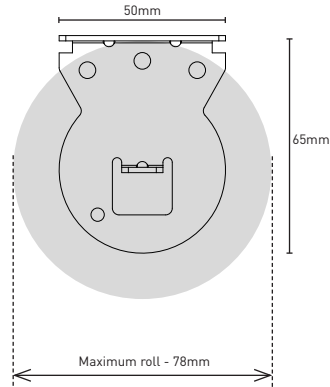


DEDUCTIONS

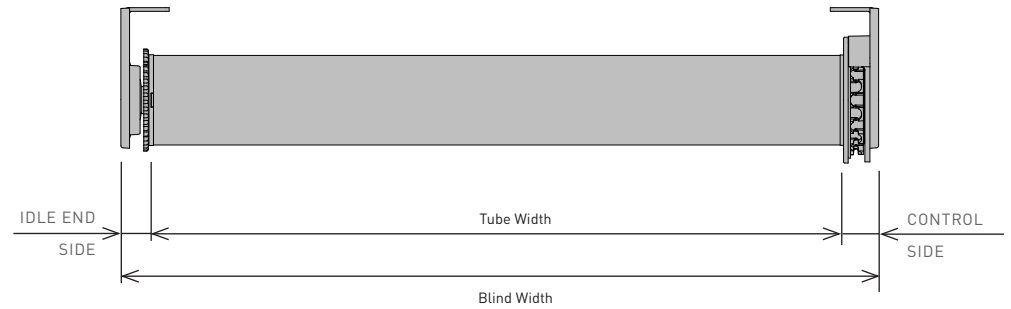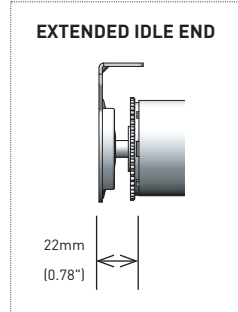

	IDLE END SIDE	CONTROL SIDE	OVERALL DEDUCTION
VX/AX BRACKETS - with covers	15mm [0.59"]	17mm [0.66"]	32mm [1.25"]
VX/AX BRACKETS - withOUT covers	14mm [0.55"]	15mm [0.59"]	29mm [1.14"]

SYSTEM CAPACITY

RB08 | Minimum Blind Width: 150mm / 6inches
 RB08 + RETROFIT | Minimum Blind Width: 750mm / 30inches

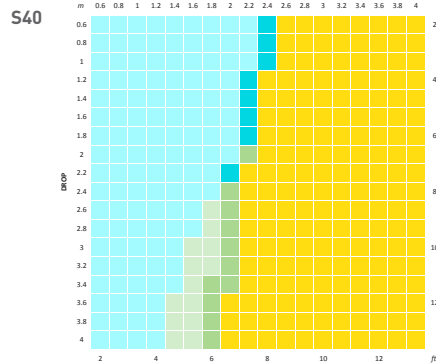


CONTROL	LEGEND	DESCRIPTION	EASY-LINK REQ.
RB08	[Light Blue]	S40 HD / STD + 39 SPLINE	[Yellow]
	[Dark Blue]	S40 HD	[Yellow]
RB08 + RETROFIT	[Light Green]	S40 HD / STD +39 SPLINE	[Yellow]
	[Dark Green]	S40 HD	[Yellow]

Parameters
 Fabric Density: 420gsm
 Fabric Thickness: 0.6mm
 Weight Bar: D30 Bottom Rail

*Refer to S40/45 Easy-Link QRG for further details


Maximum Hold Weights
 S40 | 39 Spline Tube: 5.2kg / 11pounds (RB08), 14.6kg / 32pounds (RB08 + Booster)
 S40 STD Tube: 5.2kg / 11pounds (RB08), 14.6kg / 32pounds (RB08 + Booster)
 S40 HD Tube: 5.1kg / 11pounds (RB08), 14.4kg / 32pounds (RB08 + Booster)

ALUMINIUM TUBES




S40 | 39SPLINE
 Aluminium Tube

CODE: RB91-0237-000480
 with D/S tape RB91-6237-000480
 O.D: 39mm
 Length: 4.8 metres



S40 | 39KEYWAY
 Aluminium Tube


CODE: RB91-0238-000550
 with D/S tape RB91-6238-000550
 O.D: 39mm
 Length: 5.5 metres



S40 | 40 HEAVY DUTY
 Aluminium Tube

CODE: RB91-0240-000550
 O.D: 40mm
 Length: 5.5 metres

S45

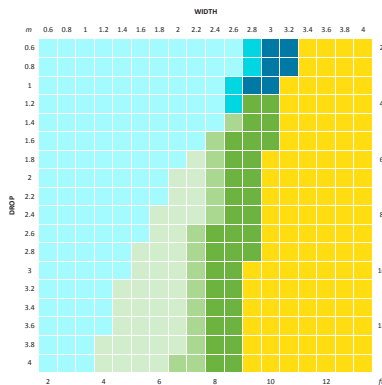


RB08 | Minimum Blind Width: 150mm / 6inches
 RB08 + RETROFIT | Minimum Blind Width: 750mm / 30inches

CONTROL	LEGEND	DESCRIPTION	EASY-LINK REQ.
RB08	[Light Blue]	S45 HD / STD / LT	[Yellow]
	[Dark Blue]	S45 HD / STD	[Yellow]
	[Medium Blue]	S45 HD	[Yellow]
RB08 + RETROFIT	[Light Green]	S45 HD / STD / LT	[Yellow]
	[Dark Green]	S45 HD / STD	[Yellow]
	[Medium Green]	S45 HD	[Yellow]

Parameters
 Fabric Density: 420gsm
 Fabric Thickness: 0.6mm
 Weight Bar: D30 Bottom Rail


*Refer to S40/45 Easy-Link QRG for further details

Maximum Hold Weights
 S45 Light Tube: 4.7kg / 10 pounds (RB08), 13.4kg / 30 pounds (RB08 + Booster)
 S45 STD Tube: 4.6kg / 10 pounds (RB08), 13.0kg / 30 pounds (RB08 + Booster)
 S45 HD Tube: 4.2kg / 9 pounds (RB08), 11.8kg / 26 pounds (RB08 + Booster)




S45 LIGHT
 T-Spline Tube

CODE: RB93-0443-000580
 with D/S tape RB93-6443-000580
 O.D: 43mm
 Length: 5.8 metres



S45 STANDARD
 T-Spline Tube

CODE: RB93-0444-000580
 with D/S tape RB93-6444-000580
 O.D: 44mm
 Length: 5.8 metres



S45 HEAVY DUTY
 T-Spline Tube

CODE: RB93-0449-000580
 with D/S tape RB93-6449-000580
 O.D: 49mm
 Length: 5.8 metres