$\text{ANDTOMATE}_{\scriptscriptstyle{\mathsf{TM}}}$

ACRF 15

Powerful motor. Levelling control. Limit setting.

The AC motor can provide continuous power and is the ideal solution when establishing wiring during a renovation or new build.



BI-DIRECTIONAL COMMUNICATION

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade positioning via the Automate Pulse 2 app.



SIMPLIFIED SETUP

Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.




FAVORITE POSITIONING

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite".



PRECISE LIMIT ADJUSTMENT

Incremental steps during limit setting allows for precise positioning of the shade

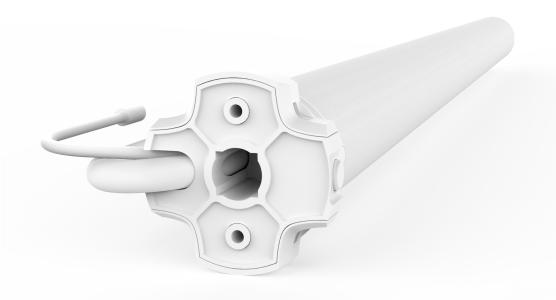






PRODUCT SPECIFICATIONS

Part #: MTACRF45-15

AC Tubular motor with RF control.

Voltage	120V A/C	Limit Switch Type	Electronic
Torque	15Nm	Current	1.73A
Max Run Time	4 min	Temp Working Range	32°F to 140°F (0°C to 60°C)
Speed	32 RPM	Insulation Class	III
Radio Frequency	433.92 MHz	Sound Level	~53 dB
RF Modulation	FSK	Power	208W
IP Rating	IP44		

DIMENSIONS

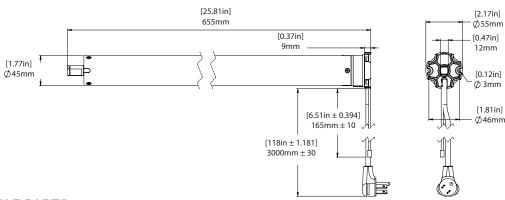

COMPATIBLE PARTS

Tubes







2" Smooth Tube	MTCRDR-45-2SW	
2-1/2" Tube	MTCRDR-45-2.5	
3-1/4"	MTCRDR-45-3.25	
S60	RB56-0336-050502	
\$80	RB56-0338-050502	

Adaptors



- MTAD-45-SL
- MTAD-45-RS

COMPATIBLE SYSTEMS

• Skyline Roller Shades

• 5x5

· Silent Pin

· S60

COMPATIBLE ACCESSORIES (refer to catalog for full item listings)

Controllers





Pulse 2 HUB

Push 5 remotes