$\text{ANDTOMATE}_{\scriptscriptstyle{\mathsf{TM}}}$

ACRF Q6

Powerful motor. Levelling control. Limit setting.

The AC motor can provide continuous power and is the ideal solution when establishing wiring during a renovation or new build.



BI-DIRECTIONAL COMMUNICATION

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade postioning via the Automate Pulse 2 app.



SIMPLIFIED SETUP

Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.




FAVORITE POSITIONING

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite".



PRECISE LIMIT ADJUSTMENT

Incremental steps during limit setting allows for precise positioning of the shade

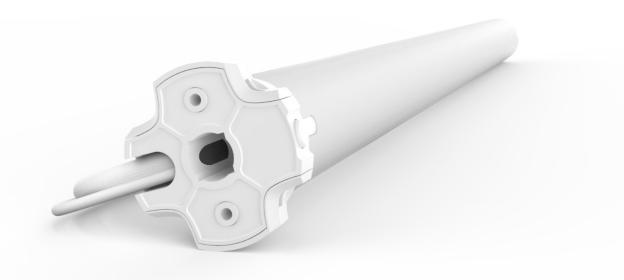










PRODUCT SPECIFICATIONS

Part #: MTACQRF35 - 6 Quiet AC Tubular motor with RF control.

Voltage	120V AC	Limit Switch Type	Electronic
Torque	6.0Nm	Current	0.85A
Max Run Time	4 min	Temp Working Range	32°F to 140°F (0°C to 60°C)
Speed	24 RPM	Insulation Class	III
Radio Frequency	433.92 MHz	Sound Level	~42 dB
RF Modulation	FSK	Power	102W
IP Rating	IP44		

DIMENSIONS

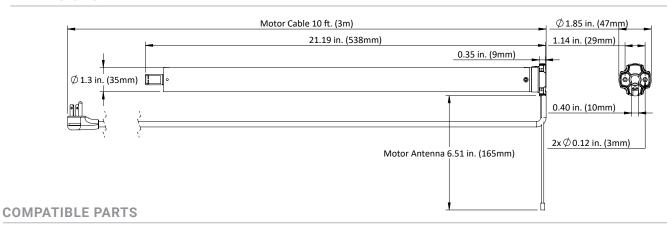

Tubes





2" Ribbed Tube	MTCRDR-35-2	
S45 - Light		
S45 - Std	MTCRDR-35-S45	
S45 - HD		
40mm Octagonal (3rd party product)	VB40-0306-050408 & MTCR-35-2-0CT	

Adaptors



- MTAD-252835-SL
- MTAD-25-28-SLV2W
- RB40-1402-069400

COMPATIBLE SYSTEMS

- Skyline Roller Shades
- · S45 Roller Shades

COMPATIBLE ACCESSORIES (refer to catalog for full item listings)

Controllers





Pulse 2 HUB

Push 5 remotes