

Pulse 2

The Pulse 2 connects to home networks to unlock the luxury of automated shade control. Experience customization with scene and timer options as well as voice control via Google Assistant, Amazon Alexa and Apple HomeKit.



VOICE CONTROL

Intuitively control Automate shades with simple voice commands through Google Assistant, Amazon Alexa or Apple HomeKit.



AUTOMATE APP CONTROL

Control shades remotely, whether home or away. The Automate app is available for all Android phones, tablets and iOS devices, including Apple watches & iPads.



SUNRISE & SUNSET DETECTION

Utilizing time zone and location, the Pulse 2 can automatically raise or lower Automate shades according to the position of the sun.



LIVE FEEDBACK

ARC enables live communication between the hub and motors. Check motor battery levels and shade positions through the app or smart assistants



DISTINCT DESIGN

Designed in California, the Pulse 2 embraces elements from modern architecture to ensure it complements the interior of any home.



PERSONALIZED EXPERIENCE

Create custom rooms, scenes, routines and timers to enable efficient or automatic shade control based on time, weather or schedule.



HIGH-SPEED CONNECTION

Built-in Wi-Fi or the option of Ethernet connection, ensures the Pulse 2 can connect to any home network and provide swift, wireless control of Automate shades.



3 STEP SET UP


No need to complicate things.

- 1. Power on.
- 2. Download the App.
- 3. Connect & Enjoy.







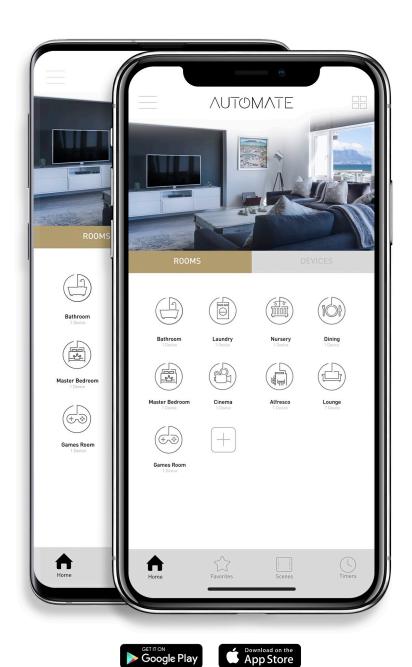

ROOMS

Group Automate shades by room and conveniently control them accordingly.







SCENES

Personalize shade control and organize how your shades operate by specific daily events.







TIMERS

Set and forget. Lower, raise and activate shade scenes automatically at the optimal time.







MULTIPLE SHADE TYPES

Awnings, Roller shades, External shades, Cellular .. Control every shade type from one screen.









INTEGRATIONS
























PRODUCT SPECIFICATIONS

Part #: MT02-0401-067001 Automate Pulse 2 HUB

Input Voltage	5V	Apple IOS Version	Needs to be 11.3 or greater
Input Power	1000mA	Android Version	Needs to be 6.0 or greater
Wi-Fi network	2.4Ghz only	Devices	Compatible with Smart Phones, Tablets and Smart Watches
Shade Control Frequency	433.92 MHz	Accounts per Hub	5
Range	~60 feet (no obstructions)	Locations per Hub	5
Protection Class	IP20	Devices per Hub	30
Operation Temperature	32°F to 140°F (0°C to 60°C)	Hubs per Location	5
Connection	LAN (CAT 5) and Wi-Fi	Rooms per location	20
IOT Integration	Apple HomeKit, Amazon Alexa, Google Assistant, IFTTT, SmartThings	Scenes per Location	20
Third Party Device Integration	Control4, ELAN, HomeSeer, Crestron, AMX, Savant, RTI	Timers per location	20
Ethernet Cable	39 Inches	USB Cable Length	31 Inches

DIMENSIONS

112mm [4.41"] 112mm [4.41"]

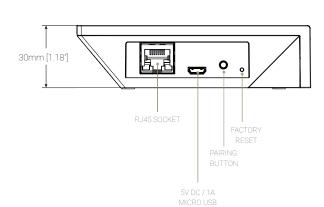

POWER ADAPTORS

