$\text{ANDTOMATE}_{\scriptscriptstyle{\mathsf{TM}}}$

CL 0.6 Cord Lift

Cord lift technology. Low voltage. 3 speed settings. The CL motor can provide continuous power and its simplified wiring solution is directly compatible with cellular shades.



BIDIRECTIONAL COMMUNICATION

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade positioning via the Automate Pulse 2 app.



INTERCHANGEABLE POWER SOURCE

Choose to have your shades hard wired for continuous power or opt for a wire-free setup – choose from a rechargeable battery pack or a tube that holds AA batteries.



FAVORITE POSITIONING

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite."




SIMPLIFIED SETUP

Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.



PRECISE LIMIT ADJUSTMENT

Incremental steps during limit setting allows for precise positioning of the shade.

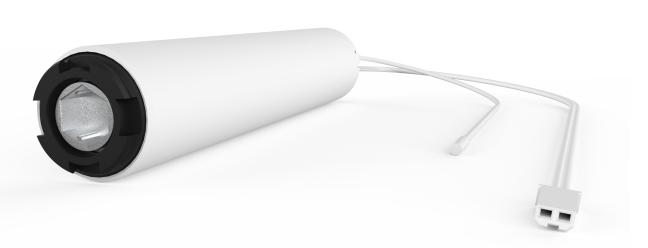








PRODUCT SPECIFICATIONS

Part #: MTDCRF-CL-0.6-50 Cord Lift 0.6 Nm Motor

Voltage	12V DC	Limit Switch Type	Electronic
Torque	0.6 Nm	Current	1.0 A
Max Run Time	12 min	Battery Size/Type	External Battery Pack
Speed	50 RPM (Adjustable to 42 or 34)	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	I.CL.B
RF Modulation	FSK	Sound Level	48dB
IP Rating	IP44	Power	12W

DIMENSIONS

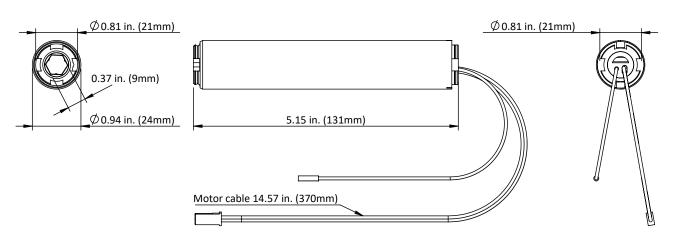

COMPATIBLE PARTS

Systems







Shaft Adaptors



BTG Headrail	MTAD-CLHR-BTGC	MTAD-CLSA-4MMSQ
Turnils Headrail	MTAD-CLHR-TUR	MTAD-CLSA-V
SS38 Headrail	MTAD-CLHRSS38KT	-
-	MTAD-CLHR_US-ROM	MTAD-CLSA-D
-	-	MTAD-CLSA-5mmSQ

COMPATIBLE PRODUCTS (refer to catalog for full item listings)

Controllers





Pulse HUB & App



Power Options





Power Supply

Battery Pack

