
ZIPSCREEN

FEATURES & BENEFITS

- Ideal solution for enclosing Pergolas, Al Fresco & outdoor entertaining areas offering privacy and protection from the sun, wind, rain and insects in a clean, architectural look.
- Custom designed system can be made in widths of up to 7 metres (22.9ft) or drops up to 5 metres (16.4ft), offering you an external solution to fit almost any area.
- Wide range of standard colours and ability to custom powder-coat extrusions to suit any external environment.
- Streamlined-design offering multiple control options provides ease of assembly and installation in exterior applications.
- Motorized versions are provided with impact detection functionality and can be paired with our Sun & Wind sensor to provide an intelligent and reliable outdoor shading system.
- Single-piece F56 & F72 weight bars provide ultimate rigidity & outstanding performance over large openings.





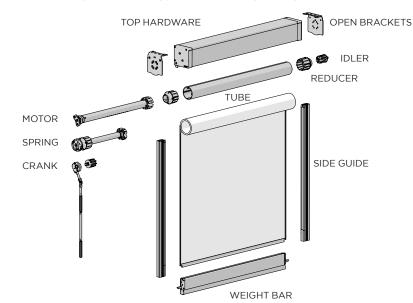

HARDWARE

OPEN BRACKETS

SQUARE

EXTREME

BOX

BOX 120

BOX 190

CONTROLS

MOTOR

SPRING

CRANK

TUBES

78mm

110/130/160mm **WEIGHT BARS**

F56

F72

KEY SYSTEM FEATURES

PREMIUM CONTROL OPTIONS





Motorized Controls

Powered by Automate™

Zipscreen shades can be

into home automation platforms to

provide the ultimate outdoor living

experience.

remote-controlled or integrated









Manual Controls

Crank controls are perfect for areas with high ceilings while Spring controls provides the ability to seamlessly move the shade up and down to the desired position.

THE ZIPSCREEN DIFFERENCE









Adjustable side channels enable easy installation in out-of-square openings, up to 20mm (3/4") per side

SECURE ASSEMBLY & INSTALLATION



Reducer screws into tube for secure, reliable connection.



Snap-lock features provide secure connection and fast assembly.

CLEAN, SMOOTH LOOK WITH ULTRA-LOCK



Exclusive to the Zipscreen system, the patented Ultra-Lock hidden locking mechanism integrates into the side channels. Durable, reliable and completely unobtrusive, Ultra-Lock secures and tensions the shade for a smooth, taut fabric finish.

SYSTEM OPTIONS



WIRE GUIDE



STRAIGHT DROP



PIVOT ARM



OPEN BRACKETS



L-Fixing Rail (Outside Mount)

ZIPSCREEN


MINIMUM WIDTH

	CRANK	500mm [19-11/16"]					
MOTOR	15 Nm (AU)	770mm [30-5/16"]					
	15 Nm (US)	805mm [31-11/16"]					
Σ	10 Nm (US)	905mm [35-5/8"]					
	COMPACT	550mm [21-5/8"]					
NG	LIGHT	730mm [28-3/4"]					
	STANDARD	930mm [36-5/8"]					
SPRING	HEAVY	1080mm [42-1/2"]					
	EXTRA HEAVY	1290mm [50-13/16"]					
	ULTRA HEAVY	1460mm [57-1/2"]					

MAX ROLL

BOX 120	Ø110mm [4-5/16"]
BOX 190	Ø156mm [6-1/8"]
OPEN SQUARE	Ø130mm [5-1/8"]
OPEN EXTREME	Ø170mm [6-11/16"]

SYSTEM CAPACITY



SYSTEM	BRACKETS						
Zipscreen Wire Guide	Box 120 or						
Straight Drop Pivot Arm	Open Brackets						
Zipscreen	Box 120						
Wire Guide Straight Drop	Box 120						
Zipscreen	Open Brackets						
Zipscreen	Box 190						
Outside Product Specifications							

TECHNICAL DATA

	TOP HARDWARE			TUBES				CONTROLS			W.BARS			
SYSTEM	BOX 120	BOX 190	OPEN	78MM	110MM	130MM	160MM	SPRING	CRANK	MOTOR	F56	F72	PIVOT	
ZIPSCREEN	V	V	V	V	√	V		V	J	√	V	J		
WIRE GUIDE	J	J	J	J	√	J	J		√	✓	V	V		
STRAIGHT DROP	J	J	J	J	J	J	J		V	V	J	V		
PIVOT ARM	✓		J	J					✓	1			√	

		78MM		\$100				SYSTEM OF	WIRE GUIDE OPTIONS			
	BOX 120 OPEN		BOX 190 OPEN				F56	F72		3.2MM	4MM	
BRACKETS	0	& & & & & & & & & & & & & & & & & & &	6 6 6				WEIGHT BARS			WIRE		9
	78MM STD/HD		78MM STEEL	S100	110MM	S100 130MM		ULTRA-LOCK	BOLT LOCK		UNIVERSA	L BRACKET
TUBES	9								D	3.2MM BRACK	0	
	CRANK	SPRIN	G MOTOR		МОТ	OR	ADDONS	HANDLES	PULL STICK	TS	FLOOR MOUNT	FACE FIX
CONTROLS									4MM BRACKET	(HE)		