

ROLLEASE ACMEDA
PRECISION IN MOTION

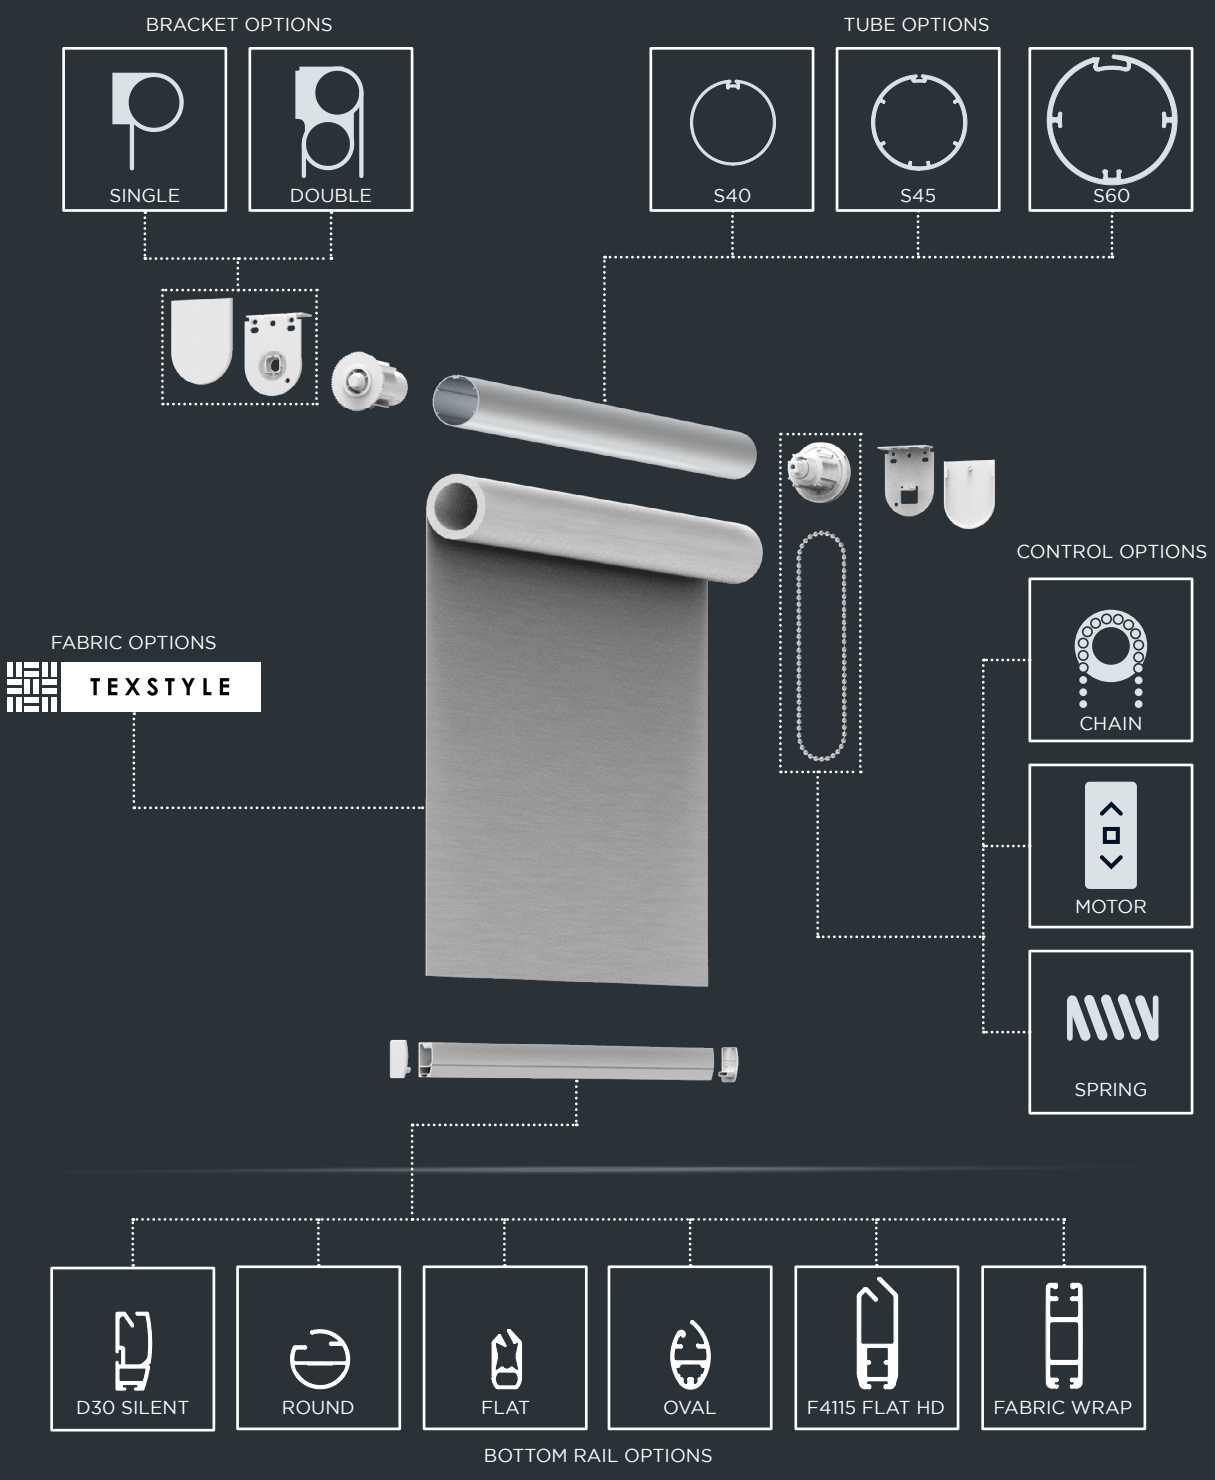

MEDIUM SYSTEM UPGRADES & OPTIONS:

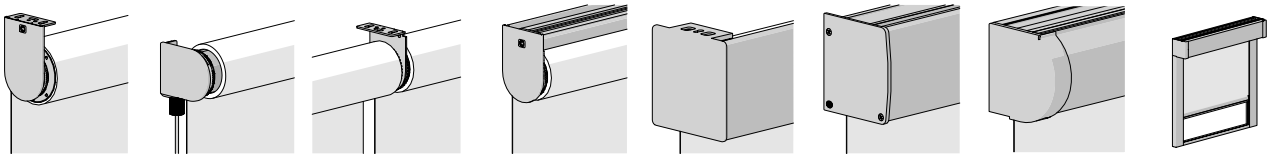

CONTENTS

CONTROL OPTIONS

CHAIN

03 RB09 CHAIN WINDER
05 RB07/RB08 CHAIN WINDER
07 EASY-LIFT CHAIN BOOSTER
09 CHAINS & ACCESSORIES
10 CHAINS & CHILD SAFETY



- Patent protected Easy-Lock Idler with industry leading onsite adjustment.
- Optional Spring Booster decreases the user effort by up to 60%.
- Child Safe accessories available.

MOTOR

11 MOTORS | SUMMARY
12 MOTORS | CONTROLLERS
13 MOTORS | BATTERY
15 MOTORS | DC
17 MOTORS | AC



- Smart Home Automation and voice control available with the Pulse App.
- Multiple power-source configurations suitable for Commercial or Residential use.
- Wide range of Remotes & Accessories available.
- Child Safe shade control & cord-free system solution.

SPRING

19 EASY SPRING AIR



- A child-safe chain & cord-free system solution.
- Balanced system with adjustable springs.
- Optional pull stick for hard-to-reach installations.

HARDWARE

21 ALUMINIUM TUBES



- Extrusions available for all shade sizes.

22 BRACKETS | SINGLE



- Easy-Lock bracket technology simplifys the installation process.
- Compatible with all system upgrades & options.

23 BRACKETS | DOUBLE



- Combine blockout and light filtering fabrics in one installation.
- Uses the same Easy-Lock bracket technology as single brackets.


24 BOTTOM RAILS



- Multiple sizes and styles to suit all shade solutions.
- Add-ons available to simplifies assembly and optimise performance.


SYSTEM UPGRADES & OPTIONS

26 S45 TO S60 ADAPTOR




- Utilise S45 hardware with S60 tube to improve shade performance.
- LX 55mm Brackets offer a larger maximum roll diameter with a slimmer aesthetic.

27 INTERNAL WIRE GUIDE




- Secure guide, aiding & controlling unwanted shade movement.

28 EASY-LINK




- Link multiple shades together while achieving a minimal light gap.
- Control multiple shades with one control unit OR use a dual control set-up.

29 MOUNTING RAIL




- Solution for off-site assembly, achieving quicker installation times.

30 FRS VALANCE




- Decorative partial fascia to conceal the shade hardware.
- Option to wrap the extrusion in the same fabric as the shade.
- Extrusion is available in multiple sizes to suit medium to large fabric rolls.

31 PELMET 95




- Decorative partial fascia to conceal the shade hardware.
- Option to wrap the extrusion in the same fabric as the shade.

32 CASSETTE FASCIA 90



- Premium decorative cover protects from dust.
- Available in Round or Square profiles.

33 CF EDGE



- Edge is a light blockout upgrade to CF90

RB09 CHAIN WINDER

FEATURES & BENEFITS

- Patent protected snap-lock chain assembly to reduce fabrication time by up to 75%.
- Patent protected Easy-Lock Idler with industry leading on-site adjustment.
- Easy Lift Spring Booster achieves a lighter lifting solution, can also be retrofit on site.
- Heavy Duty bracket adaptor available for commercial use.
- Premium component design ensure a smooth and easy shade solution in a high polish finish.
- Chain Guide is designed for optimal double bracket user experience and the Direct Chain Guide can be installed in fixed or swivel configurations.
- RB09 Geared chain winder provides a cost-effective solution to reduce user effort by up to 40% (shade is lighter to lift).



COLOUR RANGE

- black
- pure white
- sandstone
- silver grey

WEB PAGE LINK


HARDWARE

10 YEAR WARRANTY

RB09 CHAIN WINDER

OPTIONS

- *DIRECT*
- *GEARED*

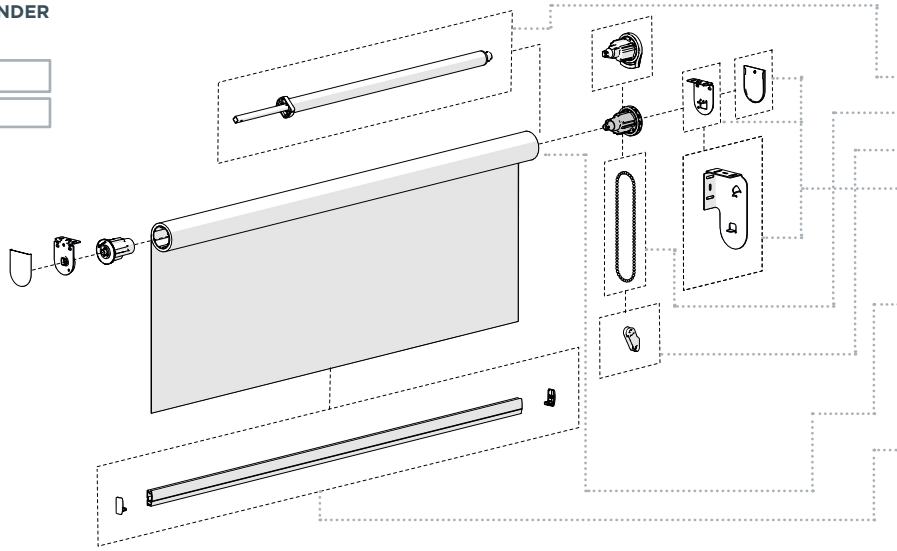

HARDWARE

CONTROLS

- *BOOSTER*
- *CHAIN*
- *TENSIONER*

BRACKETS

- *SINGLE | LX*
- *DOUBLE*

TUBES


- *S45 SERIES*
- *S60 SERIES*

BOTTOM RAILS

- *REFER TO PAGE*

KEY SYSTEM FEATURES


SNAP-LOCK CHAIN ASSEMBLY

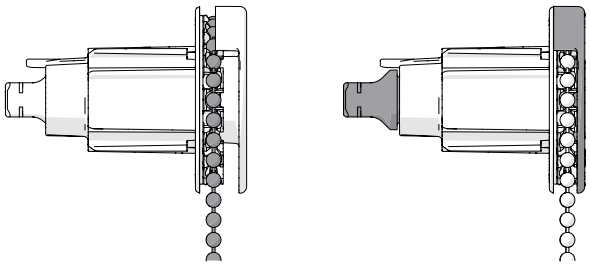

1. Add Chain.


2. Push Cover In.

RB09 DIRECT | FIXED OR SWIVEL OPTIONS

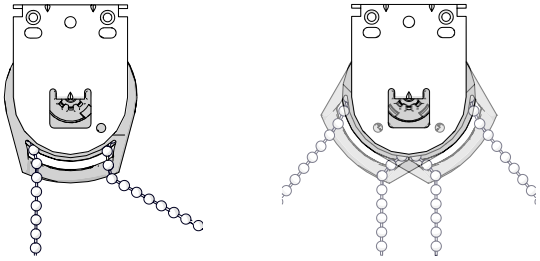


Swivel is ideal for installations above furniture & appliances.

10mm INSTALLATION ADJUSTMENT

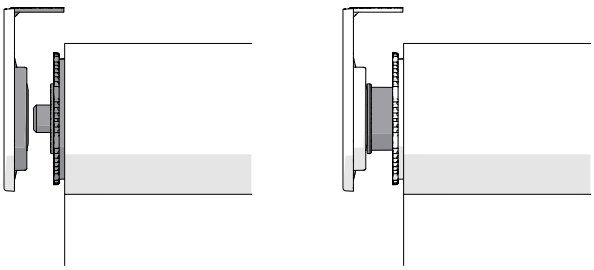


Rotate disk clockwise to extend the pin in 1mm increments.

RB09 GEARED | ECONOMICAL LIGHTER LIFT SOLUTION

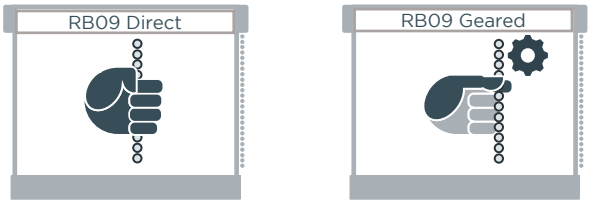

Cost effective solution to reduce user effort by up to 40%.

MEDIUM SYSTEM UPGRADES & OPTIONS:

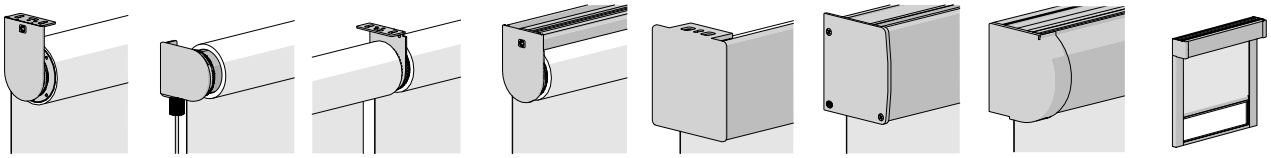


S45 TO S60 | WIRE GUIDE | EASY-LINK | MOUNTING RAIL | FRS VALANCE | P95 PELMET | CF90 | CF EDGE

ROLLEASE ACMEDA

RB09 SPECIFICATIONS

TUBE CAPACITY

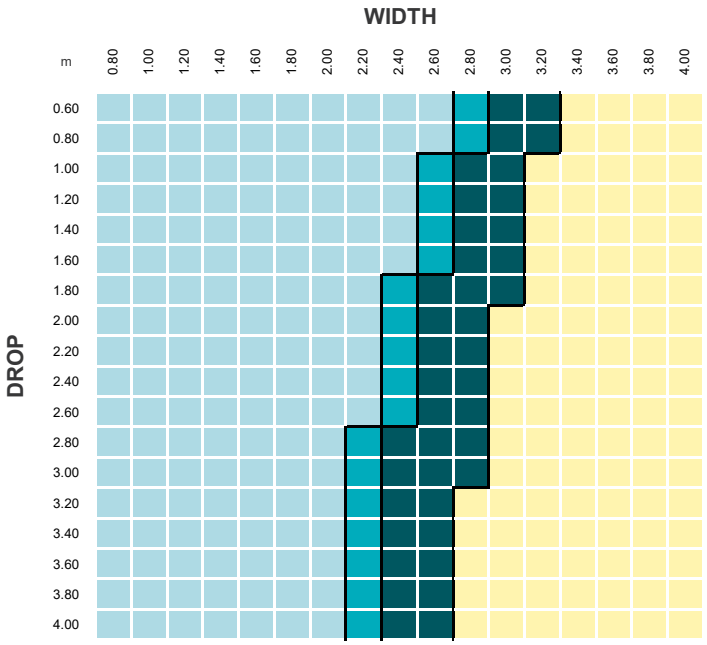


TUBES
S45 | LIGHT
S45 | STANDARD
S45 | HEAVY DUTY
S45 | LINKED

PARAMETERS:

FABRIC DENSITY: 390gsm
FABRIC THICKNESS: 0.6mm
WEIGHT BAR: D30 Bottom Rail
TUBE DEFLECTION: 1.05mm/m

CONTROL CAPACITY

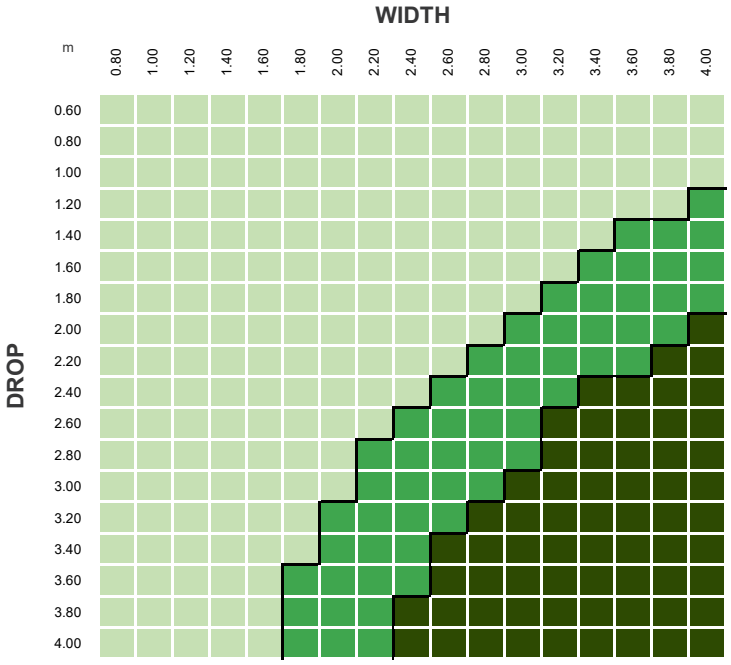

RB09 CONTROL
DIRECT OR GEARED
DIRECT w. BOOSTER OR GEARED
BOOSTER REQUIRED

PARAMETERS:

FABRIC DENSITY: 390gsm
FABRIC THICKNESS: 0.6mm
WEIGHT BAR: D30 Bottom Rail
TUBE DEFLECTION: 1.05mm/m

HOLDING CAPACITY	TUBE		
	S45 LT	S45 STD	S45 HD
RB09	4.7kg	4.6kg	4.2kg
STD BOOSTER	9.1kg	8.9kg	8.0kg
HD BOOSTER	13.3kg	13.1kg	11.8kg


Operating shades at maximum holding capacity will not produce comfortable pull forces.

TEXSTYLE

WWW.TEXSTYLE.COM.AU/COLLECTIONS/BALMORAL


TECHNICAL DATA

SINGLE BRACKETS	SPECIFICATIONS			MAX ROLL
	PITCH	WIDTH	HEIGHT	
LX	40mm	50mm	65mm	75mm
	55mm	50mm	80mm	105mm



CONTROL OPTIONS	MINIMUM SHADE WIDTH (no covers)	TUBE DEDUCTIONS	
		NO BRACKET COVERS	WITH BRACKET COVERS
RB09	150mm	28mm	31mm
RB09 Geared	150mm		
+ STD BOOSTER	817mm		
+ HD BOOSTER	937mm		

Minimum Shade Width based on 5mm gap between hardware in tube.

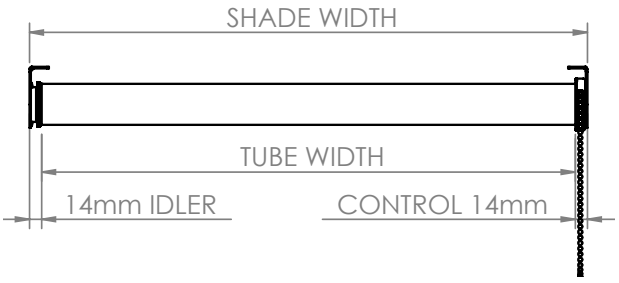

DOUBLE BRACKETS	MAX ROLL	SLIM PROFILE | TOP-FRONT Fabric Roll Options	SLIM PROFILE | TOP-BACK Fabric Roll Options	SQUARE-X Fabric Roll Options	SLIMLINE-X Fabric Roll Options
SLIM PROFILE/SQUARE-X	70mm				
SLIMLINE-X	65mm				

ROLLEASE ACMEDA

RB07/08 CHAIN WINDER

FEATURES & BENEFITS

- Easy-Lock Idler with industry leading simplified 2 step installation.
- 7mm MKII idler extension to correct mis-measured shades on site.
- The discreet release wheel on the Easy-Lock Idler allows for a simplified shade removal.
- Retro-fit an Easy Lift Chain Booster on-site to achieve a lighter lifting solution.
- Compatible with system upgrade solutions to further enhance functionality & aesthetics.
- Optional RB07 chain winder, for integrated chain diverter for smooth operation.
- Premium component design to ensure a smooth, quiet and easy shade lift solution.
- Heavy Duty bracket adaptor available for commercial use.



COLOUR RANGE

- black
- pure white
- sandstone
- silver grey

WEB PAGE LINK


HARDWARE

10 YEAR WARRANTY

EASY-LOCK IDLER

OPTIONS

- *MKI*
- *MKII*

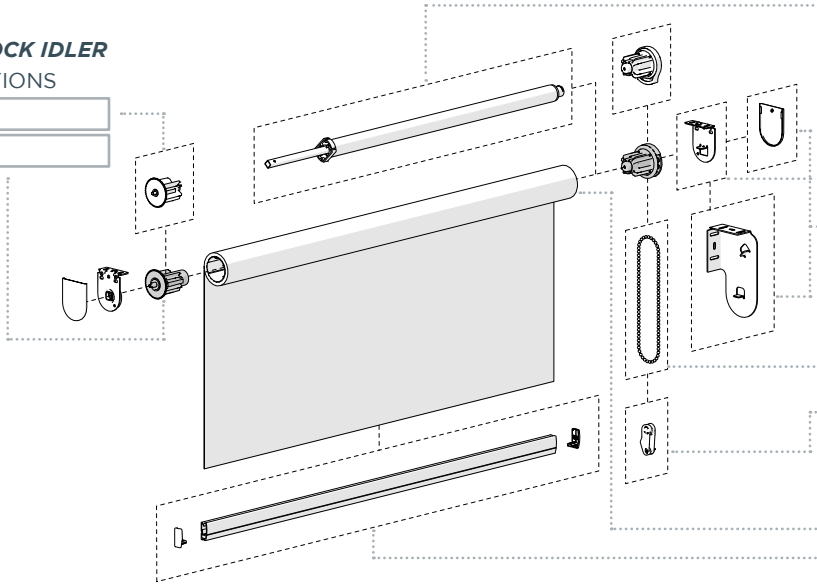

HARDWARE

CONTROLS

- *BOOSTER*
- *CHAIN*
- *TENSIONER*

BRACKETS

- *SINGLE | AX*
- *SINGLE | VX/LX*
- *DOUBLE*

TUBES


- *S40 SERIES*
- *S45 SERIES*

BOTTOM RAILS

- *REFER TO PAGE*


KEY SYSTEM FEATURES

CHAIN ASSEMBLY

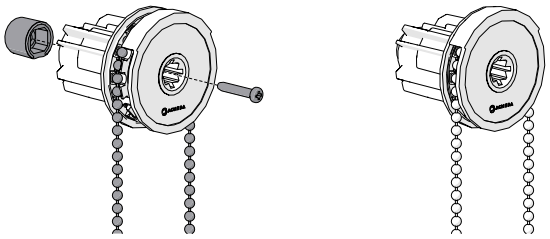


Release the chainwinder cover and add the chain.
Reassemble the chainwinder.

EASY-LOCK IDLER INSTALLATION

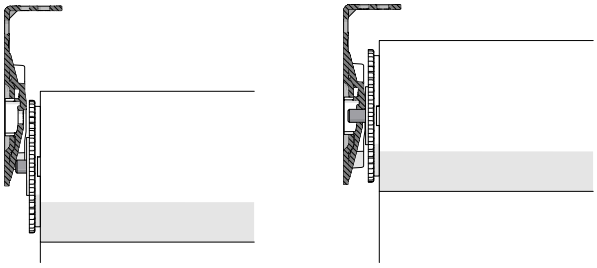


Align with bracket ramp and push into place.

MKII IDLER INSTALLATION ADJUSTMENT

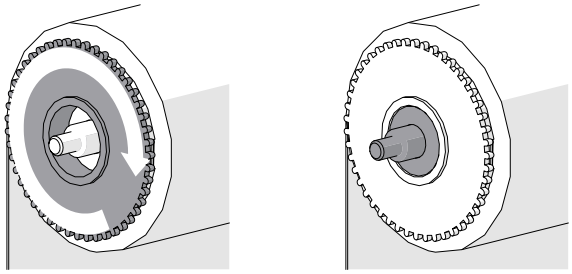


Rotate disk clockwise to extend the pin 7mm.

REMOVING SHADE

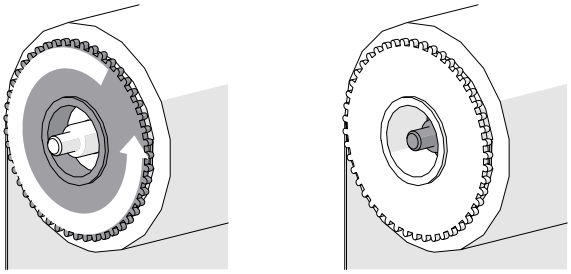

Rotate disk counter clockwise to retract the pin.

SYSTEM UPGRADES:

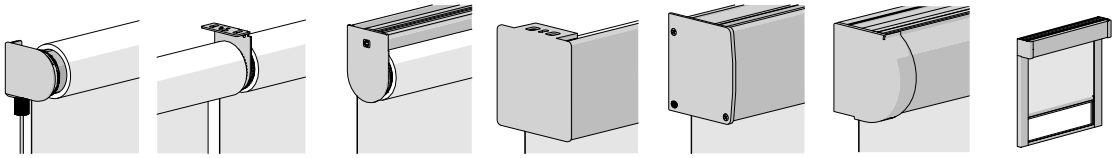


WIRE GUIDE | EASY-LINK | MOUNTING RAIL | FRS VALANCE | P95 PELMET | CF90 | CF EDGE

ROLLEASE ACMEDA

RB07/08 SPECIFICATIONS

TUBE CAPACITY

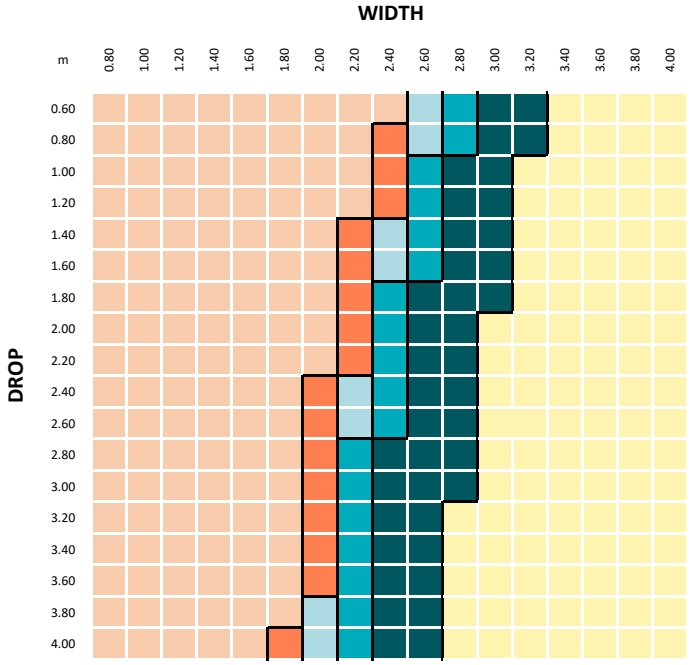


TUBES	RB08
S40 | STANDARD	
S40 | HEAVY DUTY	
S45 | LIGHT	
S45 | STANDARD	
S45 | HEAVY DUTY	
LINKED	

PARAMETERS:

FABRIC DENSITY: 390gsm
FABRIC THICKNESS: 0.6mm
WEIGHT BAR: D30 Bottom Rail
TUBE DEFLECTION: 1.05mm/m

CONTROL CAPACITY

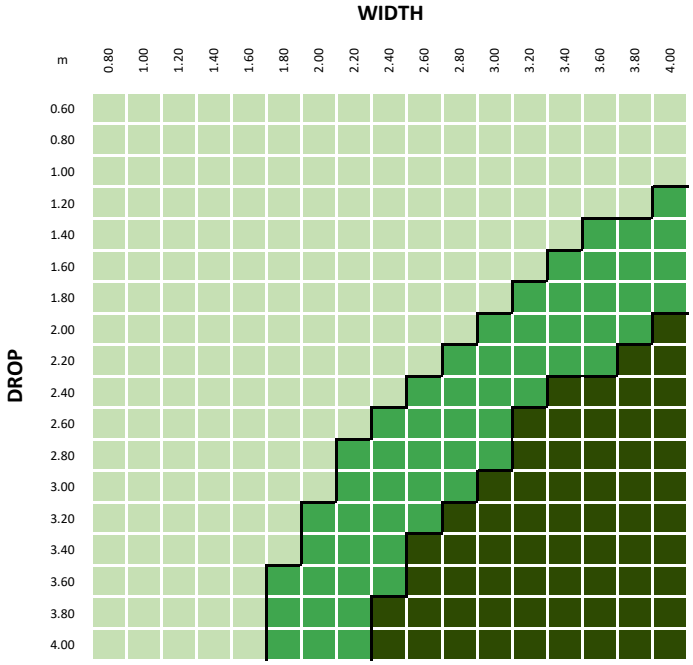

BOOSTER	TYPE
OPTIONAL	STD/HD
RECOMMENDED	STD/HD
REQUIRED	STD/HD

PARAMETERS:

FABRIC DENSITY: 390gsm
FABRIC THICKNESS: 0.6mm
WEIGHT BAR: D30 Bottom Rail

HOLDING CAPACITY	TUBE				
	S40 STD	S40 HD	S45 LT	S45 STD	S45 HD
RB07/08	5.2kg	5.1kg	4.7kg	4.6kg	4.2kg
STD BOOSTER	10.0kg	9.8kg	9.1kg	8.9kg	8.0kg
HD BOOSTER	14.8kg	14.4kg	13.3kg	13.1kg	11.8kg


Operating shades at maximum holding capacity will not produce comfortable pull forces.

TEXSTYLE

WWW.TEXSTYLE.COM.AU/COLLECTIONS/BALMORAL


TECHNICAL DATA

SINGLE BRACKETS	SPECIFICATIONS			MAX ROLL
	PITCH	WIDTH	HEIGHT	
AX	40mm	40mm	60mm	75mm
	55mm	40mm	75mm	105mm
VX	40mm	50mm	65mm	75mm
LX	55mm	50mm	80mm	105mm



CONTROL OPTIONS	MINIMUM SHADE WIDTH (no covers)	TUBE DEDUCTIONS	
		NO BRACKET COVERS	WITH BRACKET COVERS
RB07/08	140mm	28mm	31mm
+ STD BOOSTER	798mm		
+ HD BOOSTER	923mm		

Minimum Shade Width based on 5mm gap between hardware in tube.

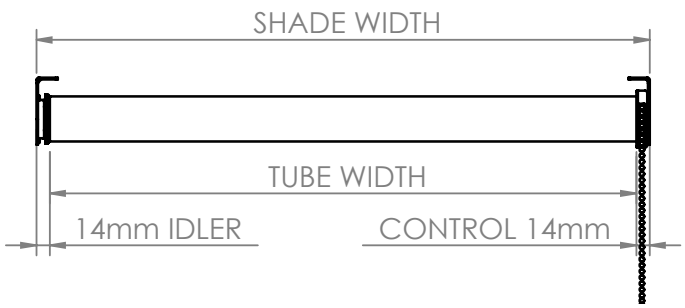

DOUBLE BRACKETS	MAX ROLL	SLIM PROFILE | TOP-FRONT Fabric Roll Options *Requires RB07 at top.*	SLIM PROFILE | TOP-BACK Fabric Roll Options *Requires RB07 at top.*	SQUARE-X Fabric Roll Options	SLIMLINE-X Fabric Roll Options
SLIM PROFILE/SQUARE-X	70mm				
SLIMLINE-X	65mm				

ROLLEASE ACMEDA

EASY-LIFT CHAIN BOOSTER

FEATURES & BENEFITS

- The industry leading RB09 snap-lock booster attachment enables quick fabrication.
- Chain Boosters compatible with RB07/RB08/RB09 chain winders.
- Decreases user effort by up to 60%.
- Control larger linked shades with minimal effort.
- Retro-fit an Easy Lift Chain Booster on-site to achieve a lighter lifting solution.
- Standard and Heavy Duty Springs available.




CHAIN WINDERS

RB09

RB08/RB07

HARDWARE

10 YEAR WARRANTY

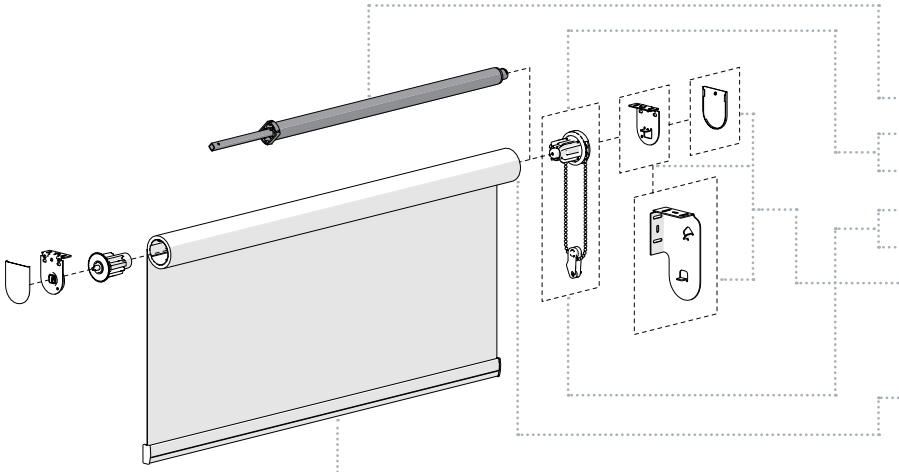

HARDWARE

CONTROLS

- *BOOSTER*
- *RB09*
- *RB07/08*
- *CHAIN*
- *TENSIONER*

BRACKETS

- *SINGLE*
- *DOUBLE*

TUBES


- *S40/S45 SERIES*

BOTTOM RAILS

- *REFER TO PAGE*

KEY SYSTEM FEATURES

SHADE FEELS UP TO 60% LIGHTER TO LIFT*

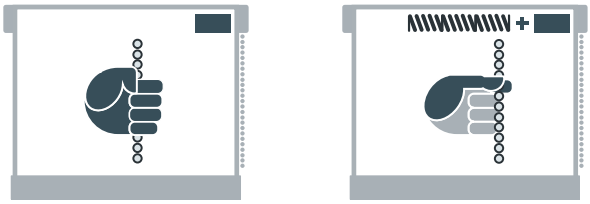

Chain winder. Chain winder with Booster.


**Based on Rollease Acmeda's recommended user effort.*

LARGER SHADES POSSIBLE




Chain winder ONLY. Chain winder with Booster.

RB09 SNAP-LOCK BOOSTER ASSEMBLY

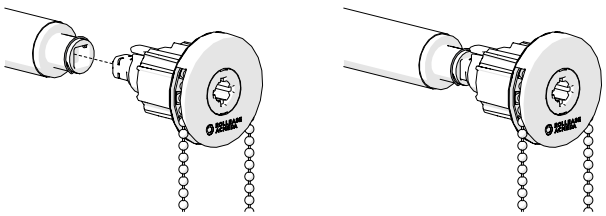


Push components together to assemble.

RB07/RB08 BOOSTER ASSEMBLY

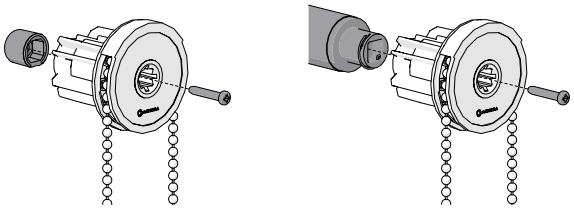

Remove cover and attach booster with chain winder screw.

SYSTEM UPGRADES:

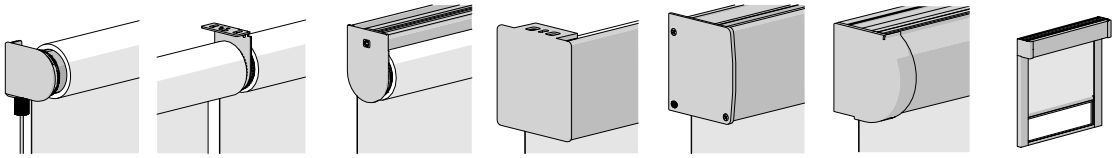

WIRE GUIDE | EASY-LINK | MOUNTING RAIL | FRS VALANCE | P95 PELMET | CF90 | CF EDGE

ROLLEASE ACMEDA


Page is intentionally blank.

CHAINS & ACCESSORIES


Our range of chains and accessories for roller shades includes a variety of metal and plastic chains; available either on the roll or in convenient pre-looped sizes. These are compatible with a large range of chain tensioning devices for both wall and inside recess fixing, to ensure installers comply with the industry child safety regulations.



CHAIN RANGE



PRE-LOOPED



CONTINUOUS

#10/4.5
DOUBLE BEAD
6P/48-49

WEB PAGE LINK

	TYPE		PRE-LOOPED CHAIN LENGTHS									COLOURS					
MATERIAL	CONTINUOUS ROLL 150m	PRE-LOOPED CHAIN	50cm	75cm	100cm	125cm	150cm	175cm	200cm	225cm	250cm	050 - black	069 - pure white	338 - silver grey	412 - birch white	S20 - steel	X10 - stainless steel
PLASTIC	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
STEEL	✓	✓	✓	✓	✓	✓	✓	✓	✓							✓	
STAINLESS STEEL	✓	✓	✓	✓	✓	✓	✓	✓	✓								✓

CHAIN ACCESSORIES

CHAIN STOPPER


BALL		Stainless Steel/Clear Plastic | For Plastic & Metal Chains. Prevents shade from wrapping over the tube or rolling past desired drop. Available in 6.35 & 8mm options.
BARREL		Plastic | For Plastic & Metal Chains. Prevents shade from wrapping over the tube or rolling past desired drop. Available for 8mm only.
WASHER		Rubber | For Plastic & Metal Chains. Stopper halts roller shade at desired height. Soft rubber minimises noise & impact. Clear finish is visually unobtrusive.

CHAIN CONNECTOR

PLASTIC		Connects plastic length of chain into a loop.
METAL		Connects metal length of chain into a loop. Available in Stainless Steel or Nickel Plated Brass.


ASSEMBLY

IMPROVED SHADE USABILITY

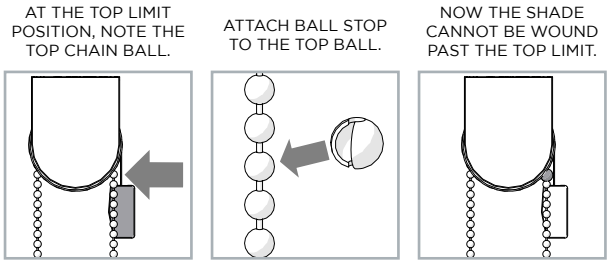

Never pull the shade past the top limit again.

CREATE SHADE LOOPS OF ANY LENGTH

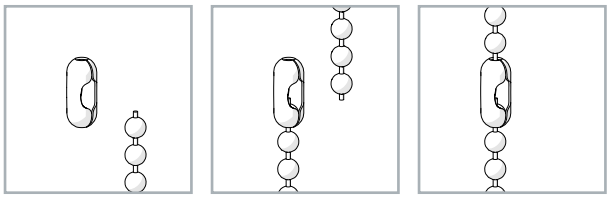

Cut chain to desired length and insert both ends into joiner.

CHAINS & CHILD SAFETY


It's easy to overlook potential hazards for children, especially when their natural curiosity can lead them to explore every crevice and corner of a home. At Rollease Acmeda, child safety is important to us, so we offer a variety of solutions to ensure every home and family is safe from hazards, loose hanging cords or chains.

The current requirements set by the Competition and Consumer (Corded Internal Window Coverings) Safety Standard 2014 states that a corded internal window covering 'must be installed in such a way that a loose cord cannot form a loop 220mm or longer at less than 1,600mm above floor level.'

Our range of products offer an innovative suite of child safe solutions that easily comply with these regulations without compromising functionality or design of window furnishings.

INSTALLATION HEIGHT

CHAIN TENSIONER MUST BE USED IF THE CHAIN IS LESS THAN 1.6m ABOVE THE FLOOR

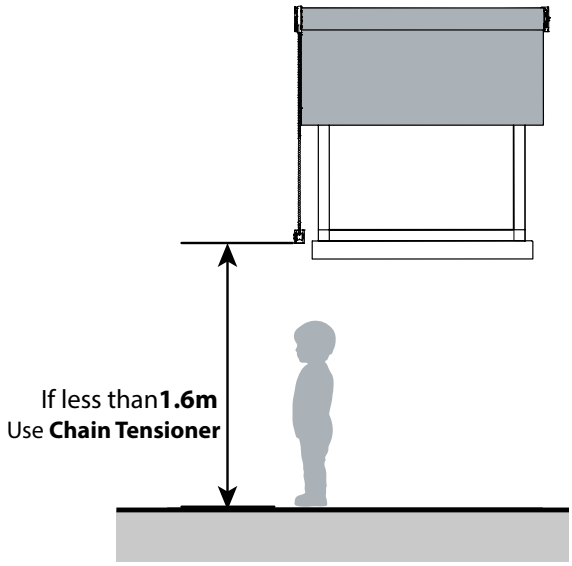

ACCC INSTALLATION REQUIREMENTS:

(1) A corded internal window covering must be installed: (a) in such a way that a loose cord cannot form a loop 220 mm or longer at less than 1,600 mm above floor level; and (b) using any components specified in the installation instructions as necessary to meet requirements for cord safety.




(2) A corded internal window covering must also be installed in accordance with: (a) the installation instructions on any retail packaging for the covering; and (b) other information provided in the installation instructions about how to install the corded internal window covering for the purpose of ensuring that a loose cord cannot form a loop as described in paragraph (1) (a).

(3) No part of a cord guide may be installed lower than 1,600 mm above floor level unless: (a) the cord guide will remain firmly attached to a wall or other structure specified in the installation instructions when subjected to a tension force of 70 N applied in any direction for 10 seconds; and (b) the cord is sufficiently secured or tensioned to prevent the formation of a loop 220 mm or longer.

(4) A cleat used to secure a cord must be installed at least 1,600mm above floor level.


LABELLING REQUIREMENTS:

(1) A person installing a corded internal window covering must: (a) attach a label to the corded window covering containing the name and contact details of the person or company responsible for the installation; and (b) ensure that any warning label or swing tag supplied with the corded internal window covering remains attached to the cord.

		WEB PAGE LINK	FIXING			COLOURS			
			Face Fix	Recess Fix	Floor Fix	000/001 - clear	050 - black	069 - white	338 - silver grey
UNIVERSAL			✓	✓		✓	✓	✓	
HOOK			✓	✓		✓			
CHAIN TENSIONER			✓		✓		✓	✓	✓
				✓			✓	✓	✓

HANG TAG





MOTORS | SUMMARY

KEY FEATURES SUMMARY	Li-ion	DC	AC
SIMPLIFIED RETRO-FIT Motor can replace a chain winder without modifying the hardware, maintaining a minimal hardware gap.	✓	✓	
PATENTED MOTOR HEAD DESIGN Offers the smallest light gap and antenna cable can be concealed within the motor head.	✓	✓	
INNOVATIVE MOTOR CAP Optional, custom designed accessory for no visible wires.	✓	✓	
ELEGANT SOFT STOP Slows the motor down prior to reaching shade limits, coming to a gradual stop.	✓	✓	
MICRO USB CHARGING Custom motor charger not required. Utilise any micro USB cable and charger to renew battery.	✓		
CONTINUOUS POWER A continuously powered solution that has three optional 12V power sources.		✓	
CONTINUOUS POWER A continuously powered solution connected to the mains 240V electrical grid.			✓
BATTERY CHECK When paired with Push series remotes, motor will move shade to indicate battery percentage remaining.	✓		
NARROW SHADE WIDTHS Shades can be made at a minimum width of 432mm and powered using external battery pack for door shading applications.		✓	
RELIABLE OPERATION Hardwired installation prevents interference from other devices.			✓


	SPECIFICATIONS	Li-ion		DC	AC	
		5V ZERO	12V	12V ZERO	240V E6	240V M6
TORQUE	0.7Nm	✓				
	1.1Nm	✓		✓		
	2.0Nm	✓		✓		
	3.0Nm		✓			
	6.0Nm				✓	✓
POWER	Lithium-ion Battery	✓	✓			
	DC 12V Low Voltage			✓		
	AC 240V Mains				✓	✓
FEATURES	Zero Motor Head	✓		✓		
	Motor Cap	✓		✓		
	Quiet	✓		✓		
	Elegant Soft Stop	✓		✓		
	Battery Check Action	✓		✓		
	Micro USB Charging	✓				
	Secure Hold	✓	✓	✓		
	Simplified Retro-Fit	✓		✓		
	Bidirectional Communication	✓	✓	✓	✓	
	Adjustable Speed	✓	✓	✓		
	Simplified Setup	✓	✓	✓	✓	
	Favourite Positioning	✓	✓	✓	✓	
	Precise Limit Adjustment	✓	✓	✓	✓	
	Electronic Limit Setting	✓	✓	✓	✓	
	Mechanical Limit Setting					✓
CONTROLS	Push Remotes	✓	✓	✓	✓	
	Pulse PRO	✓	✓	✓	✓	
	Wall Controls	✓	✓	✓	✓	
ACCESSORIES	Solar Panel V2	✓				
	Internal Sun Sensor	✓	✓	✓	✓	
	ARC Repeater	✓	✓	✓	✓	
	ARC Relay Module	✓	✓	✓	✓	
	DC Power Distribution Panel			✓		
	Rechargeable Battery Pack			✓		
	Extension Cables	✓	✓	✓		
	Wall Charger	✓	✓			

AUTOMATE MOTORS ARE COMPATIBLE WITH THE FOLLOWING:

Works with alexa · Works with Apple Home Kit · ELAN · Control4 Certified · works with Google Assistant · HomeSeer · SAVANT · Works with SmartThings · AMX by HARMAN · CRESTRON · Works with IFTTT · CRESTRON HOME™

HOME AUTOMATION FEATURES

AUTOMATE SHADES APP



VOICE CONTROL



Effortless control of motorised shades when at home or away. Personalise the daily routine via groups, rooms and timers.

SUNSET/SUNRISE TIMERS



Set shades to follow the sun.

LINQ TOOL



Connect to smart home systems.

HOME AUTOMATION | PULSE PRO

- Group Automate shades by room and conveniently control them accordingly.
- Personalise shade control and organise how your shades operate by specific daily events or scenes automatically ant the optimal time.
- Roller shades, Drapery, Outdoor Shades, Awnings.... control every shade type from one screen.
- Installers have access to information that assists them identify potential issues.
- The signal indicator highlights when there is no connection between the motor and the hub, to assist with troubleshooting.
- The APP is available in English, Italian, Dutch, French or German.



REMOTE CONTROLS

PUSH SERIES



Push ONE, 5 Channel, 15 Channel & Push PRO Remotes

WALL CONTROLS



1, 2 & 15 Channel Controls

ACCESSORIES | GENERAL

ARC REPEATER



Extend range of ARC Protocols.

INTERNAL SUN SENSOR



Control shades with a choice of preset light thresholds and control modes.


ACCESSORIES | COMMERCIAL

DC POWER DISTRIBUTION PANEL



- Power your Automate DCRF motors from a compact, central location that can service up to 18 motors.
- Easily check each individual motors power status by viewing the prominent green LED's on the DC Power Panel.
- The panel can be used with many different wire types (from 26 to 14 AWG). Any pre-wired installation may readily use DCRF motors and the Power Distribution Panel.

ARC RELAY TRANSMITTER




- Provide interface between third party smart home motor systems and ARC motors.
- Three contact inputs - Up, Down & Stop.
- Group Motor Control.
- Wireless control of ARC motors.
- Roller mode and Step mode for venetian motors.
- 12V or 24V power source compatible.

MOTORS | BATTERY

FEATURES & BENEFITS

- Patent ZERO motor head conceals all wires by wrapping them around the head.
- Retro-fit solution, turn manual blinds into motorised shades with ease, simply remove winder, insert motor & operate.
- Soft Stop technology which slows the blind prior to stopping.
- Micro USB 5 volt charging.
- Colour matching motor head cap conceals hardware.
- Long lasting battery - up to 500 cycles per charge.

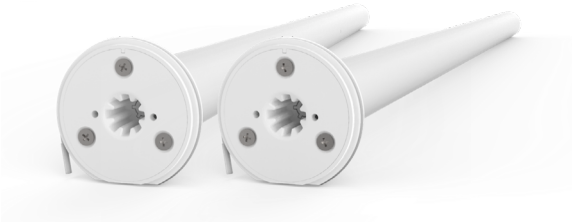

COLOUR RANGE


black

pure white

WEB PAGE LINK

MOTOR HARDWARE

5 YEAR WARRANTY

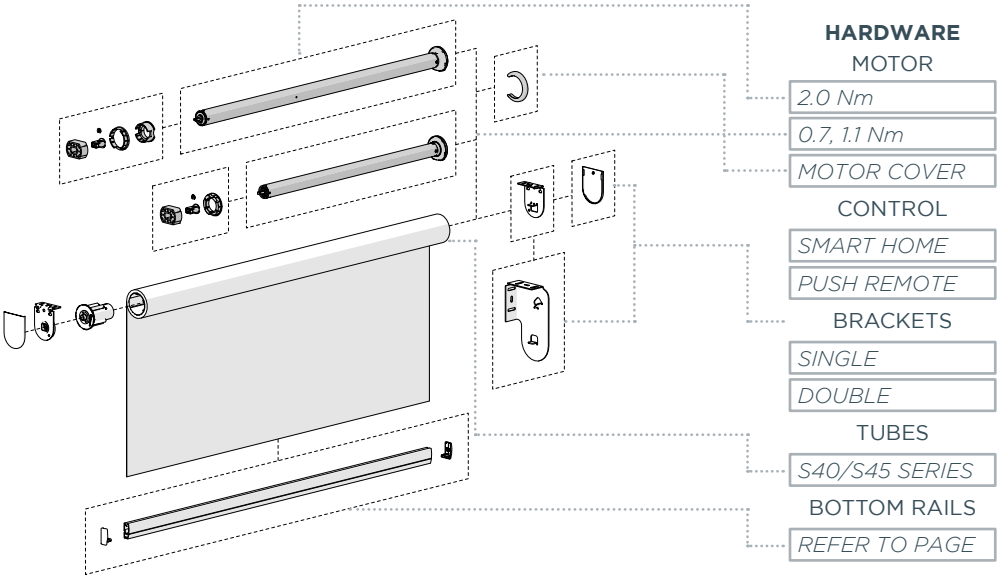

HARDWARE

MOTOR

- *2.0 Nm*
- *0.7, 1.1 Nm*
- *MOTOR COVER*

CONTROL

- *SMART HOME*
- *PUSH REMOTE*

BRACKETS

- *SINGLE*
- *DOUBLE*

TUBES


- *S40/S45 SERIES*

BOTTOM RAILS

- *REFER TO PAGE*

KEY SYSTEM FEATURES


ZERO VISIBLE WIRES

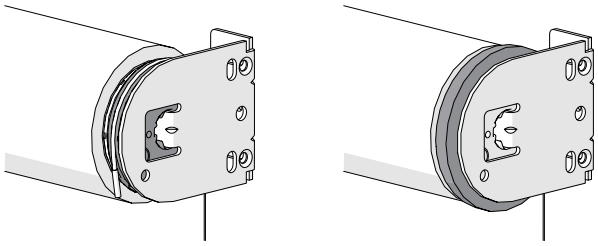

The motor head has a slot which retains the antenna.


Hide the motor head with a colour matched Motor Cap.

RETRO-FIT SOLUTION

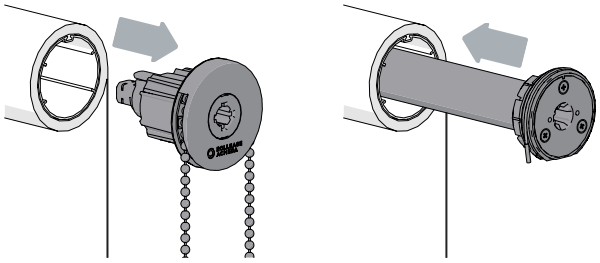


Replace a chain control with a ZERO Li-ion motor without having to change any existing hardware.

SOFT STOP

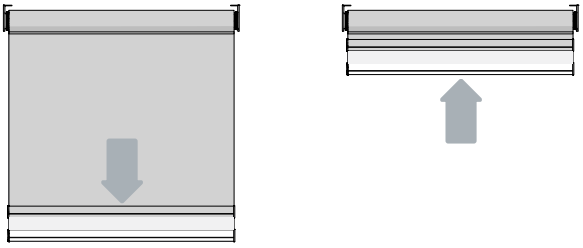


Shade gradually reduces speed when coming to a stop for ultra-smooth movement.

MICRO USB CHARGING

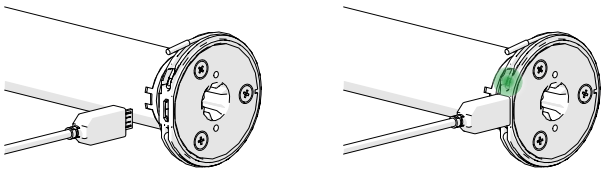

LED behind button will glow to indicate successful charging.

SYSTEM UPGRADES:

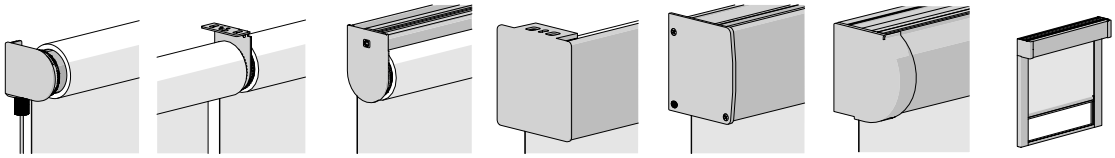


WIRE GUIDE | EASY-LINK | MOUNTING RAIL | FRS VALANCE | P95 PELMET | CF90 | CF EDGE

ROLLEASE ACMEDA

MOTORS | BAT. SPECIFICATIONS

TUBE CAPACITY

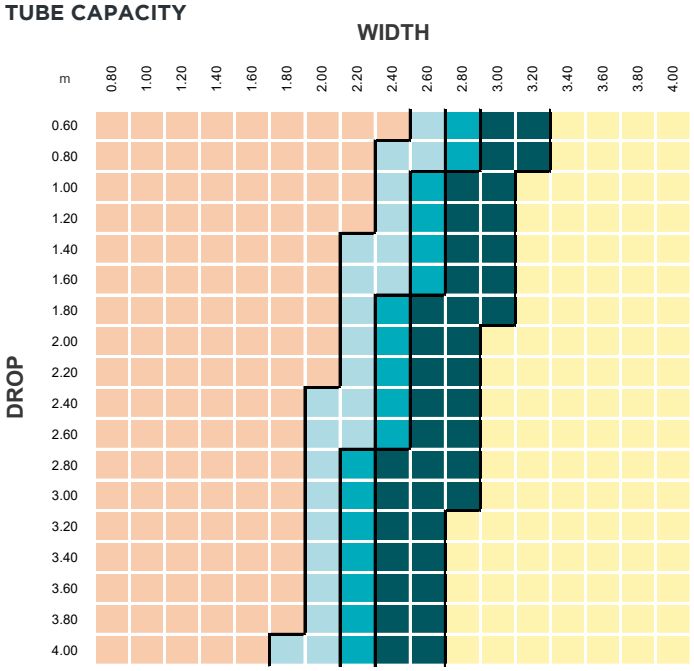


TUBES
S40 | STANDARD
S45 | LIGHT
S45 | STANDARD
S45 | HEAVY DUTY
LINKED

PARAMETERS:

FABRIC DENSITY: 390gsm
FABRIC THICKNESS: 0.6mm
WEIGHT BAR: D30 Bottom Rail
TUBE DEFLECTION: 1.05mm/m

NOTE: S40 IS ONLY COMPATIBLE WITH 0.7, 1.1Nm MOTORS

CONTROL CAPACITY

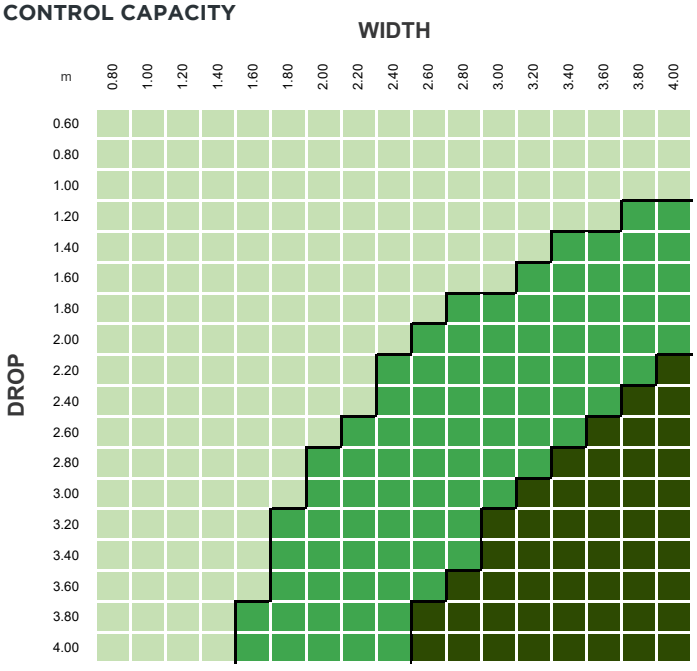

MOTOR
0.7Nm
1.1Nm
2.0Nm | 3.0Nm | 6.0Nm

PARAMETERS:

FABRIC DENSITY: 390gsm
FABRIC THICKNESS: 0.6mm
WEIGHT BAR: D30 Bottom Rail
TUBE DEFLECTION: 1.05mm/m

LIFTING CAPACITY	TUBE			
	S40 STD	S45 LT	S45 STD	S45 HD
0.7Nm	3.7kg	3.3kg	3.2kg	2.9kg
1.1Nm	5.8kg	5.2kg	5.1kg	4.6kg
2.0Nm	-	9.4kg	9.2kg	8.3kg
6.0Nm	-	28.3kg	27.7kg	25kg


NOTE: *6Nm motors require LX HD Brackets, or the use of the HD Adaptor on Double Brackets.*

TEXSTYLE

WWW.TEXSTYLE.COM.AU/COLLECTIONS/BALMORAL

TECHNICAL DATA

SINGLE BRACKETS	SPECIFICATIONS			MAX ROLL
	PITCH	WIDTH	HEIGHT	
AX	40mm	40mm	60mm	75mm
	55mm	40mm	75mm	105mm
VX/LX	40mm	50mm	65mm	75mm
LX	55mm	50mm	80mm	105mm




CONTROL OPTIONS	MINIMUM SHADE WIDTH (no covers)	TUBE DEDUCTIONS	
		NO BRACKET COVERS	WITH BRACKET COVERS
ZERO 0.7Nm	569mm	26mm	*28mm
ZERO 1.1Nm	642mm		
ZERO 2.0Nm	739mm		
ZERO 6.0Nm	755mm	30mm	32mm

Add +1mm to deductions for Motor Cover installations.

TUBE WIDTH = SHADE WIDTH - [CONTROL + IDLER]

Minimum Shade Width based on 5mm gap between hardware in tube.

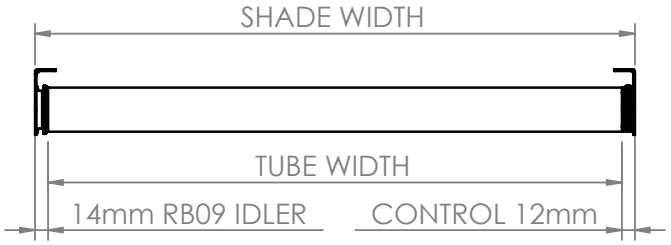

DOUBLE BRACKETS	MAX ROLL	SLIM PROFILE | TOP-FRONT Fabric Roll Options	SLIM PROFILE | TOP-BACK Fabric Roll Options	SQUARE-X Fabric Roll Options	SLIMLINE-X Fabric Roll Options
SLIM PROFILE/SQUARE-X	70mm				
SLIMLINE-X	65mm				

ROLLEASE ACMEDA

MOTORS | DC

FEATURES & BENEFITS

- Low voltage continuous powered.
- Multiple power options: Power Supply, DC Power Panel, Battery Pack.
- Patent ZERO motor head conceals all wires by wrapping them around the head.
- Retro-fit solution, turn manual blinds into motorised shades with ease, simply remove winder, insert motor & operate.
- Soft Stop technology which slows the blind prior to stopping.
- Colour matching motor head cap conceals hardware.
- Smallest motorised blind width.




COLOUR RANGE

pure white

WEB PAGE LINK

MOTOR HARDWARE

7 YEAR WARRANTY

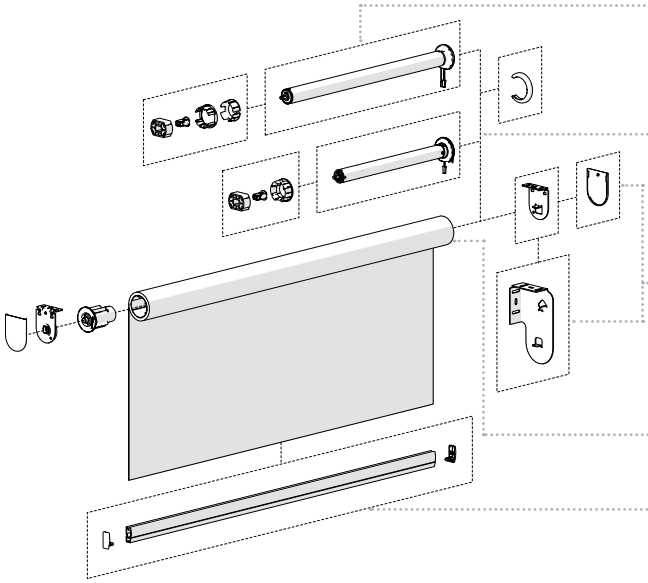

HARDWARE

MOTOR
- *2.0 Nm*
- *1.1 Nm*

CONTROL
- *SMART HOME*
- *PUSH REMOTE*


BRACKETS
- *SINGLE*
- *DOUBLE*

TUBES
- *S40/S45 SERIES*

BOTTOM RAILS
- *REFER TO PAGE*

KEY SYSTEM FEATURES


ZERO VISIBLE WIRES

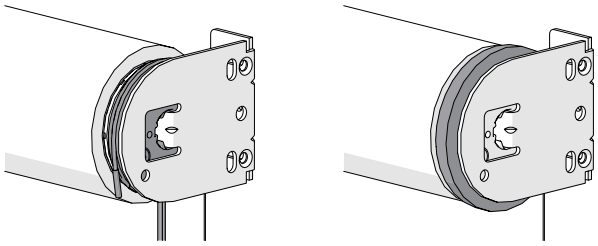

The motor head has a slot which retains the antenna.


Hide the motor head with a colour matched Motor Cap.

RETRO-FIT SOLUTION

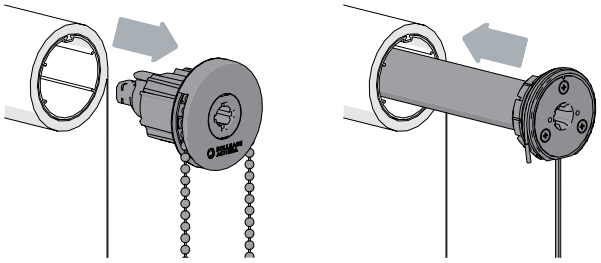

Replace a chain control with a ZERO Li-ion motor without having to change any existing hardware.

SOFT STOP

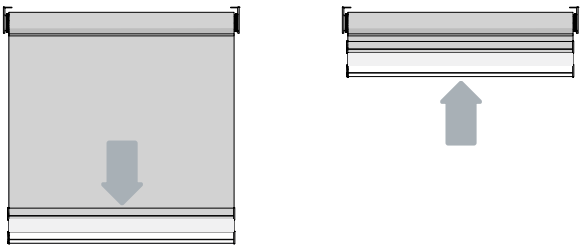

Shade gradually reduces speed when coming to a stop for ultra-smooth movement.

CHARGING OPTIONS




Power Supply

DC Power Panel

Battery Pack

SYSTEM UPGRADES:

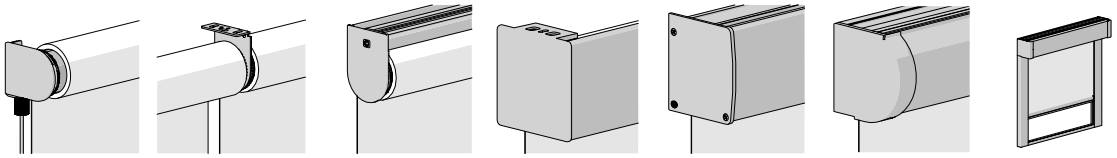


WIRE GUIDE | EASY-LINK | MOUNTING RAIL | FRS VALANCE | P95 PELMET | CF90 | CF EDGE

ROLLEASE ACMEDA

MOTORS | DC SPECIFICATIONS

TUBE CAPACITY

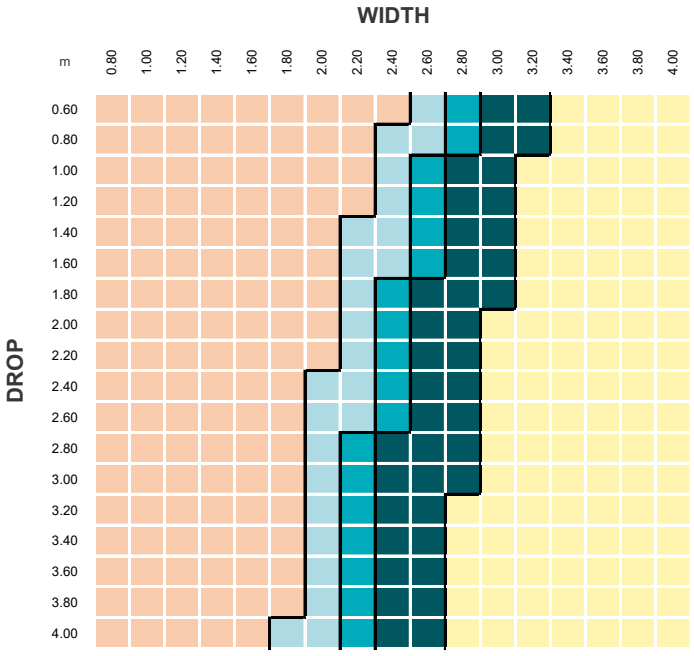


TUBES	
S40 | STANDARD	
S45 | LIGHT	
S45 | STANDARD	
S45 | HEAVY DUTY	
LINKED	

PARAMETERS:

FABRIC DENSITY: 390gsm
FABRIC THICKNESS: 0.6mm
WEIGHT BAR: D30 Bottom Rail
TUBE DEFLECTION: 1.05mm/m

NOTE: S40 IS ONLY COMPATIBLE WITH 0.7, 1.1Nm MOTORS

CONTROL CAPACITY

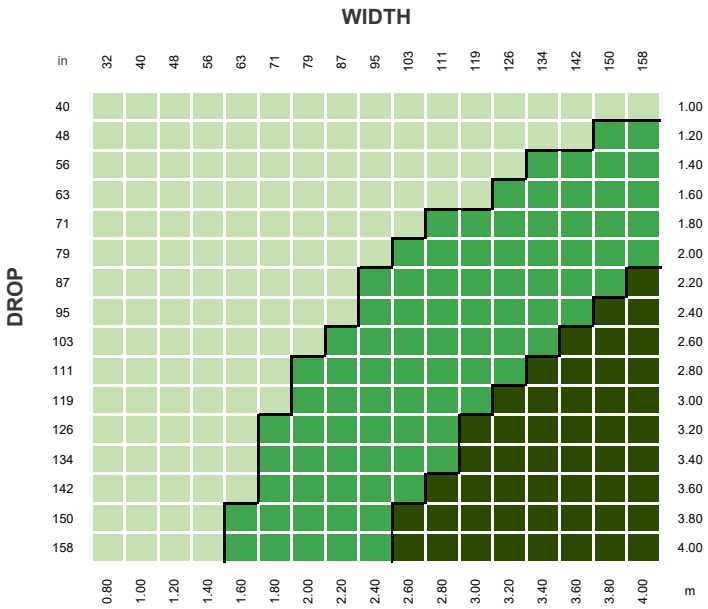

MOTOR	
0.7Nm	
1.1Nm	
2.0Nm | 3.0Nm | 6.0Nm	

PARAMETERS:

FABRIC DENSITY: 390gsm
FABRIC THICKNESS: 0.6mm
WEIGHT BAR: D30 Bottom Rail
TUBE DEFLECTION: 1.05mm/m


LIFTING CAPACITY	TUBE			
	S40 STD	S45 LT	S45 STD	S45 HD
ZERO 1.1 Nm	5.8kg	5.2kg	5.1kg	4.6kg
ZERO 2.0 Nm	-	9.4kg	9.2kg	8.3kg

TEXSTYLE

WWW.TEXSTYLE.COM.AU/COLLECTIONS/BALMORAL

TECHNICAL DATA

SINGLE BRACKETS	SPECIFICATIONS			MAX ROLL
	PITCH	WIDTH	HEIGHT	
AX	40mm	40mm	60mm	75mm
	55mm	40mm	75mm	105mm
VX/LX	40mm	50mm	65mm	75mm
LX	55mm	50mm	80mm	105mm




CONTROL OPTIONS	MINIMUM SHADE WIDTH (no covers)	TUBE DEDUCTIONS	
		NO BRACKET COVERS	WITH BRACKET COVERS
ZERO DC 1.1Nm	432mm	26mm	*28mm
ZERO DC 2.0Nm	576mm		

Add +1mm to deductions for Motor Cover installations.

TUBE WIDTH = SHADE WIDTH - [CONTROL + IDLER]

Minimum Shade Width based on 5mm gap between hardware in tube.

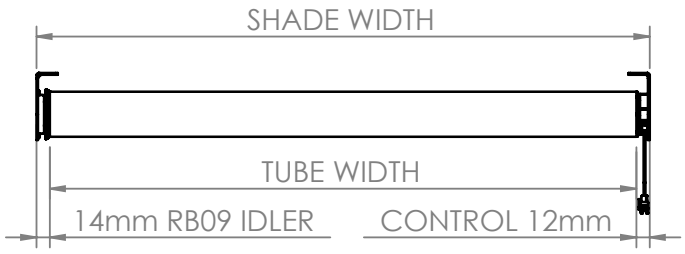


DOUBLE BRACKETS	MAX ROLL	SLIM PROFILE | TOP-FRONT Fabric Roll Options	SLIM PROFILE | TOP-BACK Fabric Roll Options	SQUARE-X Fabric Roll Options	SLIMLINE-X Fabric Roll Options
SLIM PROFILE/SQUARE-X	70mm				
SLIMLINE-X	65mm				

ROLLEASE ACMEDA

MOTORS | AC

FEATURES & BENEFITS

- Compatible with building automations system controllers.
- Control large shades with 6Nm of torque and 28rpm.
- Constant power.
- Manually set and adjust the limits of M6 motors.
- HD Adapter for double bracket installations.

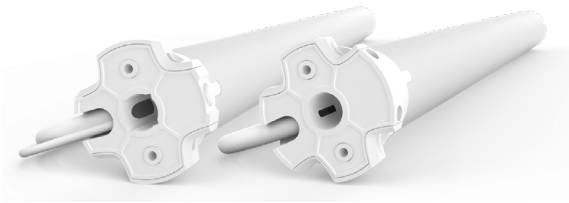


COLOUR RANGE

pure white

WEB PAGE LINK

MOTOR HARDWARE

7 YEAR WARRANTY

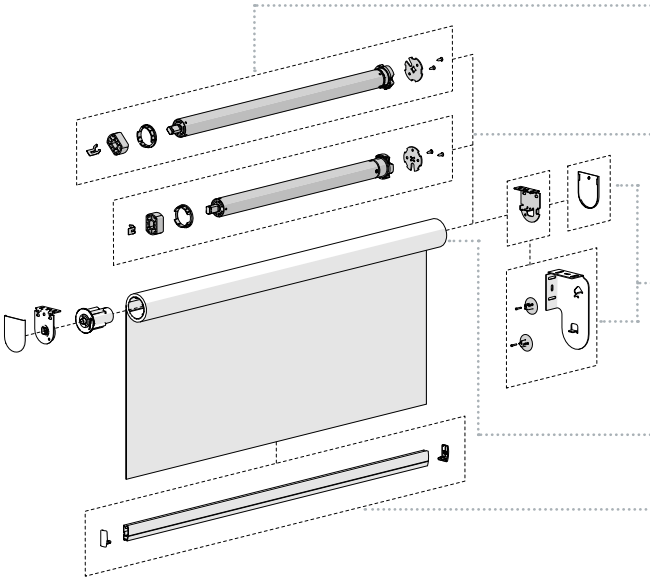

HARDWARE

MOTOR
- *E6*
- *M6*

CONTROL
- *SMART HOME*
- *PUSH REMOTE*

BRACKETS
- *SINGLE | LX M40*
- *DOUBLE*

TUBES
- *S40/S45 SERIES*
- *S60 SERIES*

BOTTOM RAILS
- *REFER TO PAGE*

KEY SYSTEM FEATURES

BUILDING AUTOMATION SYSTEM CONTROLLERS


M6 AC Motor integration with smart building controllers.

ACHIEVE LARGER WINDOWS OR HEAVIER SHADES



6Nm TORQUE, 28rpm SPEED

MANUAL AUTOMATE M6 LIMIT SETTING




Manually set/adjust the limits of the M6 motor without electronic wireless controllers.

AUTOMATE E6 CONTROLLERS



Compatible with Automate ARC range of controllers.

MEDIUM SYSTEM UPGRADES & OPTIONS:

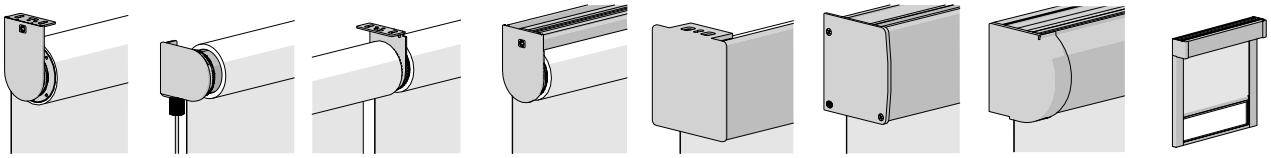


S45 TO S60 | WIRE GUIDE | EASY-LINK | MOUNTING RAIL | FRS VALANCE | P95 PELMET | CF90 | CF EDGE

ROLLEASE ACMEDA

MOTORS | AC SPECIFICATIONS

TUBE CAPACITY

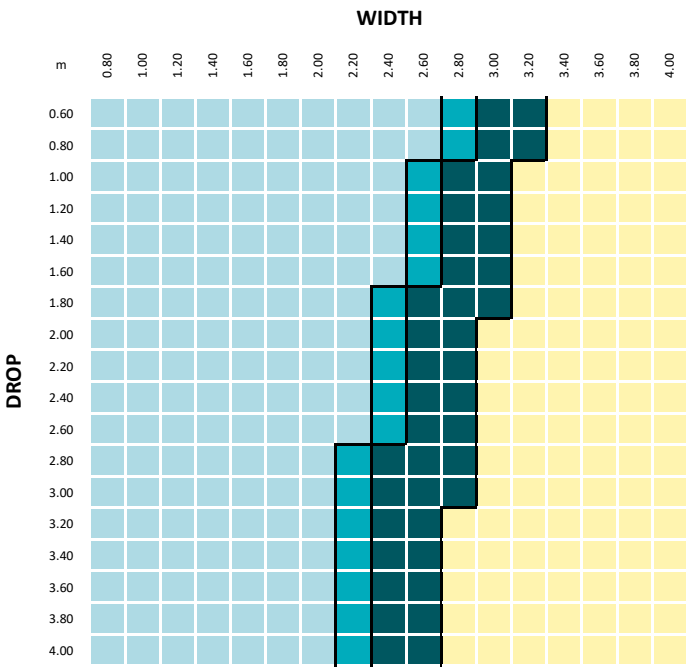


TUBES	6.0Nm
S45 | LIGHT	
S45 | STANDARD	
S45 | HEAVY DUTY	
LINKED	

PARAMETERS:

FABRIC DENSITY: 390gsm
FABRIC THICKNESS: 0.6mm
WEIGHT BAR: D30 Bottom Rail
TUBE DEFLECTION: 1.05mm/m


AC MOTOR DEDICATED SINGLE BRACKETS

Brackets designed to handle the increased motor capacity.

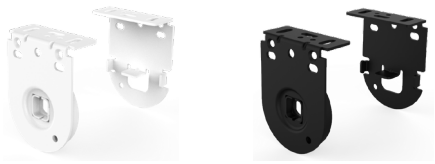

DOUBLE BRACKET COMPATIBILITY

The HD Adapter increases the strength of the bracket for optimal compatibility with the Rollease Acmeda 6.0Nm motors.

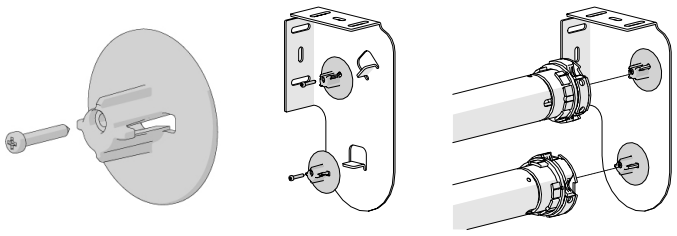


LIFTING CAPACITY	TUBE		
	S45 LT	S45 STD	S45 HD
6Nm	28.3kg	27.7kg	25.0kg

TEXSTYLE

WWW.TEXSTYLE.COM.AU/COLLECTIONS/BALMORAL

TECHNICAL DATA

SINGLE BRACKETS	SPECIFICATIONS			MAX ROLL
	PITCH	WIDTH	HEIGHT	
LX M40	40mm	50mm	65mm	75mm
	55mm	50mm	80mm	105mm




CONTROL OPTIONS	MINIMUM SHADE WIDTH (no covers)	TUBE DEDUCTIONS	
		NO BRACKET COVERS	WITH BRACKET COVERS
E6	674mm	30mm	32mm
M6	567mm	30mm	32mm

TUBE WIDTH = SHADE WIDTH - [CONTROL + IDLER]

DOUBLE BRACKETS = ADD 2mm to all values in above table.

Minimum Shade Width based on 5mm gap between hardware in tube.

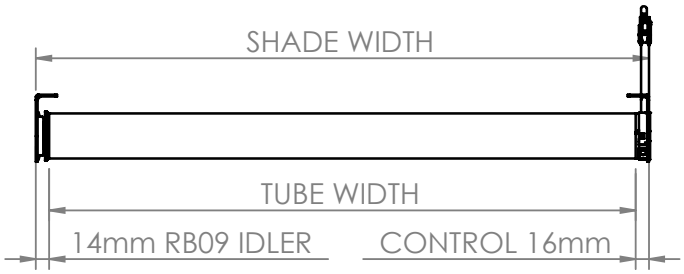

DOUBLE BRACKETS	MAX ROLL	SLIM PROFILE | TOP-FRONT Fabric Roll Options	SLIM PROFILE | TOP-BACK Fabric Roll Options	SQUARE-X Fabric Roll Options	SLIMLINE-X Fabric Roll Options
SLIM PROFILE/SQUARE-X	70mm				
SLIMLINE-X	65mm				

ROLLEASE ACMEDA

EASY SPRING AIR

FEATURES & BENEFITS



- A child-safe, chain-free shading solution.
- Intuitive operation, simply position the shade by raising or lowering the bottom rail.
- Fully adjustable spring ensures a perfectly balanced shade in every installation.
- Limiter prevents accidental pre-tension loss.
- Tension Lock securely retains pre-tension during transportation, reducing installation time.
- Can be made as narrow as 498mm, perfect for small window applications such as bathroom windows.
- The handle provides a clear visual cue for operating the shade and can also be used with a pull stick for hard-to-reach areas.


COLOUR RANGE

pure white

WEB PAGE LINK

HARDWARE

5 YEAR WARRANTY

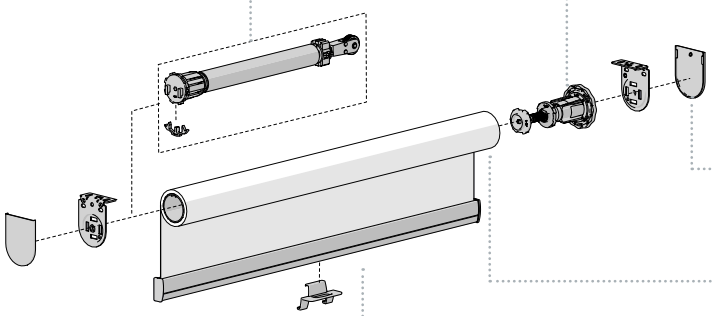

HARDWARE

SPRING
- *MICRO*
- *MINI*
- *SMALL*
- *LIGHT*
- *MEDIUM*
- *HEAVY*

LIMITER
- *UNIV. LIMITER*


BRACKETS
- *SKYLINE | LX*

TUBES
- *S45 SERIES*

BOTTOM RAILS
- *D30 SILENT*

KEY SYSTEM FEATURES


BALANCED SHADE

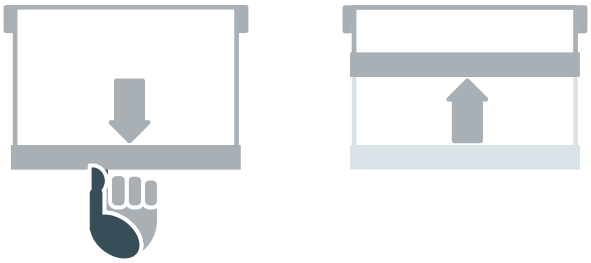

1. Pull Bottom Rail downwards and release at desired location.


2. Raise Bottom Rail and release at desired location.

TOP LIMIT POSITION

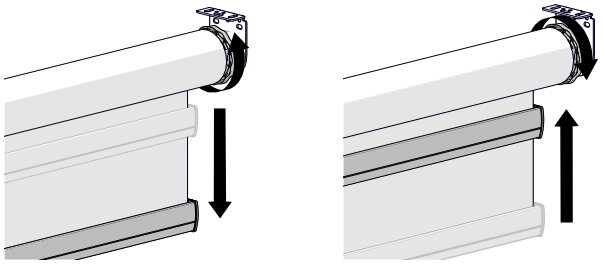


Rotate Limiter head to adjust the top limit position once installed.

ADJUSTABLE SPRING TENSION

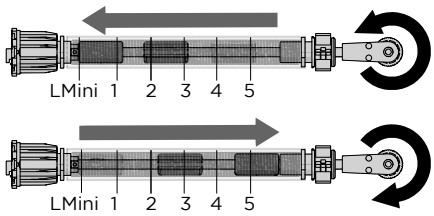

Spring rate can be easily adjusted via the wheel to ensure a perfectly balanced shade is achieved.


TENSION LOCK FOR HANDLING

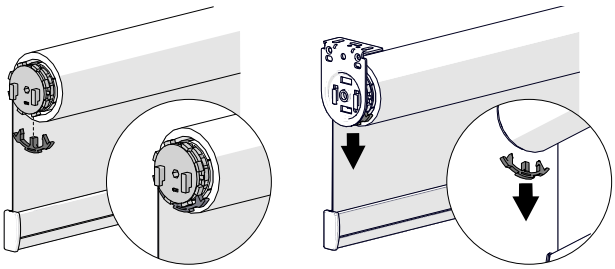

Attach Pre-Tension Retaining Clip during assembly.

Remove Pre-Tension Retaining Clip after installation.

SYSTEM UPGRADES

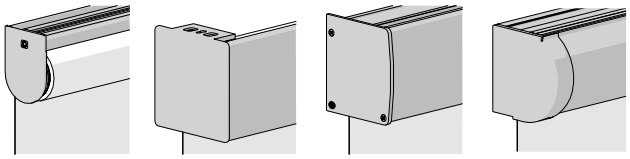

MOUNTING RAIL | FRS VALANCE | P95 PELMET | CF90

ROLLEASE ACMEDA

EASY SPRING AIR SPEC.

SYSTEM RECOMMENDATIONS

Follow system recommendations for optimal performance.


Please refer to the support documentation on the ESA product page to generate recommendations for spring selection, plug position and number of pre-turns for specific shade parameters.


Use the Roller Shade Calculator for configuring individual shades.

Use the ESA Chart Generator to generate a system chart for specific fabric, tube & bottom rail combinations.

Balanced systems perform optimally when the bottom rail weighs approximately 500g/m. Ensure the specific weight is used with the calculators.

SNAP FIT HANDLE






Align top grip into groove and snap into place.

NOTE: *Always operate the shade from the middle of the bottom rail.*

SYSTEM CAPACITY

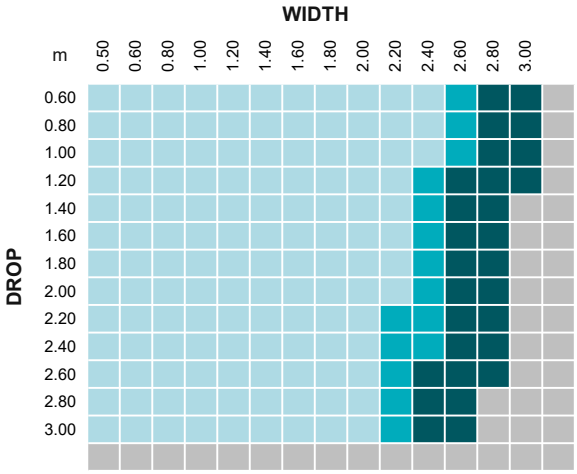

TUBE
S45 LT
S45 STD
S45 HD
OUTSIDE PRODUCT SPECIFICATION

PARAMETERS:

FABRIC DENSITY: 390gsm

FABRIC THICKNESS: 0.6mm

WEIGHT BAR: D30 + Ballast (500g/m)


NOTE: *Using alternative parameters will change the system capacity.*

TEXSTYLE

WWW.TEXSTYLE.COM.AU/COLLECTIONS/BALMORAL

TECHNICAL DATA

SINGLE BRACKETS	SPECIFICATIONS			MAX ROLL
	PITCH	WIDTH	HEIGHT	
LX 40mm	40mm	50mm	65mm	75mm

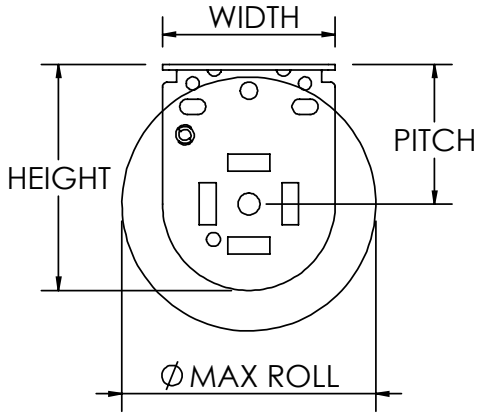


SPRING SIZE	MINIMUM SHADE WIDTH*	TUBE DEDUCTION*
MICRO	498mm	32mm
MINI	498mm	
SMALL	700mm	
LIGHT	700mm	
MEDIUM	1010mm	
HEAVY	1110mm	

Add +2mm for bracket covers.

TUBE WIDTH = SHADE WIDTH - [TUBE DEDUCTIONS]

Minimum Shade Width based on 5mm gap between hardware in tube.

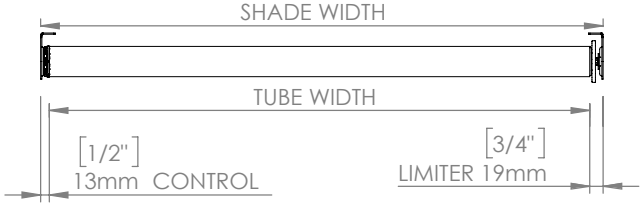


ROLLEASE ACMEDA

ALUMINIUM TUBES


TECHNICAL DATA

S40




TYPE		39 SPLINE	T-SPLINE	HD
O.D.		39.0mm	39.4mm	40.0mm
D/S TAPE		✓	✓	-
T-SPLINE		-	✓	-
9mm FLAT SPLINE		✓	-	✓
CHAIN	RB07	✓	✓	✓
	RB08	✓	✓	✓
	RB09	-	-	-
MOTOR	0.7, 1.1Nm	-	✓	-
	2.0,3.0,6.0Nm	-	-	-

S45



TYPE		LIGHT	STD	HD
O.D.		43.0mm	44.0mm	49.0mm
D/S TAPE		✓	✓	✓
T-SPLINE		✓	✓	✓
9mm FLAT SPLINE		-	-	-
CHAIN	RB07	✓	✓	✓
	RB08	✓	✓	✓
	RB09	✓	✓	✓
MOTOR	0.7, 1.1Nm	✓	✓	✓
	2.0,3.0,6.0Nm	✓	✓	✓
SPRING	ESA	✓	✓	✓

S60



TYPE		S60
O.D.		60.0mm
D/S TAPE		✓
T-SPLINE		-
9mm FLAT SPLINE		✓
CHAIN	RB07	-
	RB08	-
	RB09	✓
MOTOR	0.7, 1.1, 2.0Nm	-
	3.0,6.0Nm	✓

BRACKETS | SINGLE


FEATURES & BENEFITS
- Easy-Lock assembly to simplify installation.
- Available in multiple styles.
- Specialised brackets optimised & designed for specific systems.
- Colour matched bracket covers to hide hardware.
- HD Adapter increases the standard bracket's strength for larger motors.





MOUNTING SOLUTIONS




OPTIONS


40 & 55 PITCH


COVERS



HD ADAPTER

black
pure white
sandstone
silver grey

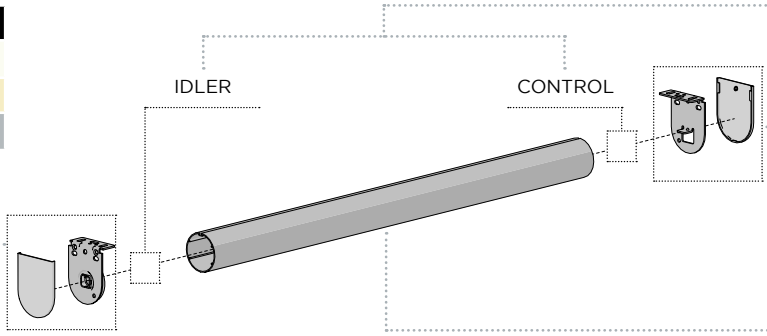


HARDWARE
- CONTROLS
  - *CHAIN*
  - *MOTOR*
  - *SPRING*
- BRACKETS
  - *AX/VX/LX SERIES*
- TUBES
  - *S40 SERIES*
  - *S45 SERIES*


EASY-LOCK TECHNOLOGY
Slide the idler pin up the ramp located on the idler bracket.
Idler pin depresses and then extends once in place - securing the shade.

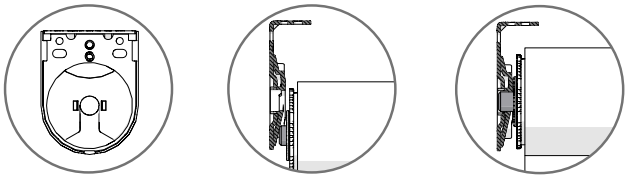

HEAVY DUTY ADAPTER
The HD Adapter is required for all 3.0Nm and 6.0Nm motors not using the LX M40 bracket series.

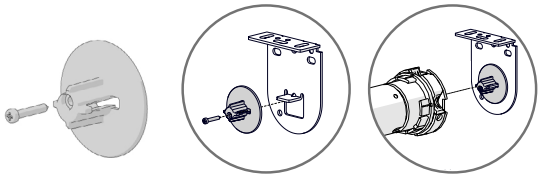

TECHNICAL DATA



PITCH	MAX ROLL
40mm	75mm
55mm	105mm


			BRACKET WIDTH [mm]	PITCH [mm]	BRACKET HEIGHT [mm]	BRACKET COVERS	WINDER		MOTOR			SPRING	IDLER		USE WITH					
							RB07/08	RB09	0.7, 1.1, 2.0Nm 5V	3.0Nm 12V	6.0Nm AC	ESA	RB08	RB09	S45 TO S60	MOUNTING RAIL	EASY-LINK	FRS VALANCE	P95	CF90
AX		A slim, Easy-Lock bracket, that is also a cost effective solution to suit narrow windows, doors or architraves.	40	40	60	✓	✓		✓	✓			✓			✓	✓			
				55	75										✓	✓	✓			
VX		Easy-Lock bracket that provides a clean silhouette to match hardware when seen without bracket covers.	50	40	65	✓	✓		✓	✓			✓			✓		✓	✓	✓
LX		Standard Easy-Lock brackets available in two visual styles, provides a refined, finished aesthetic.	50	40	65	✓	✓	✓	✓	✓			✓	✓		✓	✓	✓	✓	✓
				55	80										✓	✓	✓			

ROLLEASE ACMEDA

BRACKETS | DOUBLE

FEATURES & BENEFITS

- Combine sheer fabric and block-out fabric in one installation.
- Ultimate privacy while still allowing light into any given room.
- Easy-Lock assembly to simplify installation.
- Available in multiple configurations for every application.
- HD Adapter increases the standard bracket's strength for larger motors.
- Bracket covers offer a finished solution for Slim Profile double brackets.

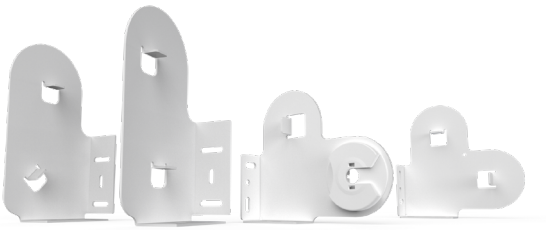


MOUNTING SOLUTIONS




COLOUR RANGE

- black
- pure white
- sandstone
- silver grey


OPTIONS



HD ADAPTER



RB09 Direct with Chain Guide

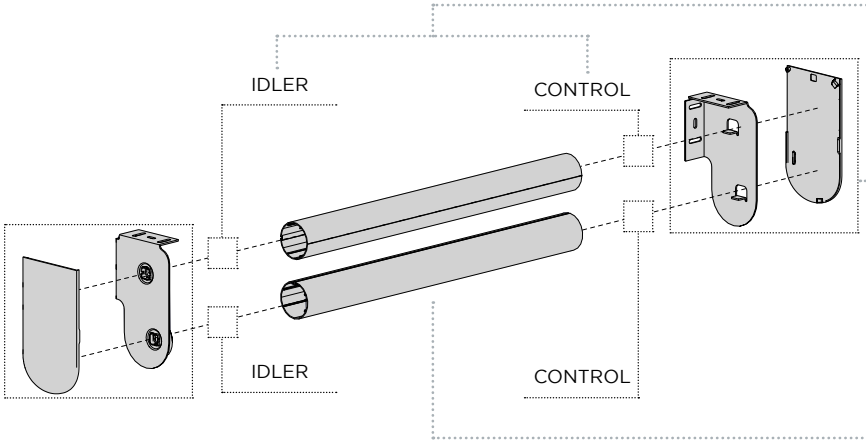


HARDWARE

CONTROLS
- *CHAIN*
- *MOTOR*

BRACKETS
- *SLIM PROFILE*
- *SQUARE-X*
- *SLIMLINE-X*


TUBES
- *S40 SERIES*
- *S45 SERIES*

FABRIC ORIENTATION

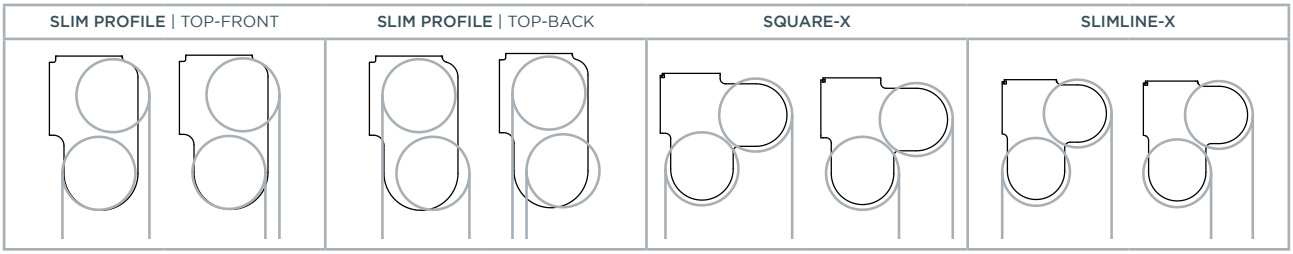


TECHNICAL DATA

SLIM PROFILE WITH RB09:
TOP FRONT *TOP BACK*



INCREASED DOUBLE BRACKET CAPACITY WITH THE HD ADAPTER

The HD Adapter is required for all 3.0Nm and 6.0Nm motors.

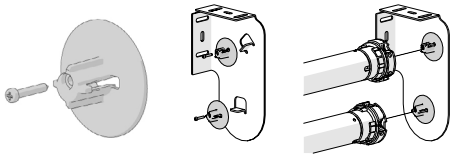

			MAX ROLL SIZE (x2)	BRACKET COVERS	WINDER		MOTOR	MOTOR & HD ADAPTER		IDLER		UPGRADE
					RB07/08	RB09	0.7, 1.1, 2.0Nm 5V	3.0Nm 12V	6.0Nm AC	RB07/08	RB09	EASY-LINK
SLIM PROFILE TOP FRONT		Top Front configured brackets use front over-rolled fabric to conceal both rolls. The Top Front chain control is installed on a 45° angle for improved operating experience.	70mm	✓	✓	✓	✓	✓	✓	✓	✓	✓
SLIM PROFILE TOP BACK		Slim profile bracket has both controls located on the same side to minimise footprint in living space. Top Back configured brackets have the back roll at the top for optimum light blocking.	70mm	✓	✓	✓	✓	✓	✓	✓	✓	✓
SQUARE-X		Square profile bracket with both tube controls located on the same bracket side.	70mm		✓	✓	✓	✓	✓	✓	✓	✓
SLIM-LINE-X		Square profile bracket with controls located on the opposite sides. Separating one chain control to each side simplifies operation for the user.	65mm		✓	✓	✓	✓	✓	✓	✓	

ROLLEASE ACMEDA

BOTTOM RAILS

FEATURES & BENEFITS

- Variety of sizes to suit all shade solutions.
- Multiple add-ons available to customise installation.
- Ends caps suitable to specific upgrades.
- Feed funnels available to assist in assembly.




COLOURS
REFER TO CATALOGUE


OPTIONS


BUBBLE SEAL


FABRIC BRUSH


BALLAST



FABRIC WRAP

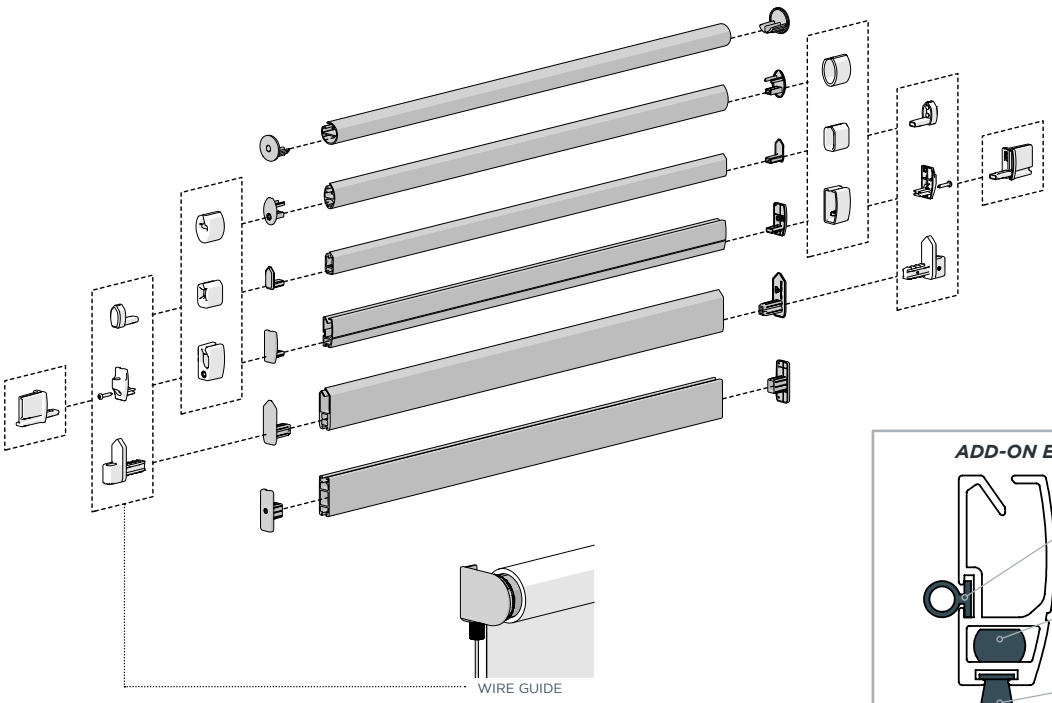


HARDWARE
BOTTOM RAILS

- *ROUND*
- *OVAL*
- *FLAT*
- *D30 SILENT*
- *F4115 HD*
- *FABRIC WRAP*

ADD-ON EXAMPLE | D30




TECHNICAL DATA

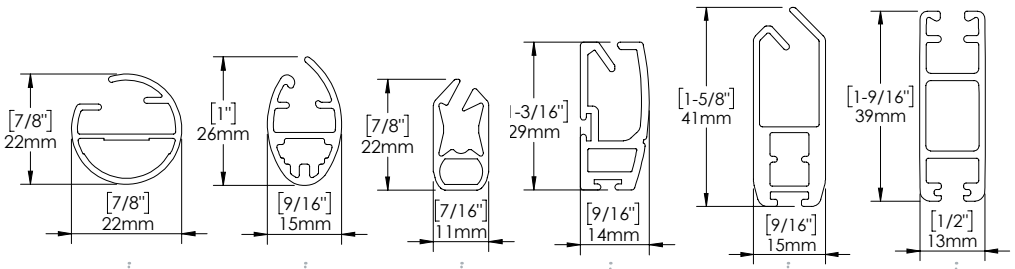









			BOTTOM RAIL COMPATIBILITY										
			FLAT SPLINE | 8.7mm	FLAT SPLINE | 9mm	FLAT SPLINE | 10mm	FLAT SPLINE | 15mm	FABRIC FEEDING FUNNELS	FABRIC WRAP	BALLAST	FABRIC BRUSH	BUBBLE SEAL	EDGE	WIRE GUIDE END CAPS
ROUND BOTTOM RAIL	Round aesthetic.	0.266 kg/m				✓			✓				
OVAL BOTTOM RAIL	Oval aesthetic.	0.284 kg/m			✓		✓		✓				
FLAT BOTTOM RAIL	Compact & small square design.	0.241 kg/m			✓		✓		✓				✓
D30 SILENT BOTTOM RAIL	Premium solution. Fabric brush & bubble seal compatible to reduces noise and light gap.	0.306 kg/m				✓	✓		✓	✓	✓	✓	✓
F4115 HD BOTTOM RAIL	Additional weight ballast achieves optimal fabric performance.	0.558 kg/m				✓			✓	✓	✓		✓
FABRIC WRAP BOTTOM RAIL	Suitable for fabric wrap solutions.	0.459 kg/m	✓	✓				✓	✓				

ROLLEASE ACMEDA

SYSTEM UPGRADES & OPTIONS

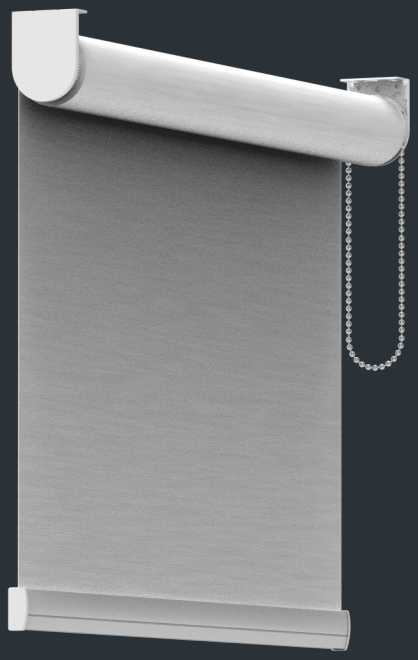

SYSTEM UPGRADES & OPTIONS

26	S45 TO S60 ADAPTOR		• Utilise S45 hardware with S60 tube to improve shade performance. • LX 55mm Brackets offer a larger maximum roll diameter with a slimmer aesthetic.
27	INTERNAL WIRE GUIDE		• Secure guide, aiding & controlling unwanted shade movement.
28	EASY-LINK		• Link multiple shades together while achieving a minimal light gap. • Control multiple shades with one control unit OR use a dual control set-up.
29	MOUNTING RAIL		• Solution for off-site assembly, achieving quicker installation times.
30	FRS VALANCE		• Decorative partial fascia to conceal the shade hardware. • Option to wrap the extrusion in the same fabric as the shade. • Extrusion is available in multiple sizes to suit medium to large fabric rolls.
31	PELMET 95		• Decorative partial fascia to conceal the shade hardware. • Option to wrap the extrusion in the same fabric as the shade.
32	CASSETTE FASCIA 90		• Premium decorative cover protects from dust. • Available in Round or Square profiles.
33	CF EDGE		• Edge is a light blockout upgrade to CF90

S45 TO S60 ADAPTOR

FEATURES & BENEFITS

- Utilise S45 hardware with S60 tubes to improve shade performance up to 3.4m x 2.4m.
- S45 55mm pitch LX Brackets achieve a larger roll diameter with a slimmer aesthetic.
- Use with 3.6m lengths of S60 Taped tube to reduce wastage.



MOUNTING SOLUTIONS




COLOUR RANGE

- black
- pure white
- sandstone
- silver grey

WEB PAGE LINK

SYSTEM UPGRADES

FRS VALANCE

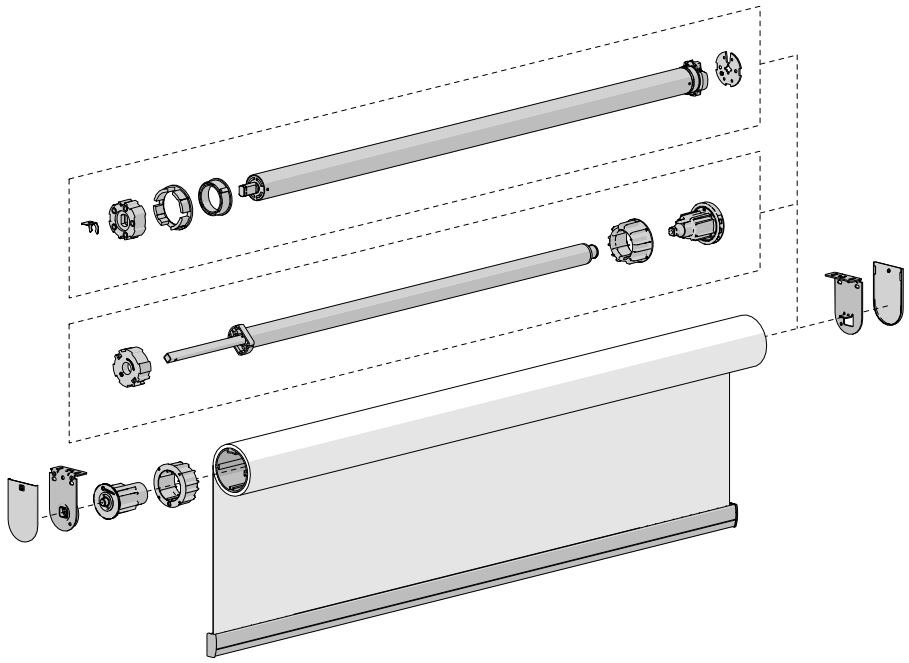

10 YEAR WARRANTY

HARDWARE

CONTROLS

MOTOR

CHAIN

BRACKETS

SINGLE | LX


TUBES

S60 SERIES

BOTTOM RAILS

REFER TO PAGE

SYSTEM CAPACITY

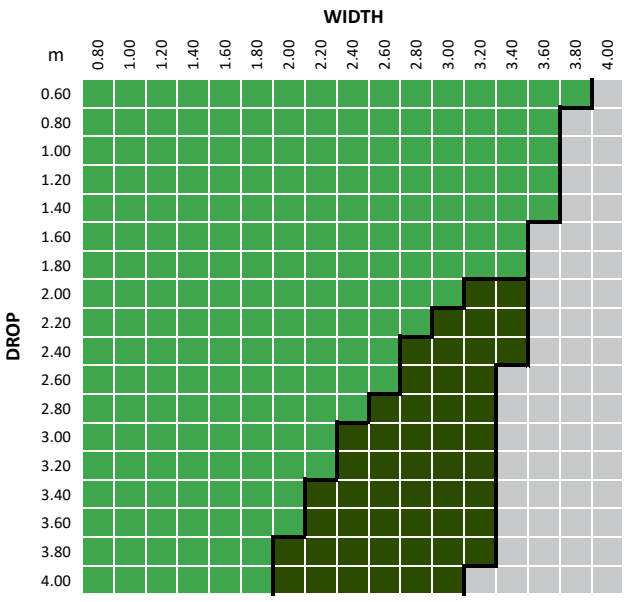

BOOSTER	
RECOMMENDED	
REQUIRED	
*OUTSIDE SPECIFICATIONS	

PARAMETERS:

FABRIC DENSITY: 390gsm

FABRIC THICKNESS: 0.6mm

WEIGHT BAR: D30 Bottom Rail


TUBE DEFLECTION: 1.05mm/m

TECHNICAL DATA


CONTROL OPTIONS	MINIMUM SHADE WIDTH (no covers)	TUBE DEDUCTIONS	
		NO BRACKET COVERS	WITH BRACKET COVERS
RB09 + HD BOOSTER	941mm	32mm	35mm
Li-ion 3.0Nm	943mm	34mm	36mm
E6	674mm		
M6	568mm		

TUBE WIDTH = SHADE WIDTH - [CONTROL + IDLER]

Minimum Shade Width based on 5mm gap between hardware in tube.

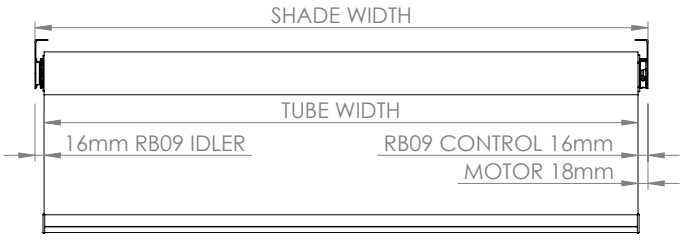

SINGLE BRACKETS	PITCH	WIDTH	HEIGHT	MAX ROLL
LX/LX M40	55mm	50mm	80mm	105mm



ROLLEASE ACMEDA

INTERNAL WIRE GUIDE

FEATURES & BENEFITS

- Provides a secure guide to control unwanted movement.
- Tensioners available for top or face mounting.
- Crimping and wire-cutting tools available.



MOUNTING SOLUTIONS




COLOUR RANGE

- black
- pure white
- sandstone
- silver grey

WEB PAGE LINK

BOTTOM RAILS

- *FLAT*
- *D30 SILENT*
- *F4115 HD*

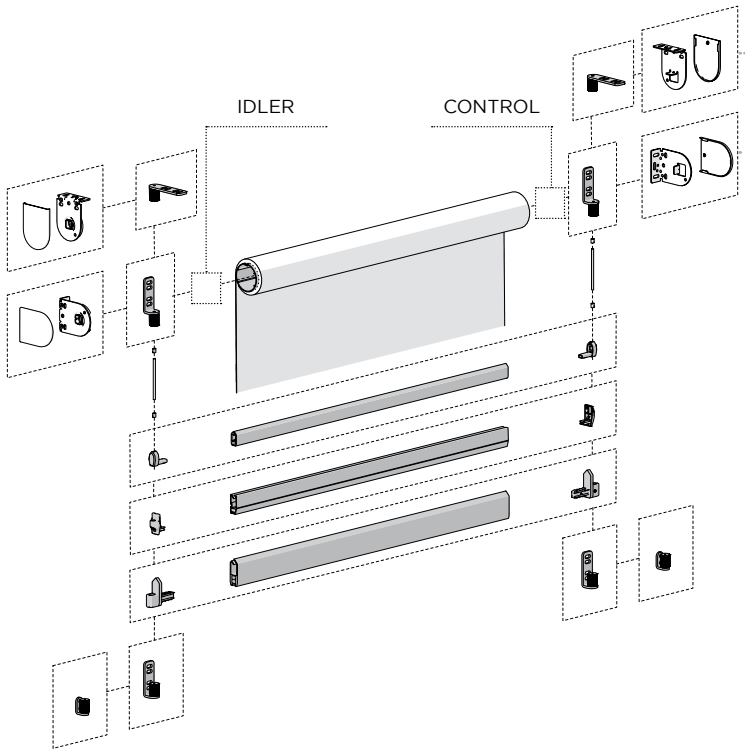

10 YEAR WARRANTY

HARDWARE

MOUNTING
- *TOP*
- *FACE*

CONTROLS
- *CHAIN*
- *MOTOR*
- *SPRING*


BRACKETS
- *SINGLE | AX*
- *SINGLE | VX/LX*


TUBES
- *S40 SERIES*
- *S45 SERIES*

TOOLS
- *CRIMPING*
- *WIRE CUTTING*

TECHNICAL DATA


DIMENSIONS

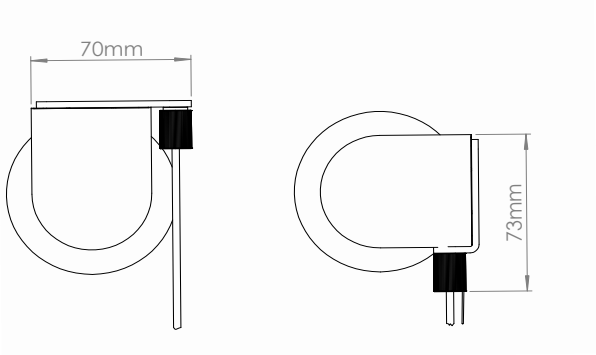



DEDUCTIONS


FLAT RAIL	28mm
D30 SILENT RAIL	32mm
F4115 HD RAIL	46mm
FABRIC	46mm
TUBE	Refer to manual

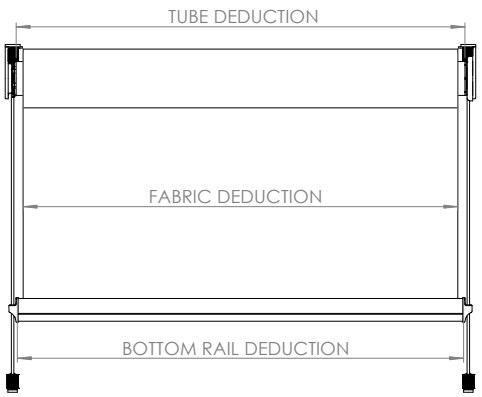

ROLLEASE ACMEDA

EASY-LINK

FEATURES & BENEFITS
- Control multiple shades simultaneously.
- Optional adaptor plug allowing for independent shade control, if required.
- Minimal 18mm light gap between shades.
- Roller bearing ensures quite & smooth operation.

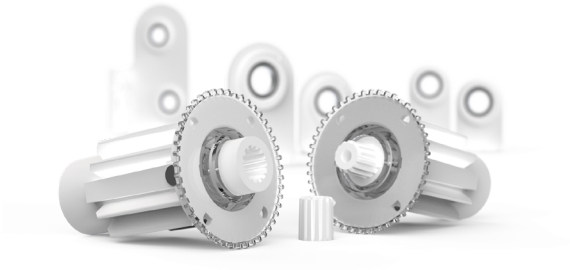


MOUNTING SOLUTIONS

TOP FACE


COLOUR RANGE
- black
- pure white
- sandstone
- silver grey

WEB PAGE LINK

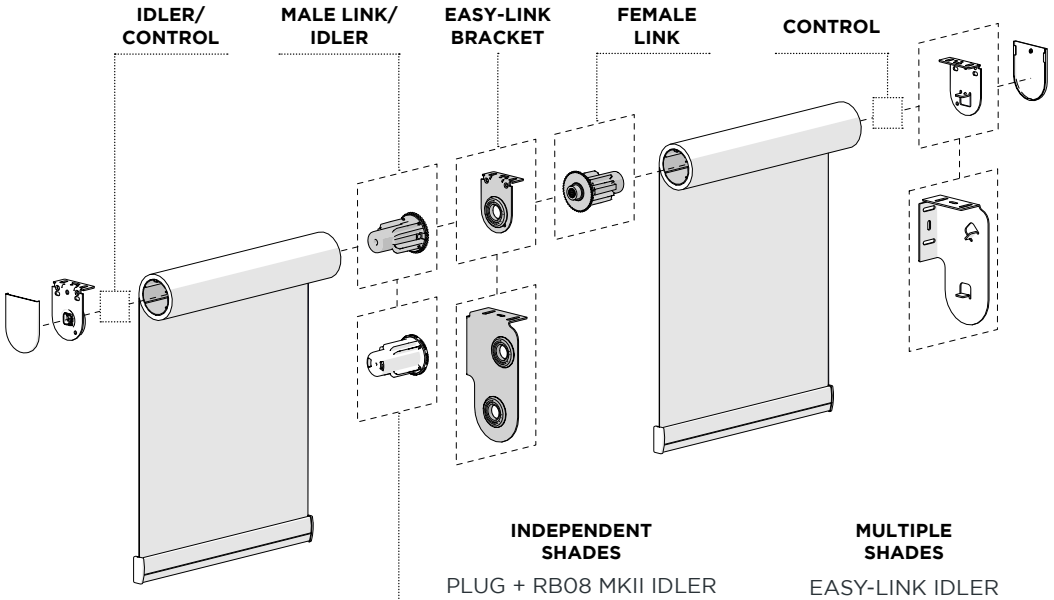


INDEPENDENT SHADES

PLUG + RB08 MKII IDLER



MULTIPLE SHADES

EASY-LINK IDLER



10 YEAR WARRANTY

HARDWARE

CONTROLS
- CHAIN
- MOTOR

BRACKETS
- SINGLE
- DOUBLE

TUBES
- S40 SERIES
- S45 SERIES

BOTTOM RAILS
- REFER TO PAGE

SYSTEM UPGRADES
- MOUNTING RAIL
- FRS VALANCE
- P95 PELMET


SYSTEM FEATURES

MULTIPLE SHADES




Cost effective control of multiple shades.

INDEPENDENT SHADES



Control each shade independently.

BOTTOM RAIL ALIGNMENT

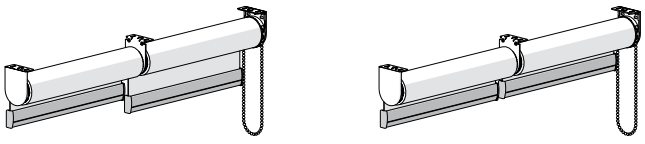

Bottom Rail alignment can be adjusted during installation.


TECHNICAL DATA

MAX WEIGHT OF SYSTEM AFTER 1ST LINK

TUBES	STD	HD
S40	15.5kg	15.3kg

TUBES	LT	STD	HD
S45	14.1kg	13.9kg	12.5kg

Max torque of Easy-Link connection is 3Nm.

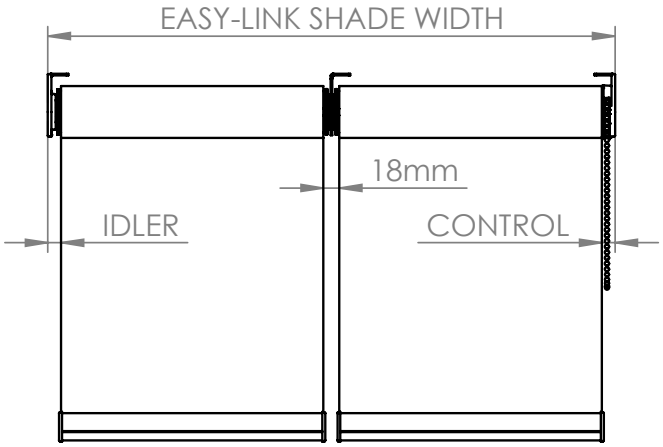

ROLLEASE ACMEDA

MOUNTING RAIL

FEATURES & BENEFITS

- Option to completely assemble shade off-site for installation.
- Quick snap fit installation into the Universal Mounting Brackets.
- Curved design to maximise the roller drop.
- Compatible with LX/VX brackets.
- Dedicated bracket covers to match mounting rail silhouette.



MOUNTING SOLUTIONS




COLOUR RANGE

pure white

WEB PAGE LINK

SYSTEM UPGRADES

EASY-LINK

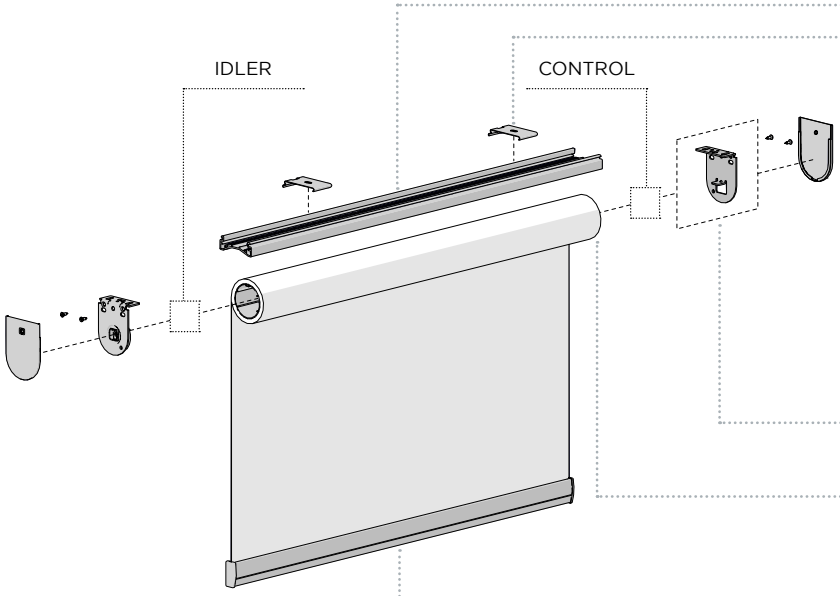


10 YEAR WARRANTY

HARDWARE

RAIL EXTRUSION
BASE 50
MOUNTING
UNIVERSAL CLIP
CONTROLS
CHAIN
MOTOR
SPRING
BRACKETS
SINGLE
TUBES
S40 SERIES
S45 SERIES
BOTTOM RAILS
REFER TO PAGE


KEY SYSTEM FEATURES

PREFABRICATE + QUICK INSTALL

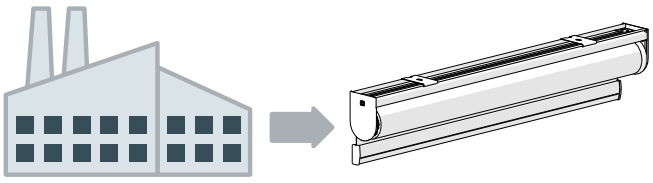


Simplified Off-site Assembly.

SNAP FIT INSTALLATION

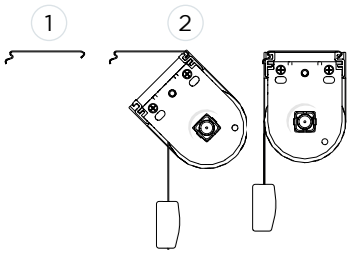


1. Install Bracket.
2. Snap-In assembly.

AESTHETICS




Dedicated bracket cover

TECHNICAL DATA

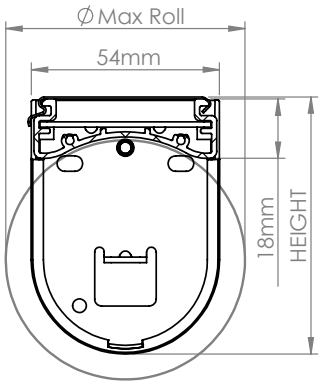


RAIL BASE		50mm
WIDTH		54mm
COVERS		✓
HEIGHT	LX/VX 40	70mm
	LX 55	97mm
MAX ROLL	LX/VX 40	75mm
	LX 55	90mm

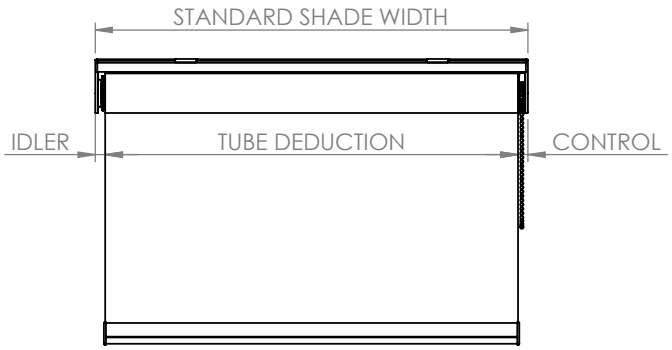

ROLLEASE ACMEDA

FRS VALANCE

FEATURES & BENEFITS
- Decorative cover.
- Available in 100mm & 120mm extrusions.
- Universal mounting.
- Snap-lock attachment of Valance.
- Recess application free of end caps.

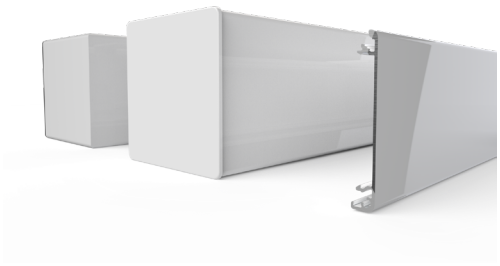

MOUNTING SOLUTIONS




COLOUR RANGE

- black
- pure white
- silver grey

WEB PAGE LINK

SYSTEM UPGRADES

EASY-LINK

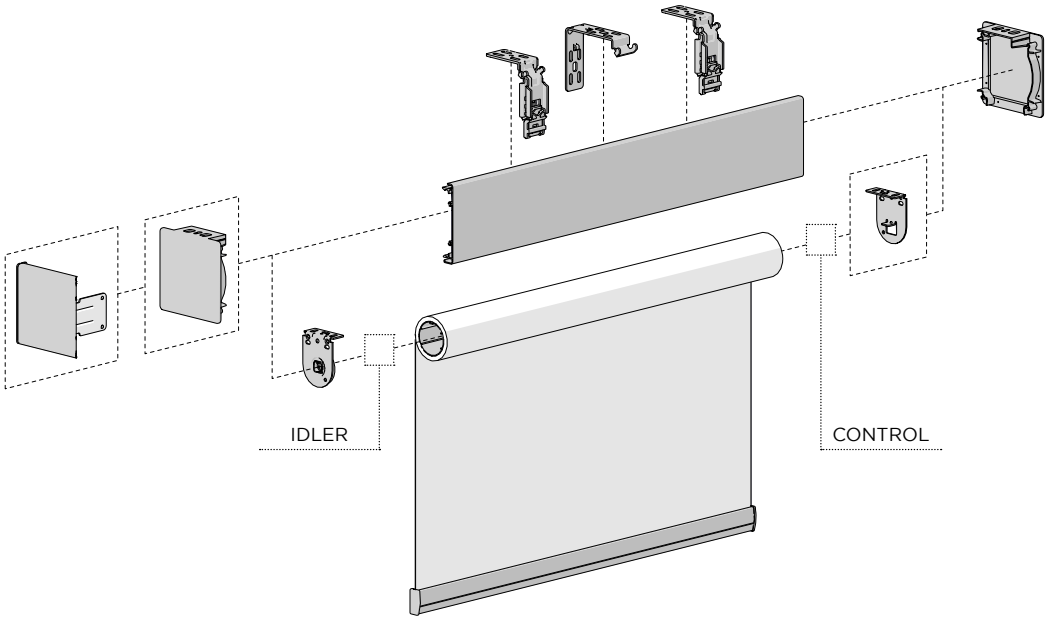

10 YEAR WARRANTY

HARDWARE

MOUNTING
SNAP LOCK

FRS VALANCE
FRS 100
FRS 120

CONTROLS
CHAIN
MOTOR
SPRING


BRACKETS
SINGLE | VX/LX

TUBES
S40 SERIES
S45 SERIES

BOTTOM RAILS
REFER TO PAGE


SYSTEM FEATURES

EXTRUSION OPTIONS




100 & 120

FABRIC WRAP




Round & Flat Spline

FRS CORNER RETURN

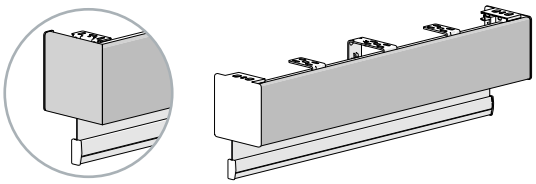


The FRS extrusion can be used as end caps for a uniform look.

TECHNICAL DATA

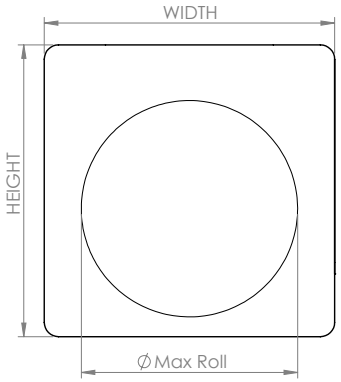

FRS	WIDTH	HEIGHT	MAX ROLL
100	102mm	103mm	76mm
120	123mm	124mm	92mm

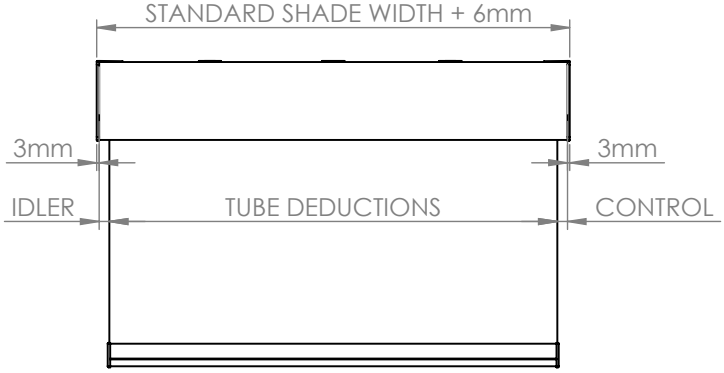


ROLLEASE ACMEDA

PELMET 95

FEATURES & BENEFITS

- Spring loaded mounting brackets in Universal or Top/Face configurations.
- Colour coded end caps for optimised aesthetics.
- Fabric wrapping is optional.
- Zebra shade is optional.
- Screw feature to ensure secure hold of roller shade brackets to P95 extrusion.

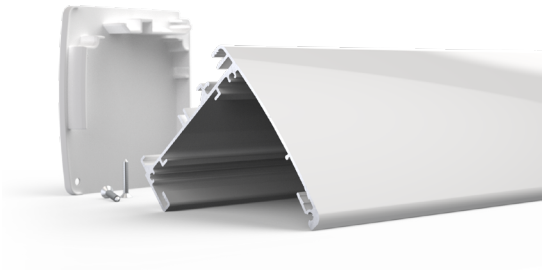

MOUNTING SOLUTIONS



TOP FACE


COLOUR RANGE

- black
- pure white
- silver grey

WEB PAGE LINK

SYSTEM UPGRADES

EASY-LINK

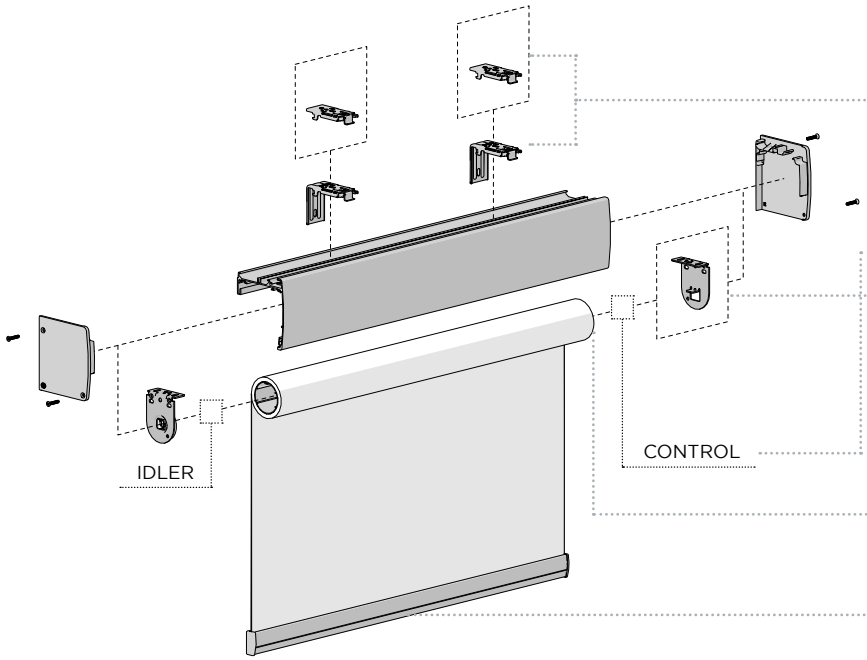

10 YEAR WARRANTY

HARDWARE

MOUNTING
- *TOP*
- *UNIVERSAL*

CONTROLS
- *CHAIN*
- *MOTOR*
- *SPRING*


BRACKETS
- *SINGLE | VX/LX*

TUBES
- *S40 SERIES*
- *S45 SERIES*

BOTTOM RAILS
- *REFER TO PAGE*


KEY SYSTEM FEATURES

SECURE ASSEMBLY




Lock brackets in place.

EASE OF INSTALLATION




Universal OR Top Fix.
Simple push, align and release.

FABRIC WRAP




Match the pelmet extrusion to fabric.

ZEBRA SHADE




Compatible with Zebra fabric.

TECHNICAL DATA

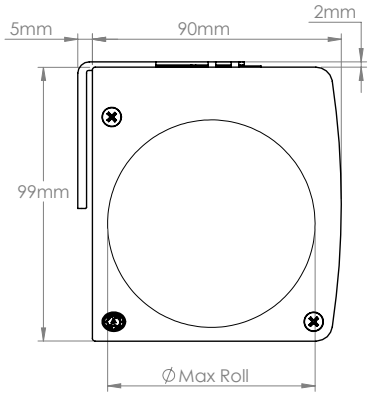

FABRIC HANGING	MAX ROLL
FRONT	65mm
BACK	75mm

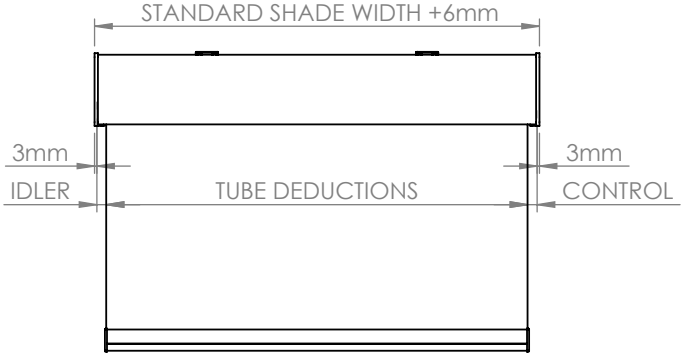


ROLLEASE ACMEDA

CASSETTE FASCIA 90

FEATURES & BENEFITS

- Quick install with slimline mounting bracket for Top & Face installations.
- Install directly through cassette (no brackets used) to ceiling or wall to minimise light bleed.
- Optional Edge upgrade for an improved light blockout solution.
- Contemporary round or square head box options.

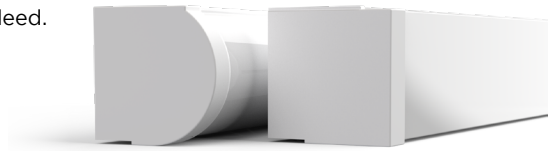

MOUNTING SOLUTIONS



TOP FACE


COLOUR RANGE

- black
- pure white
- sandstone
- silver grey

WEB PAGE LINK

SYSTEM UPGRADES

EDGE

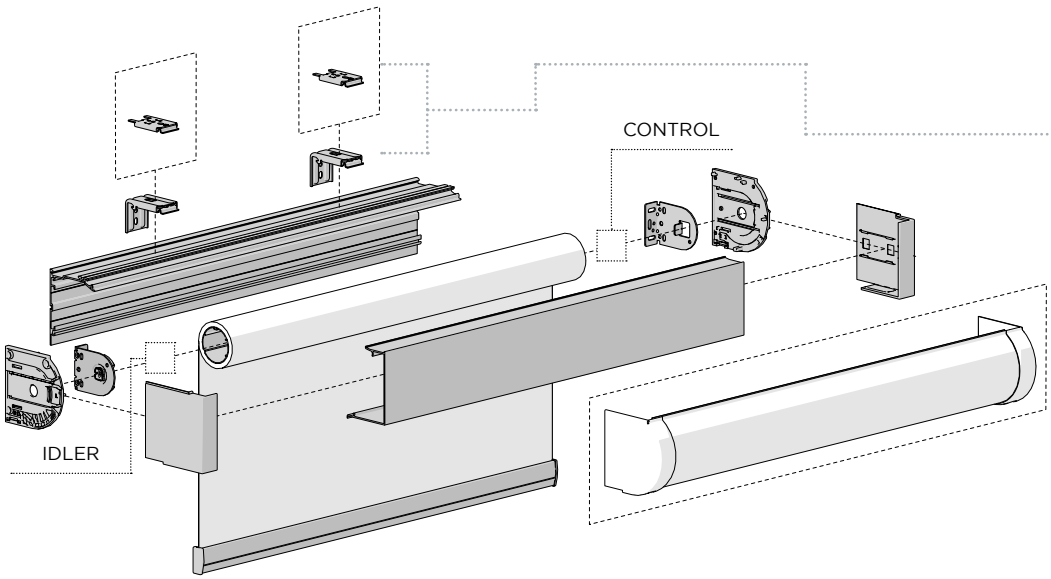

10 YEAR WARRANTY

HARDWARE

MOUNTING
- *TOP*
- *FACE*

HEAD-BOX
- *SQUARE*
- *ROUND*

CONTROLS
- *CHAIN*
- *MOTOR*
- *SPRING*


BRACKETS
- *SINGLE | VX/LX*

TUBES
- *S40 SERIES*
- *S45 SERIES*


BOTTOM RAILS
- *REFER TO PAGE*

SYSTEM FEATURES

PREFABRICATE + QUICK INSTALL




Simplified off-site Assembly.



Face OR Top Fix Brackets. Simple push, align and release.


Optional: *Fix cassette directly to ceiling for minimal light bleed.*

EXTRUSION OPTIONS

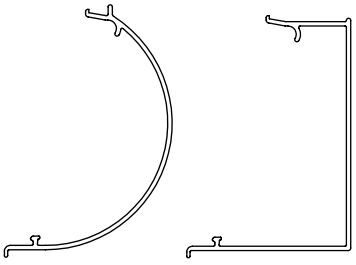


Square & Round options available.


CHAIN GUIDE



Unique chain guide for smooth operation.

TECHNICAL DATA

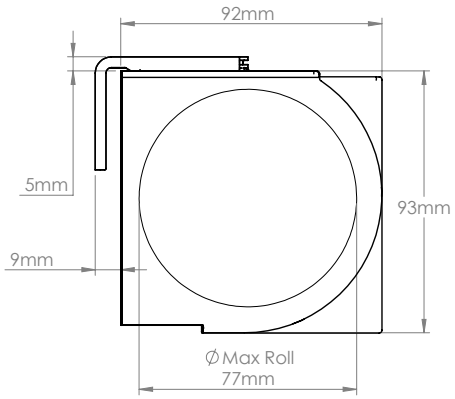

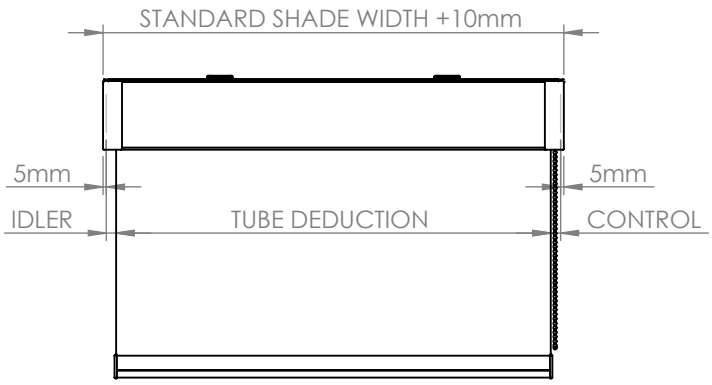

ROLLEASE ACMEDA

CF EDGE

FEATURES & BENEFITS

- Adaptable to both CF75 and CF90, for improved energy efficiency and light blockout.
- Two-piece Edge side guides for improved face and recess installation.
- Colour matched to CF suite hardware for a seamless finish.



MOUNTING SOLUTIONS




TOP FACE

COLOUR RANGE

- black
- pure white
- sandstone
- silver grey

WEB PAGE LINK



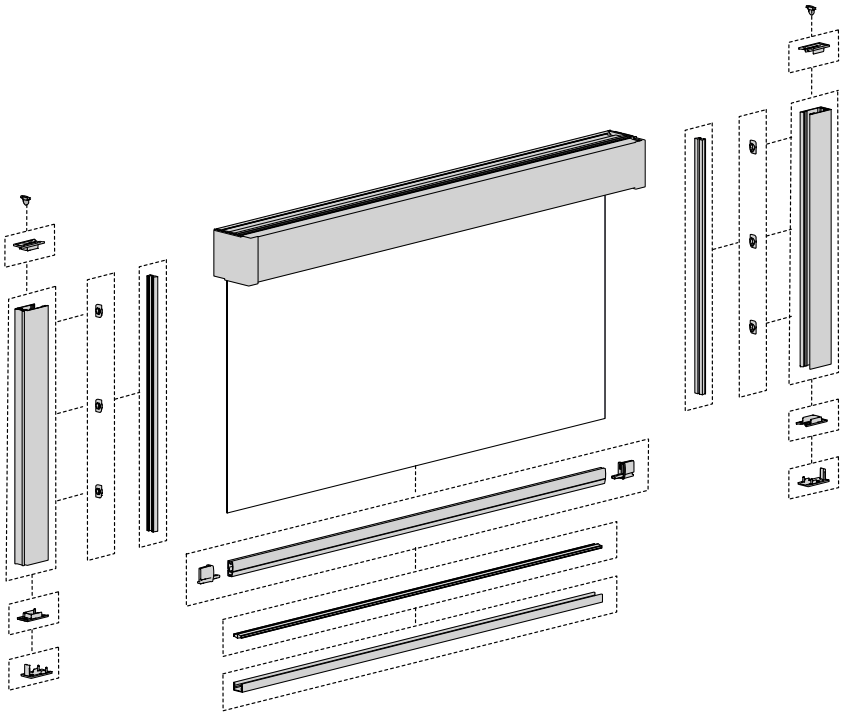

10 YEAR WARRANTY

HARDWARE

CONTROLS

CHAIN


MOTOR

BOTTOM RAILS

D30 SILENT


KEY SYSTEM FEATURES

NEW D30 END CAP




New D30 End Cap for Edge creates a light seal between the fabric and side guides.

LIGHT BLOCKOUT SOLUTION




Completely darkens the room.

BOTTOM SILL RAIL



Blocks light beneath the bottom rail.


INSTALLER JIG




Installer jig saves time during installation.

TECHNICAL DATA

SIDE VIEW



FRONT VIEW

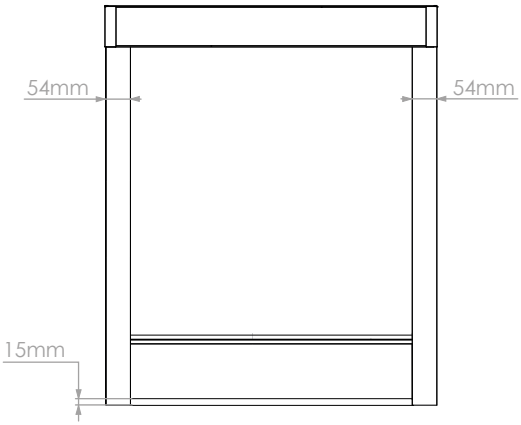

ROLLEASE ACMEDA