

Child Safe Wand Motor

Retrofit

Upgrade manual shade systems by simply swapping the clutch for a motor, eliminating the need to re-make the shade.


Wand Control

A 36" inch slimline wand is used to operate the motor with basic up, down and stop functionality.

Child Safe


A entry level motor with basic functionality to support our child safe suite of products.

Dimensions

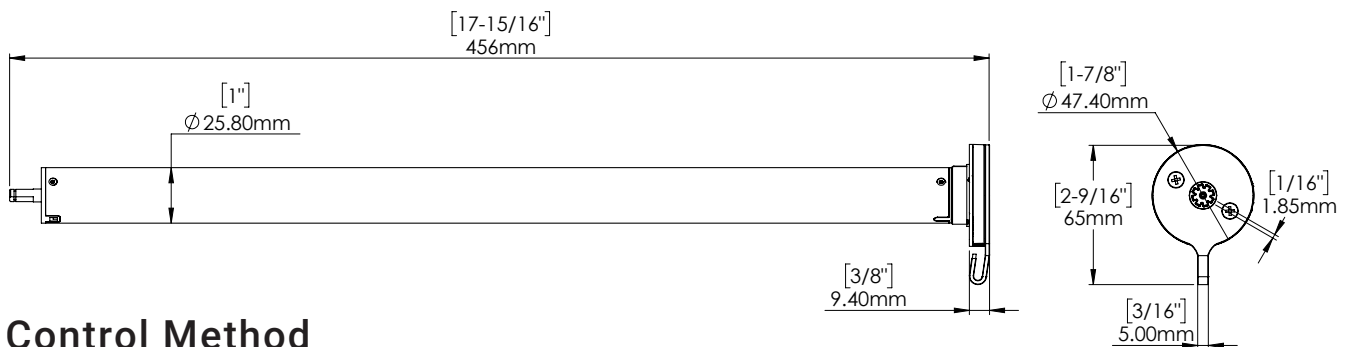

Control Method

*Wand Control 36"



Product Specifications

Voltage	5V-DC
Torque	1.1Nm
Max Run Time	12 min.
Speed	20 RPM (Adjustable to 25 or 30)
IP Rating	IP20
Temp Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	III

Limit Switch Type	Electronic
Current	0.80 A
Battery Size/Type	2600mAh
Sound Level	32dBA, testing under ISO3745
Power	9.6 W
Motor - Part #	MT01-1325-069021-CT
Wand - Part #	MT03-0301-069034

Motor Head Adaptors

MTAD-252835-RS AUTOMATE
Bracket Adaptor R8 SERIES

RB40-1402-069401 AUTOMATE
Bracket Adaptor S45

MTAD-252835-SL AUTOMATE
Bracket Adaptor Skyline Series

