


# BRACKETS | DOUBLE

## FEATURES & BENEFITS

- Combine sheer fabric and block-out fabric in one installation.
- Ultimate privacy while still allowing light into any given room.
- Easy-Lock assembly to simplify installation.
- Available in multiple configurations for every application.
- HD Adapter increases the standard bracket's strength for larger motors.

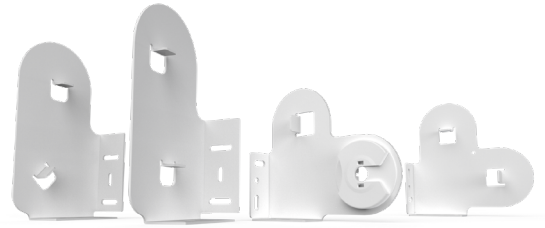

## MOUNTING SOLUTIONS




**COLOUR RANGE**

- black
- pure white
- sandstone
- barley
- silver grey

**OPTIONS**

HD ADAPTER

\*RB07 CHAINWINDER

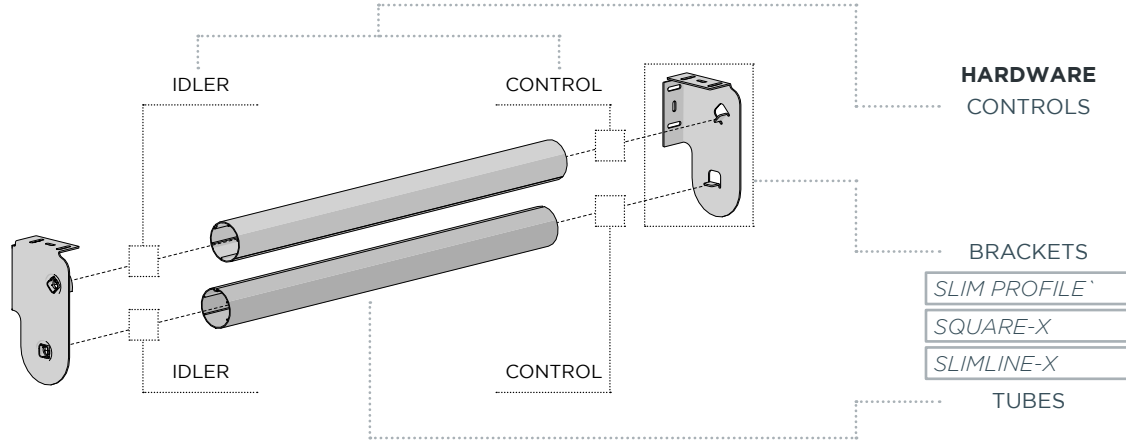

## FABRIC ORIENTATION

SLIM PROFILE   TOP-FRONT*	SLIM PROFILE   TOP-BACK*	SQUARE-X	SLIMLINE-X

## TECHNICAL DATA

*\*SLIM PROFILE BRACKETS REQUIRE FIXED GUIDE RB07 CHAIN CONTROL*

Rollease Acmeda recommends Slim Profile double brackets use the RB07 Chainwinder in the top position. The RB07 chainguard extends past the chainwinder housing, minimising chain contact with the bottom chainwinder. Please note, there are different deductions for each chainwinder.

*INCREASED DOUBLE BRACKET CAPACITY WITH THE HD ADAPTER*

The HD Adapter is required for all 3.0Nm and 6.0Nm motors.

			MAX ROLL SIZE (x2)								
			WINDER	MOTOR	MOTOR & HD ADAPTER	SPRINGS	IDLER	UPGRADE			
			RB07/08	RB09	1.1Nm/2.0Nm 5V	3.0Nm 12V	6.0Nm AC	ESU / ESW	RB07/08	RB09	EASY-LINK
<b>SLIM PROFILE TOP FRONT</b>		Top Front configured brackets use front over-rolled fabric to conceal both rolls. The Top Front chain control is installed on a 45° angle for improved operating experience.	70mm	✓	✓	✓	✓	✓	✓	✓	✓
<b>SLIM PROFILE TOP BACK</b>		Slim profile bracket has both controls located on the same side to minimise footprint in living space. Top Back configured brackets have the back roll at the top for optimum light blocking.	70mm	✓	✓	✓	✓	✓	✓	✓	✓
<b>SQUARE-X</b>		Square profile bracket with both tube controls located on the same bracket side.	70mm	✓	✓	✓	✓	✓	✓	✓	✓
<b>SLIM-LINE-X</b>		Square profile bracket with controls located on the opposite sides. Separating one chain control to each side simplifies operation for the user.	65mm	✓	✓	✓	✓	✓	✓	✓	✓