

EASY SPRING ULTRA

Rollease Acmeda Easy Spring Ultra single roller system offers a high quality, aesthetically pleasing and technologically advanced spring controlled solution. The blind will open to your preferred top location in a smooth and controlled motion, with one simple touch.

**AESTHETIC FEATURES**


- Minimal light gaps
- Color matched bracket covers provide a neat overall finish
- Round enclosed headbox

**PRODUCTION / ASSEMBLY FEATURES**

- Pre-tensioning through Spring Head Control
- Single Top Limit Setting function, simple and intuitive to set the limit
- Color coded LH & RH hardware for quick & easy assembly
- Universal Single Stop Limiter for both orientations

**FUNCTIONAL BENEFITS**

- Auto-rise functionality with manual lowering
- Top limit setting for an easy user experience
- Can be installed onto wall, ceiling & inside fix applications
- Patent protected
- Decelerator for smooth controlled movement
- Compatible with Link System (refer to charts)

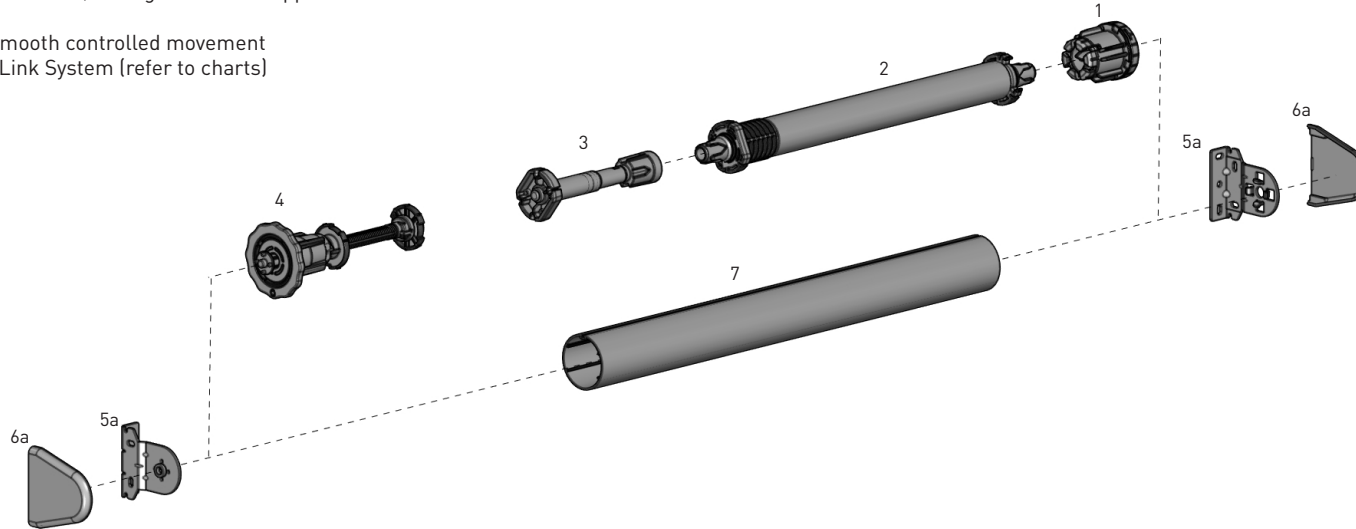

SYSTEM INDEX

1	Spring Control
	RB12-3200-xxx0xx - 1.5"/S45
2	Booster Uni.
	RB12-xx00-2690xx - 1.5"/S45 Short
	RB12-xx01-0690xx - 1.5"/S45 Light
	RB12-xx02-3380xx - 1.5"/S45 Standard
	RB12-4503-050045 - S45 Heavy Duty
3	Booster Decelerator
	RB12-7102-xxx2xx - 1.5"/S45 RH
	RB12-7101-xxx1xx - 1.5"/S45 LH
4	Limiter - Single Stop   Universal
	RB12-6000-xxx0xx - 1.5"/S45
5a	Skyline STD Bracket - Single Stop Limiter 1.5"
	RB12-2501-xxx038
b	Single Stop Limit LX Bracket
	RB12-2503-xxx040
c	1.5" Cassette Brackets
	RB12-2502-xxx038
6a	Skyline Bracket Cover
	SLBCxx
b	VX/LX Bracket Cover Caps   S40/45
	RB08-4151-xxx040
7a	Rollease Tube + M/P Tape   38mm
	RTEA-4T05-000580
b	T-Spline Aluminium Tube   S45
	RB93-044x-000580


COLOR RANGE



pure white  
069


SYSTEM UPGRADES

Cassette 100/120




USE 1.5" CASSETTE 100/120 BRACKETS

Link System




CF90




USE VX/LX BRACKETS

PRODUCT OPTIONS

Economy Idler



S45 Roller Shade  
(refer catalog)




Mounting Rail



USE VX/LX BRACKETS


**SPECIFICATIONS**

**MAX ROLL**

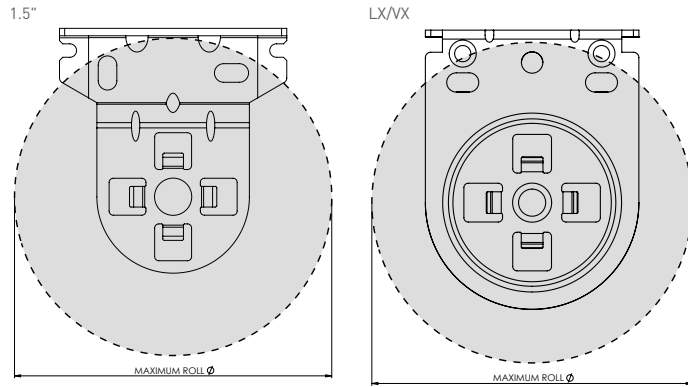

MAXIMUM ROLL SIZE CHART		
1.5" Bracket	78mm	3.071"
VX/LX withOUT Mounting Rail	78mm	3.071"
VX/LX with Mounting Rail	72mm	2.835"

**DEDUCTION**

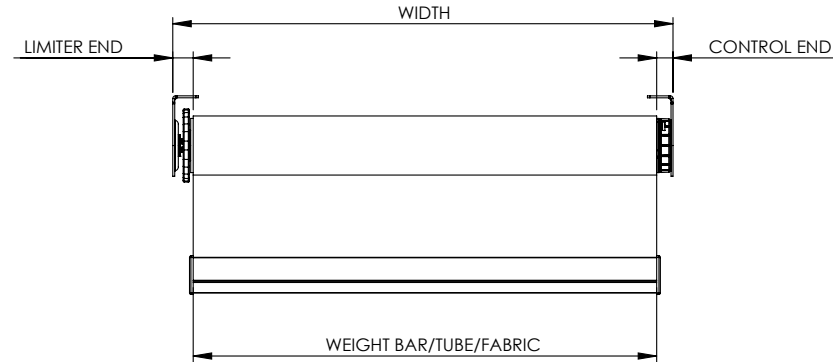

CONTROL TYPE	CONTROL END		LIMITER END		
	With Covers	WithOUT Covers	With Covers	WithOUT Covers	
1.5"	1.5" + SL Bracket	18mm [0.71"]	16mm [0.63"]	20mm [0.79"]	18mm [0.71"]
	Cassette 100/120	15mm [0.59"]	13mm [0.51"]	21mm [0.83"]	18mm [0.71"]
S45	VX/LX	15mm [0.59"]	14mm [0.55"]	19mm [0.75"]	18mm [0.71"]
	CF90	18mm [0.71"]		22mm [0.87"]	

**SYSTEM CAPACITY**

DROP	WIDTH																	ft	
	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		
ft	m	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0
2	0.6																		
	0.8																		
	1.0																		
4	1.2																		
	1.4																		
	1.6																		
6	1.8																		
	2.0																		
	2.2																		
8	2.4																		



LEGEND	DESCRIPTION
Light Blue	1.5" (38mm) & S45   All Tubes
Medium Blue	S45   All S45 Tubes & 1.5" (38mm) Easy Link/Infinite Link
Dark Blue	S45   STD/HD & 1.5" (38mm) Easy Link/Infinite Link
Black	S45   HD & 1.5" (38mm) Easy Link/Infinite Link
Yellow	1.5" (38mm) & S45   STD Linked Systems (Single Blinds Only)
Grey	Cannot be achieved - outside product specifications

\*Minimum Blind Width = 660mm [26"]

**TUBE SPECS**

USA

AU/EU






**1-1/2" Rollease Tube + M/P Tape**

Code: RTEA4T  
 OD: 38.6mm [1.5"]  
 Length: 3.7m [12ft], 4.9m [16ft]

**1-1/2" Rollease Tube + M/P Tape**

Code: RTEA-4T05-000LLL  
 OD: 38.6mm [1.5"]  
 Length: 5.8m [19.029ft]



**S45 LIGHT T-Spline Tube**

Code: RB93-0443-000LLL  
 RB93-6443-000LLL [with D/S tape]  
 OD: 43mm [1.69"]  
 Length: 5.8m [19.029ft]

**S45 STANDARD T-Spline Tube**

Code: RB93-0444-000LLL  
 RB93-6444-000LLL [with D/S tape]  
 OD: 44mm [1.73"]  
 Length: 5.8m [19.029ft]

**S45 HEAVY DUTY T-Spline Tube**

Code: RB93-0449-000LLL  
 RB93-6449-000LLL [with D/S tape]  
 OD: 49mm [1.92"]  
 Length: 5.8m [19.029ft]