

# AUTOMATE™ | ACML 6

Part #: MTACML35 - 6

Description: 35mm AC Tubular motor with mechanical limits.

## FEATURES


- Recommended max shade size 120"x120"
- Simple limit setting and adjustment
- "Slim Head" design minimizes light gap

## TECHNOLOGIES



MECHANICAL  
LIMIT

## DIMENSIONS

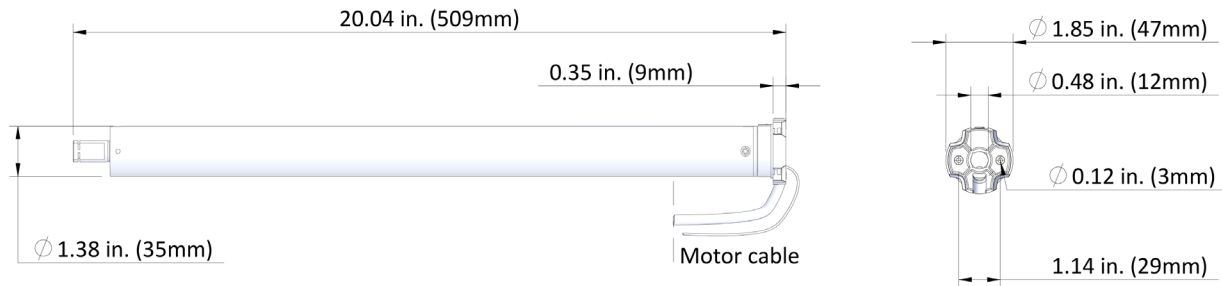

## SPECIFICATIONS

<b>Voltage</b>	110-120 A/C	<b>IP Rating</b>	IP44
<b>Torque</b>	6.0Nm	<b>Limit Switch Type</b>	Mechanical
<b>Max Run Time</b>	4 Min	<b>Amps</b>	0.85A
<b>Speed</b>	33 RPM	<b>Temp Working Range</b>	32°F to 140°F (0°C to 60°C)
<b>Sound Level</b>	~44 DB	<b>Insulation Class</b>	III

Leading innovator of precision hardware and automated shade solutions.

USA | AUSTRALIA | EUROPE [rolleasacmeda.com](http://rolleasacmeda.com)


PORG\_MTACML35 - 6\_V1.0 FEB 2017

© 2017 Rollease Acmeda Group



**ROLLEASE  
ACMEDA**  
PRECISION IN MOTION


## APPLICATIONS



ROLLER SHADE



ROMAN SHADE



WOOD BLIND

## COMPATIBLE SYSTEMS

- Skyline
- S45 Roller Shades

## COMPATIBLE TUBES

- 2"
- 40mm Octagonal (3rd party product)
- S45

## WIRING GUIDE

Wire Color	Function
White	Neutral
Black	Direction 1
Red	Direction 2
Green	Ground

## ACCESSORIES

<b>CROWN AND DRIVES</b>	Descr: Crown & Drive Set for 35mm motor in 2.0" Rib tube Part #: MTCRDR-35-2
	Descr: Crown & Drive Set for 35mm motor in 2.0" OCT tube Part #: MTCRDR-35-2-OCT
	Descr: Crown & Drive Set for 35mm motor in S45 Tubes Part #: MTCRDR-35-S45
<b>BRACKET ADAPTERS</b>	Descr: Motor Adapter 25/28/35mm to SKY 6nm Part #: MTAD-252835-SL
	Descr: Motor Adapter 25/28mm to SKY 12nm v2 White Part #: MTAD-25-28-SLV2W
	Descr: M40 H/D Universal Disc Adapter S45 White Part #: RB40-1402-069400

